


Tools Required:

- 3mm hex key
- #20 Torque head driver
- Phillips medium screwdriver



- Dimensions**
- A: 4-3/4 "
- B: 4-3/4 "
- C: 5-5/8 "



Protection Class: IP65

Weight: 3.20 lbs.


Notice to Installer for 33 327:

1. See page 2 for specific product safety warnings.
2. Mounts directly to a standard octagonal 4" wiring box (by others) using mounting kit (supplied).
3. Integral LED module and driver provided by BEGA within luminaire housing.

33 327 - installation:

1. Loosen (2) 3mm housing torque-head screws and remove outer casting and lens.
2. Install (2) long 8-32 x 1/2" mounting screws (provided) in the back of the adapter plate as shown.
3. Attach adapter plate to wiring box using (2) 8-32 x 1/2" screws provided. Feed luminaire wires through luminaire base and around adapter plate.
4. Make supply wiring and luminaire wiring connections in the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Place a small bead of silicone around the back side of the luminaire base that will come in contact with the finished wall (exterior applications only).
6. Attach luminaire base to adapter plate over the mounting screw using the (2) nuts provided in the mounting kit. Tighten the nuts to back the screws into the wiring box and secure the plate to the box.
IMPORTANT: note position of orientation arrow on mounting plate and install accordingly.
8. Replace outer casting and glass and tighten (2) screws, making sure the gasket is seated properly.

Fig.1

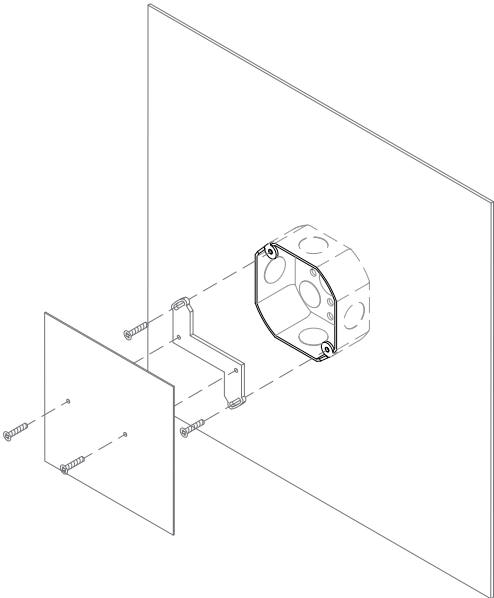

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	11281311
Lens gasket	831156
LED module	LED-0261/830
LED driver	76024

Lamp: 4.3W LED module

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
