

Tools Required:

Phillips medium screwdriver



**Dimensions**  
A: 14-1/2 "  
B: 3-1/2 "



**Weight:** 8.2 lbs.

**Notice to Installer for 33 639:**

- 1. Mounts directly over a standard recessed 4" octagonal wiring box (by others).
- 2. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and mounting surface.

**WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

**33 639 - Installation:**

- 1. Twist glass counter-clockwise to remove from luminaire housing.
- 2. Feed the luminaire wiring through the luminaire housing.
- 3. Make supply wiring and luminaire wiring connections inside the wiring box:  
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE


**Dimming (if applicable):**

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE  
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

- 4. Attach the housing directly to the surface over a 4" standard octagonal wiring box using sufficient hardware (by others).
- 5. To replace glass, rotate clockwise into housing.

**NOTE:** use the mounting detail for mounting hole and wiring box location.

**Figure 1**

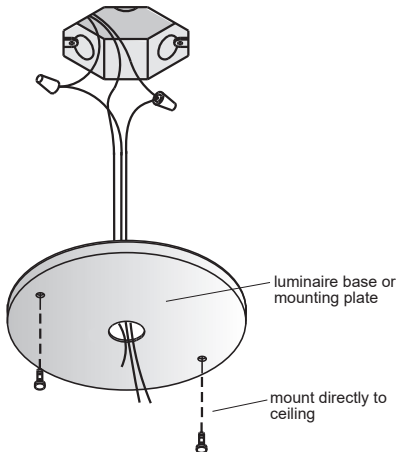

**Relamping/Maintenance**

Twis glass counter-clockwise and remove from housing. Clean glass using only solvent-free cleaners. Replace glass into luminaire housing by rotating clockwise.

**Lamp:** 34.8W LED

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

| Description        | Part No           |
|--------------------|-------------------|
| Lens & Gasket      | 11277940          |
| Driver (120-277V)  | 75985-03          |
| LED module (3000K) | (x2) LED-0452/830 |
| LED module (4000K) | (x2) LED-0452/840 |

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---