


Tools Required:

3mm hex key



Dimensions

- A:** 2-3/4 "
- B:** 14-7/8 "
- C:** 4 "
- D:** 3 "



Protection Class: IP65

Weight: 2.0 lbs.



Notice to Installer for 44 009:

1. For wall applications only.
2. Mounts directly to recessed BEGA 19 538 wiring box (provided) using mounting plate (provided).
3. In conformance with UL Standard 1598, a silicone based sealant **MUST** be used between luminaire and supporting wall.

44 009 - installation:

1. Unscrew and remove glass lens.
2. Feed luminaire wiring through stainless steel mounting plate and into the wiring box.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
4. Attach stainless steel mounting plate to 19 538 wiring box. (Figure 1)
5. Attach mounting strap to mounting plate using (2) 8-32 screws (by others).
6. Mount luminaire over mounting strap and tighten set screw at bottom of luminaire.
7. Replace lens.

Figure 1 (Generic Image)

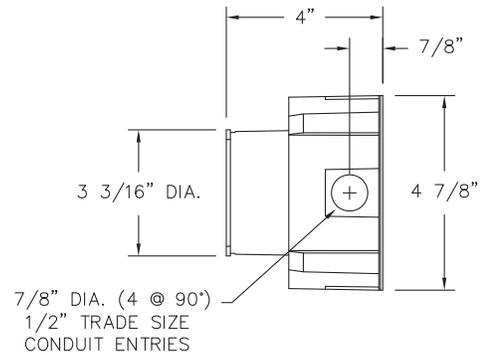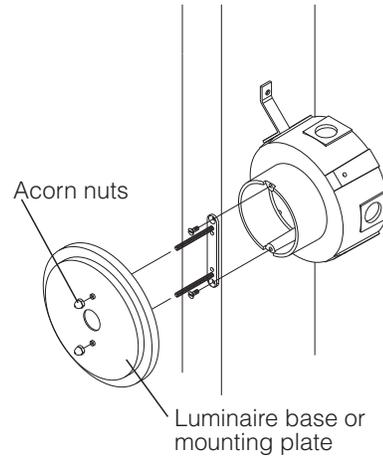

WIRING BOX DETAIL

Relamping/Maintenance

Carefully unscrew and remove lens with attached gasket to relamp. Clean luminaire and lens using only solvent-free cleansers. Replace lens.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Glass with gasket	11271541
Driver (120-277V)	76066
LED Module (3000K)	LED-0253/830
LED Module (4000K)	LED-0253/840

Small Opening Wiring Box 19 538

Lamp: 1.9W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

CAUTION - RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

ATTENTION - RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
