


BEGA

Photometric Filename: 24009.IES

TEST: BE_24009
TEST LAB: BEGA
DATE: 6/29/2017
LUMINAIRE: 24 009
LAMP: 36.2W LED

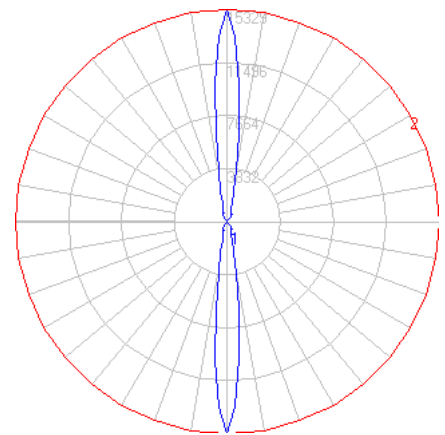


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3344
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	84
Total Luminaire Watts	40
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	0.40 ft (Diameter)
Luminous Height	0.00 ft

Zonal Lumen Summary

Zone	Lumens
0-10	750.75
10-20	450.94
20-30	315.13
30-40	134.80
40-50	8.06
50-60	7.25
60-70	4.07
70-80	0.79
80-90	0.34
90-100	0.34
100-110	0.79
110-120	4.07
120-130	7.25
130-140	8.06
140-150	134.80
150-160	315.13
160-170	450.94
170-180	750.75

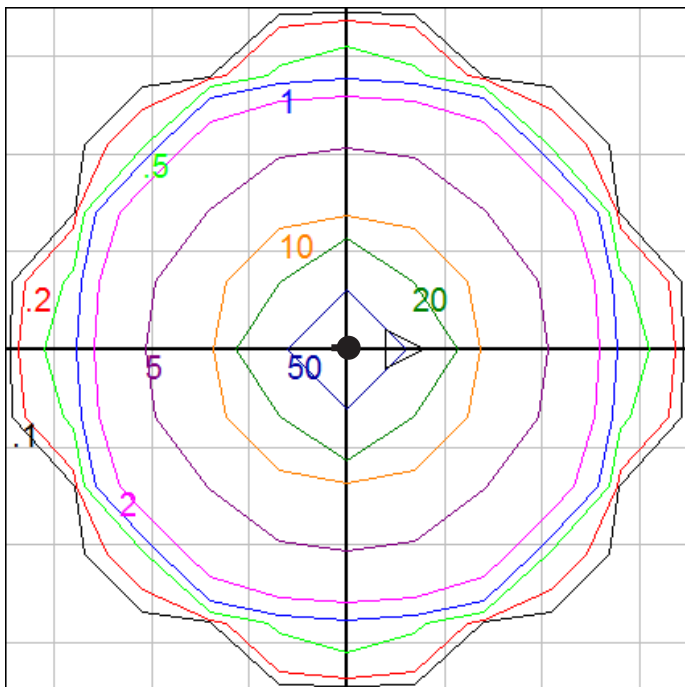

Wall mount fixture - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 2.5 ft.

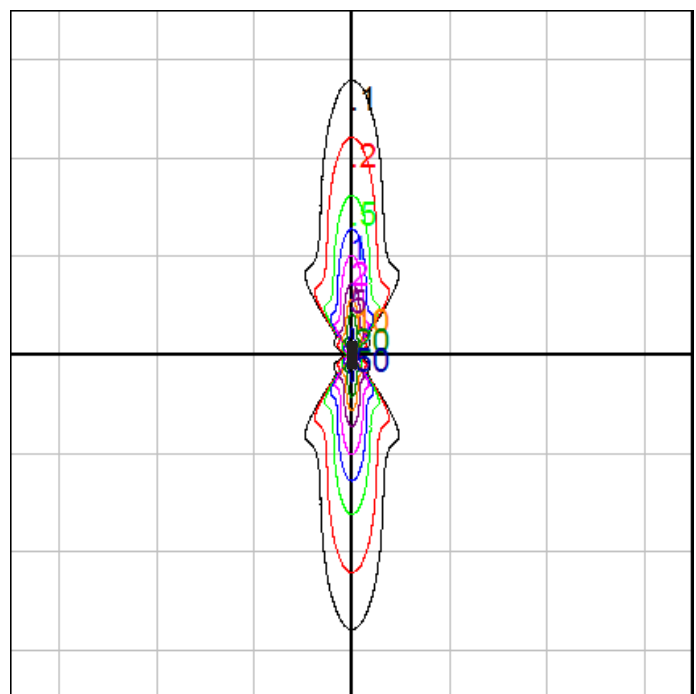

Wall mount fixture- Isofootcandle grid on wall
Grid Spacing = 15 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.