

Tools Required:

Flat head screw driver medium
Phillips head screw driver medium

Weight: 13.1 lbs.

Dimensions

A: 7-3/8"
B: 19 "
L: 236 "



Notice to Installer for 50 234:

1. See page 2 for specific product safety warnings.
2. Mounts directly to standard recessed 4" octagonal wiring box (by others).
3. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

Caution: Fixture length cannot be modified in the field. Consult factory for custom lengths.

50 234 - installation:

1. Unscrew steel cable griplock to separate canopy cover from canopy mounting plate.
2. Feed driver wires through canopy mounting plate.
3. Make supply wiring and driver wiring connections inside the wiring box (by others):


MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DIM CONTROL WIRE

4. Mount canopy baseplate directly to standard recessed 4" octagonal wiring box (by others).
5. Move canopy cover up to the ceiling/canopy mounting plate and tighten steel cable griplock to secure.

Figure 1: Mounting Canopy (Generic Image)

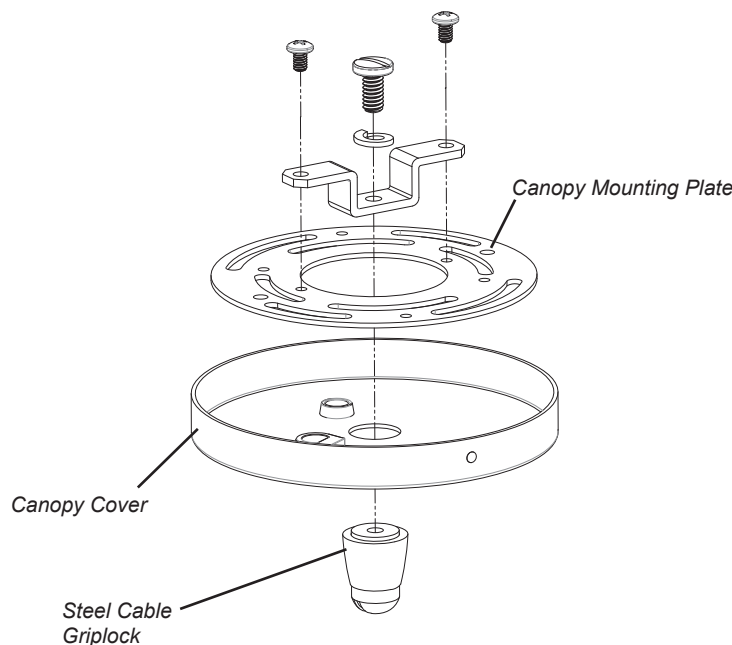

Relamping/Maintenance

Unscrew glass by turning counter-clockwise. Clean glass and luminaire using on solvent-free cleansers. Replace glass.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Opal Glass	
LED driver (120-277V)	75999-03
LED module (3000K)	(x2) LED-0660/830
LED module (4000K)	(x2) LED-0660/840
Downlight	
LED driver (120-277V)	75999-03
LED module (3000K)	LED-0678/830
LED module (4000K)	LED-0678/840

Lamp: 13.6W LED Opal Glass
17.0W LED Downlight

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
