


Tools Required:

- 2.5mm hex screwdriver

Overview:

LED Watts: 16.2W
System Watts: 20.0W
Controllability: Triac, ELV, 0-10V dimmable
Weight: 4.9 lbs.



Dimensions


- A: 5"
B: 6-3/8"
C: 6-3/8"
D: 3"



Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Select the desired trim ring or housing finish by using appropriate code number as suffix:
50601.1 – White
50601.2 – Stainless Steel
3. Mounts directly onto horizontal single-gang wiring box (by others).
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

Figure 1: Mount Plate Set Screw

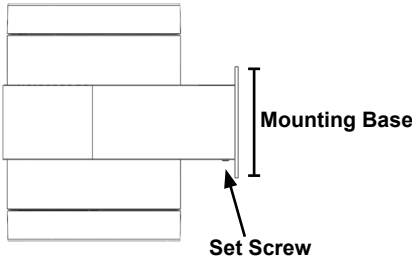

Installation: Luminaire

1. Using a 2.5mm Hex screwdriver, remove mounting plate from luminaire by loosening set screw at base of luminaire. [Figure 1]
2. Lead the mains supply cable through the cable entry of the mounting plate.
3. Attach mounting plate to horizontal single gang wiring box using hardware (by others).
4. Make connections from supply wires to driver wires:
MAIN VOLTAGE SUPPLY WIRE TO BLACK DRIVER WIRE(S);
NEUTRAL (COMMON SUPPLY WIRE TO WHITE DRIVER WIRE(S);
GREEN GROUND WIRE TO GREEN DRIVER WIRE(S).
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
5. Attach mounting plate to horizontal single gang wiring box using hardware (by others).
6. Fasten luminaire to mounting plate and secure using a 2.5mm Hex screwdriver

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.