


Tools Required:

- 3mm hex key
- 11/32" Nut driver
- Philips medium screwdriver
- Adjustable wrench



Dimensions

- A: 9-1/2"
- B: 3-3/8"



Protection Class: IP65


Weight: 3.1 lbs.

Notice to Installer for 55 115:

1. BEGA luminaires may be damaged if connected to conduit systems containing water- Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".
2. Mounts directly to a standard octagonal 4" wiring box (by others) using mounting kit (supplied).
3. In conformance with U.L. Standards 1598, a silicone-based sealant MUST be used between the mounting plate edge and supporting wall.
4. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

55 115 - installation:

1. Carefully unscrew diffuser from luminaire base to remove.
 2. Feed luminaire wires through fixture base, IP nipple, and center hole in mounting strap.
 3. Make supply wiring and luminaire wiring connections inside the octagonal wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):**
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
4. Attach mounting strap (provided) to wiring box using outlet box screws (by others).
 5. Attach 1/4" nipple to mounting strap (provided) and place luminaire over nipple.
 6. Use lockwasher and nut (provided) to secure luminaire on nipple. Tighten screw.
 7. Replace lens and screw in to secure, making sure that the gasket is seated properly.

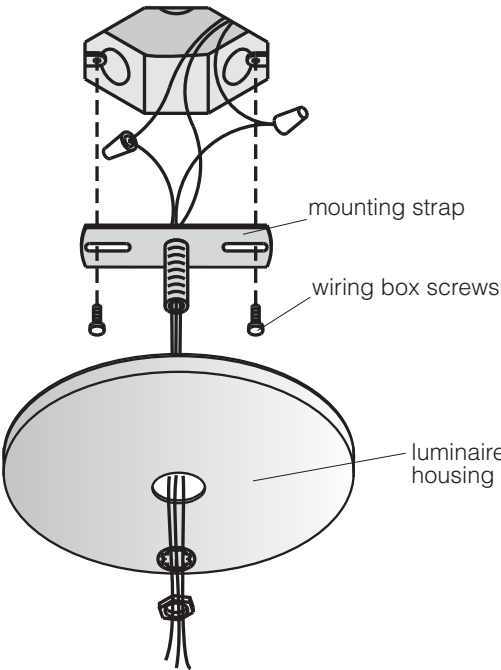

Relamping/Maintenance
No relamping required.

Accessories
Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts	
Description	Part No
Lens	112671.1
Lens Gasket	830845W
LED Driver (120-277V)	76023
LED Module (3000K)	LED-0488/930
LED Module (4000K)	LED-0488/940

Lamp: 3W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

CAUTION - RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

ATTENTION - RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
