

Application

Recessed wall luminaire with unshielded light for use as a location luminaire for way finding.

Materials

BEGA Tricoat ®, a 3-layer finishing technology for increased corrosion protection

NRTL listed to North American Standards, suitable for wet locations

Protection class IP 65

Weight: 1.7 lbs.

Electrical

|                           |                |
|---------------------------|----------------|
| Operating voltage         | 120-277V AC    |
| Minimum start temperature | -30° C         |
| LED module wattage        | 1.9W           |
| System wattage            | 6.0W           |
| Controllability           | 0-10V dimmable |
| Color rendering index     | Ra > 80        |
| Luminaire lumens          | 198lm          |
| LED service life (L70)    | 60000 hrs      |

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

|                      |              |
|----------------------|--------------|
| Black (BLK)          | Bronze (BRZ) |
| Silver (SLV)         | White (WHT)  |
| Natural Bronze (NTB) | RAL:         |
| CUS:                 |              |

Type:

BEGA Product:

Project:



Modified:

Available options

|        |                                 |
|--------|---------------------------------|
| CUS    | Custom finish                   |
| DALI-2 | Enabled for DALI control system |
| MGU    | Marine grade undercoat          |
| NTB    | Natural bronze (premium finish) |
| RAL    | RAL Classic, matte finish       |

Included (available for pre-shipment)

|         |                      |
|---------|----------------------|
| BB24011 | Installation housing |
|---------|----------------------|

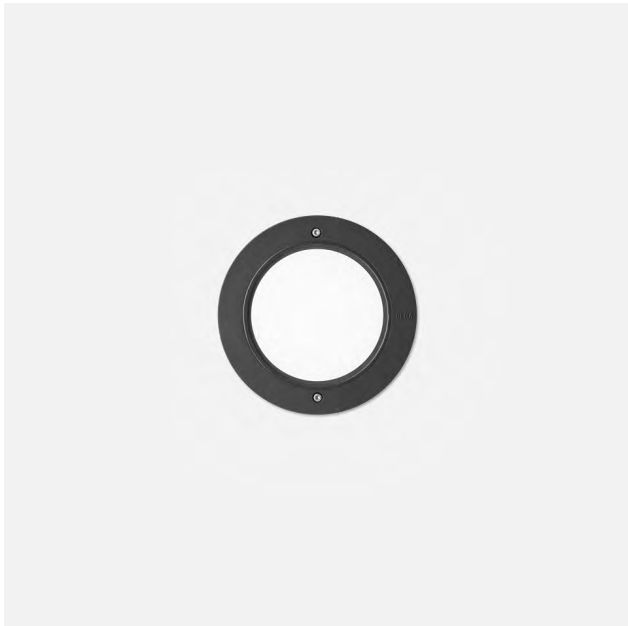

| Recessed wall luminaire · Unshielded · location |     |      |       |       |
|-------------------------------------------------|-----|------|-------|-------|
|                                                 |     | LED  | A     | B     |
| B24016                                          | ADA | 1.9W | 5 1/8 | 5 1/2 |