



Tools Required:

- 30mm drill bit or whole saw
- Adjustable wrench
- 3mm hex key
- 2mm hex key



Dimensions

A: 2"

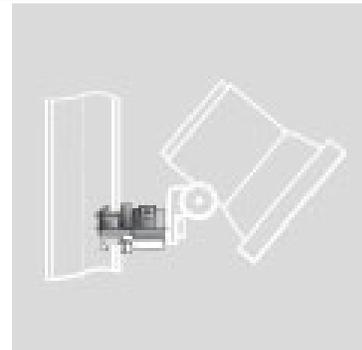

Weight: 0.33 lbs.

Accessory 71 042:

Material: 1/2" I.P.S. pole coupler constructed of die-cast aluminum and stainless steel.


Notice to the installer for 71 042 Accessory:

1. For use with BEGA floodlights equipped with 1/2" I.P.S. nipple:
Maximum allowable weight: 11.0 lbs
2. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
3. For installation on round poles: minimum diameter 2-1/2", maximum diameter 8-5/8".



Accessory 71 042 - installation:

1. Tilt or lay pole down into horizontal position and stabilize.
2. Mark desired location of pole coupler and drill 30mm opening.
3. Loosen (2) 3mm set screws on sides of coupler sleeve and remove.
4. Loosen coupler stainless steel ring by turning counter-clockwise, but do not remove.
5. Insert coupler into drilled opening and tighten stainless steel ring to secure (torque = 30Nm).
6. Attach coupler sleeve over stainless steel ring and secure by tightening (2) 3mm set screws.
7. Route floodlight cable through 71 042 accessory opening and secure floodlight to coupler by threading 1/2" I.P.S. nipple into female threads on accessory.
8. Secure floodlight by tightening 2mm set screw on side of 71 042 sleeve.
9. Refer to luminaire installation instructions for wiring information.

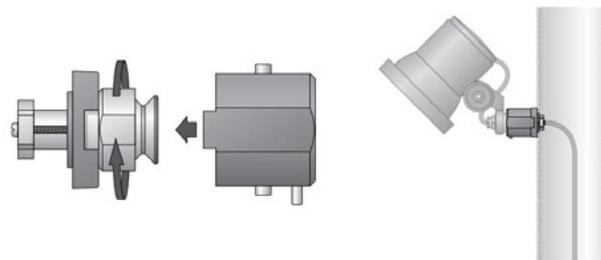

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.