


Tools Required:

5mm hex key
6mm hex key
8mm hex key
Adjustable wrench

Protection Class: IP65

Weight: 33 lbs.


Dimensions


A: 31-1/2 "
B: 19-7/8 "


Notice to Installer for 77 208:

1. Do not open luminaire.
2. For pole top applications only.
3. Slip fits 3" O.D. pole top or tenon.
4. Luminaire requires at least 3-1/2" of straight diameter pole or tenon.
5. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

77 208 assembly:

1. Loosen the (2) 8mm hex screws at the top of the support rods and remove screws and fixing plates.
2. Attach the reflector disk to the support rods by positioning the joint shells over the joint bearings. Make sure the drip edges are oriented downwards.
3. Replace the fixing plates and screws.
4. Tilt the reflector to the desired orientation (0-30 degrees). Consult factory for non-adjustability option.
5. Tighten the (2) 8mm screws to secure in place.

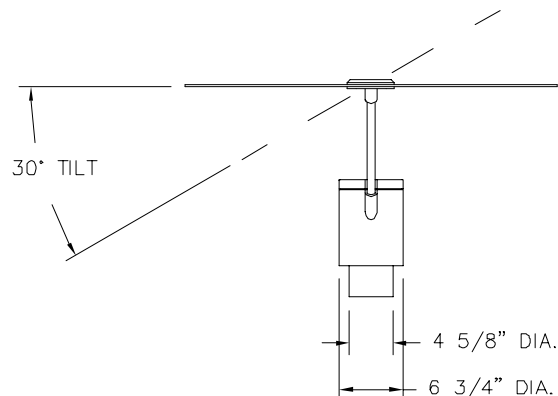
77 208 - installation:

1. Carefully hinge down pole, exposing bottom of pole.
2. Route the luminaire wiring through to the pole top base and slip luminaire over the top of the pole.
3. Tighten the (8) 5mm set screws evenly to secure to pole.
4. Make wiring connections from luminaire wires to driver wires by attaching the (2) quick-connect terminals securely.

NOTE: ONLY attach luminaire wires to specified driver wires.

6. Make supply wiring connections to gear tray wires:
MAIN VOLTAGE SUPPLY WIRE TO BLACK DRIVER WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE DRIVER WIRE
GREEN GROUND WIRE TO GREEN DRIVER WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

7. Replace pole to upright position and secure by tightening (3) base bolts.
IMPORTANT: PLEASE NOTE THE WEIGHT OF LUMINAIRE HEAD ON POLE AND TAKE CAUTION ACCORDINGLY DURING POLE TILT.

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens	140996
Lens gasket	830563
Driver (120-277V)	
LED Module (3000K)	LED-0721/830
LED Module (4000K)	LED-0721/840

Lamp: 35.7W LED

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLES.

LES FILS D'ALIMENTATION 90°C MIN.