


Tools Required:

- 5mm hex key
- Small flat head screwdriver
- Adjustable Wrench



- Dimensions**
- A: 9"
 - B: 11-3/4"
 - C: 9"



Protection Class: IP65

Weight: 8.8 lbs.


Notice to Installer for 77 653:

1. See page 2 for specific product safety warnings.
2. It is the installing contractor's responsibility to provide the necessary blocking around the junction box to ensure that the mounting plate or accessory (by others) is properly secured.
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.
4. Provided with a stainless steel nipple threaded 1/2" I.P.S. for direct attachment to cast boxes or a selection of mounting accessories (by others).
5. Integral LED module and LED driver supplied by BEGA.
6. Do NOT remove moisture absorption packet from luminaire housing.
7. LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation

77 653 - installation:

1. Make supply wiring and luminaire wiring connections inside the wiring box (by others):
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
If applicable:
DIMMING CONTROL WIRE (+) TO PURPLE DRIVER WIRE
DIMMING CONTROL WIRE (-) TO GREY DRIVER WIRE
2. Screw and secure mounting bushing into the female thread provided on site.
3. To adjust head angle, use 5mm hex key to loosen adjustment screw. Adjust luminaire head and tighten adjustment screw.

Figure 1

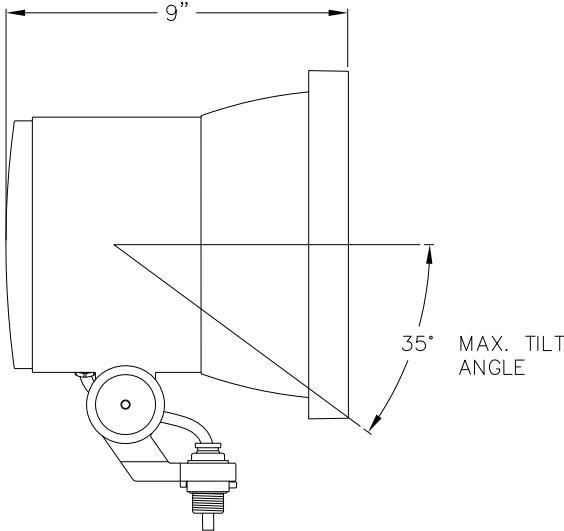

Relamping/Maintenance		Accessories		Replacement Parts	
Remove trim and lens by loosening screws. Clean luminaire and lens using only solvent-free cleansers. Replace trim and lens. Tighten screws.		Please refer to the appropriate accessory installation sheet for further instruction when applicable.		Description	Part No
Lamp: 48.2W LED Module		180° Glare Shield Elliptical Spread Lens	70 758 70 065	Lens	140853
				Lens Gasket	831281
				Driver (120-277V) LED Module 3000K LED Module 4000K	76001-02 LED-0441/930 LED-0441/940

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

ATTENTION - RISQUE D'INCENDIE. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.
