


Tools Required:

- Medium Phillips head screwdriver
- T20 torx head screwdriver

Overview:

LED Watts: 28.1 W
 System Watts: 33 W
 Controllability: 0-10 V dimmable
 Weight: 9.7 lbs.
 Protection Class: IP65



Dimensions

A: 15 3/8"
 B: 4 1/8"
 C: 11 3/4"



Notice to Installer for 24 044:

1. BEGA luminaires may be damaged if connected to conduit systems containing water. Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends."
2. Mounts to the ceiling or wall directly to/over a standard 4" octagonal wiring box (by others) using KIT #96 (included); see Figure 1.
3. In conformance with U.L. Standards 1598, a silicone-based sealant **MUST** be used between the mounting plate edge and supporting surface.

WARNING: LEDs are high-quality electronic components! Please avoid touching the light output opening of the LED directly during installation.

Installation: 24 044

1. Attach KIT #96 to the recessed junction box using two #8-32 X 3/8" Phillips screws.
2. Make supply wiring and luminaire wiring connections inside the recessed junction box:
 - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
 - DIMMING CONTROL WIRE (+) TO POSITIVE PURPLE DRIVER DIM CONTROL WIRE
 - DIMMING CONTROL WIRE (-) TO NEGATIVE GRAY DRIVER DIM CONTROL WIRE
3. Turn the glass counter-clockwise to release it from the luminaire base.
4. Attach the luminaire base to KIT #96 using the two M4 X 25MM torx screws and silicone washers. For exterior installations, apply a small bead of silicone around the luminaire base.
5. To attach the glass back on the luminaire base, ensure that the gasket is correctly positioned and align the yellow arrow markers with each other before turning the glass clockwise into the base.

Figure 1:


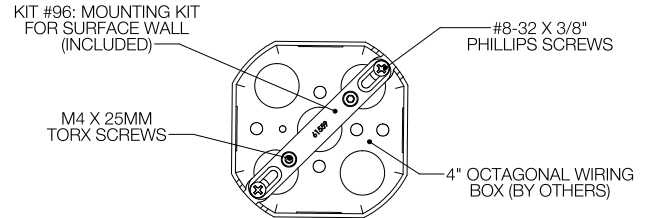


Figure 2:

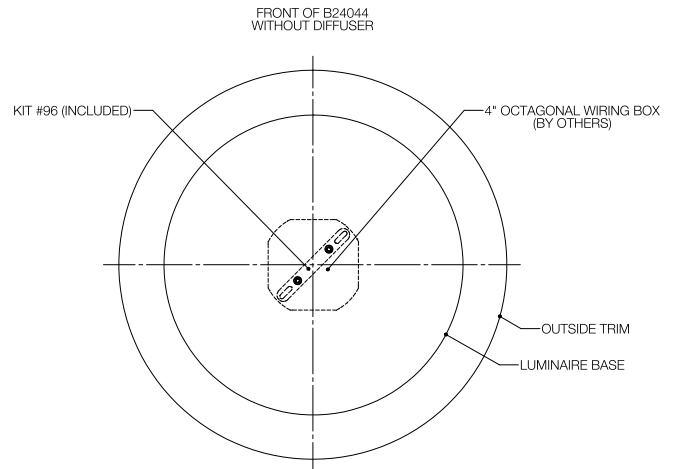

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.