



Tools Required:

4mm hex key



Dimensions

- A:** 13-3/4 "
- B:** 23 "
- C:** 23-5/8 "

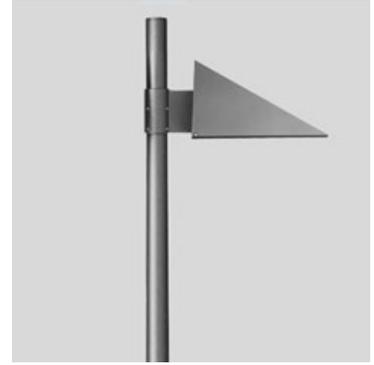

Protection Class: IP66

Weight: 29.0 lbs.

Notice to Installer for 77 930:

1. See page 2 for specific product safety warnings.
2. For pole top applications only.
3. Slip fits 3" O.D. poles only.
4. LED module provided inside luminaire head.

77 930 - installation:

1. Feed luminaire wires through slip fitter and make luminaire wiring connections to supply wires:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
 Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
2. Mount luminaire onto pole. Tighten (8) 4mm hex set screws evenly to secure.
3. Obtain separately-packed pole-top extension and screw on top of luminaire slip fitter. Tighten to stop. Do NOT overtighten.

Fig 1



Unclip the latches from the top of each latch

Fig 2



Lens cover frame will swing down after latches unclip

Relamping/Maintenance

NO relamping necessary. To clean, unclip latches and open lens cover frame (Fig 1 and 2). Clean luminaire and lens using only solvent-free cleansers. Replace lens cover frame, making sure the gasket is seated properly. Secure (2) clips.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Faceplate	FP7929
Reflector	760937
Gasket	830906
Driver (120-277V) (2x)	75593
LED module (3000K) (2x)	LED-0403/830
LED module (4000K) (2x)	LED-0403/840

Lamp: 23.6W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
