


**Tools Required:**

- 2.5mm hex key
- Phillips head screw driver medium



**Dimensions**

- A:** 3-1/2"
- B:** 4"
- C:** 2-1/8"



**Weight:** 1.3 lbs.

**Notice to Installer for 78 047:**

1. See page 2 for specific product safety warnings.
2. Select the desired trim ring or housing material finish by using appropriate code number as suffix.
  - Code number .1 - White
  - Code number .2 - Stainless steel
  - Code number .3 - Chrome
3. Mounts directly to recessed BEGA 19538 small opening wiring box (provided).
4. See installation sheet 99068 for detailed instructions on 19538 small wiring box installation. **NOTE:** Mounting strap not used for this model - luminaire base mounts directly to 19538 small opening wiring box.


**NOTE:** Be sure to install 19538 small wiring box with mounting holes oriented in the horizontal position.

**WARNING:** LEDs are high quality electrical components. Please avoid touching them directly during installation.

**78 047 - installation:**


1. Loosen 2.5mm set screw on top of luminaire and remove the outer housing.
2. Route LED wiring into small opening wiring box for connections to be made.
3. Make supply wiring and LED connections in small opening wiring box:  
 NEGATIVE SUPPLY WIRE TO BLACK LED LUMINAIRE WIRE  
 POSITIVE SUPPLY WIRE TO RED LED LUMINAIRE WIRE
4. Attach luminaire base directly to 19538 small opening wiring box by using (2) 1/2" 8-32 screws (provided).
5. Replace the luminaire outer housing and secure by tightening set screw.

**Figure 1**

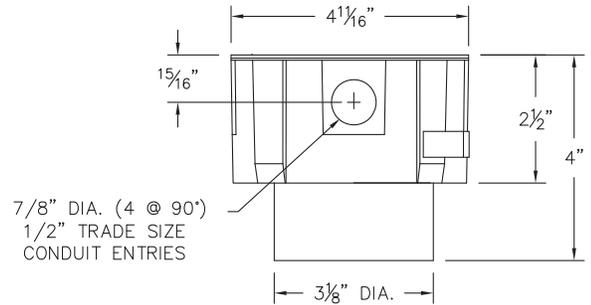

**SMALL OPENING WIRING BOX DETAIL**

**Figure 2**

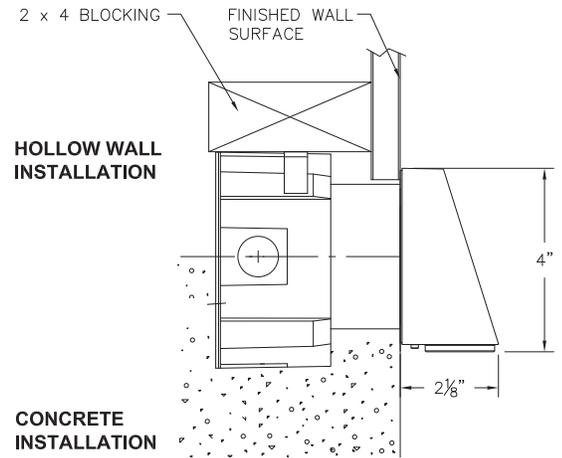

**Relamping/Maintenance**

Loosen set screw on top of luminaire housing. Clean glass and luminaire using only solvent-free cleansers. Replace luminaire housing and tighten set screw.

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Replacement Parts**

Description	Part No
LED driver (120-277V)	75911
LED module (3000K)	LED-0234/930
LED module (4000K)	LED-0234/940

Small-opening wiring box

19538

**Lamp:** 3.3W LED Module

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.**

**LES FILS D'ALIMENTATION 90°C MIN.**