

Tools Required:

2.5mm hex key
Phillips head screw driver medium



Dimensions

A: 6-7/8 "
B: 4 "
C: 2-1/8 "



Weight: 1.5 lbs.

Notice to Installer for 78 052:

- See page 2 for specific product safety warnings.
- Select the desired trim ring or housing material finish by using appropriate code number as suffix.
Code number .1 - White
Code number .2 - Stainless steel
Code number .3 - Chrome
- For attachment to wall over standard single-gang wiring box (by others).
- Wiring box needs to be recessed into wall and must be flush with the finished surface.

WARNING: LEDs are high quality electrical components. Please avoid touching them directly during installation.

78 052 - installation:


- Loosen 2.5mm set screw on top of luminaire and remove the outer housing.
- Route LED wiring into wiring box for connections to be made.
- Make supply wiring and LED connections in wiring box:
NEGATIVE SUPPLY WIRE TO BLACK LED LUMINAIRE WIRE
POSITIVE SUPPLY WIRE TO RED LED LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

- Attach and secure luminaire backing to wall using hardware by others (minimum screw size 8-32 screws).
- Replace the luminaire outer housing and secure by tightening set screw.

Figure 1

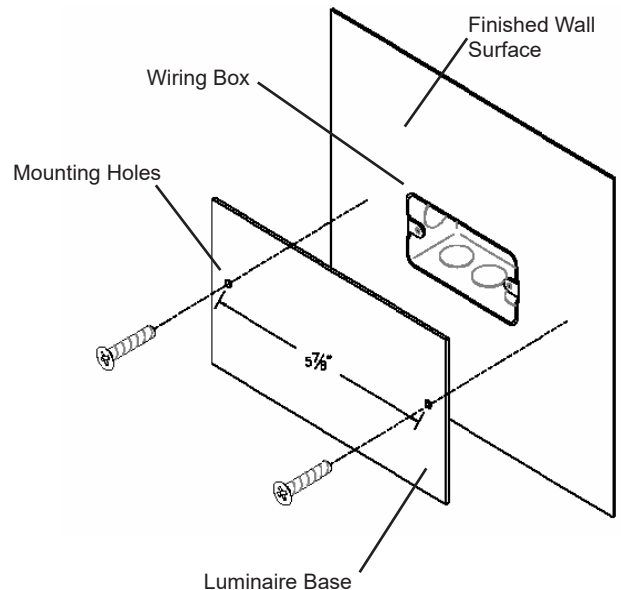

Relamping/Maintenance

Loosen set screw on top of luminaire housing. Clean glass and luminaire using only solvent-free cleansers. Replace luminaire housing and tighten set screw.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED driver (120-277V)	76023
LED module (3000K) (2x)	LED-0234/930
LED module (4000K) (2x)	LED-0234/940

LED: 8.0 W

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR DAMP LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS HUMIDES.

LES FILS D'ALIMENTATION 90°C MIN.
