


**Tools Required:**

- 3mm hex head screwdriver

**Overview:**

LED Watts: 20.2W  
 System Watts: 26W  
 Controllability: 0-10V dimmable  
 Weight: 5.7 lbs.  
 Protection Class: IP67



**Dimensions**

A: 8"  
 B: 5-1/2"




**Notice to Installer:**

1. See page 2 for specific product safety warnings.
2. For ground mount applications only.
3. A wiring box suitable for outdoor locations is required for installation. Luminaire mounts directly to recessed ground installed wiring box. Adequate foundation required. Wiring box must be flush with the finished surface. Wiring box not included.
4. Luminaire is rotatable 360° on mounting plate independent of wiring box orientation.
5. Proper drainage must be provided.
6. Re-enterable potting compound may be used in wiring box in installations where water entry is a concern. Consult factory for details.

**84 757 Luminaire Installation:**

1. Establish location of wiring box (by others) directly below proposed location of luminaire. Provide adequate drainage and foundation for wiring box. Top of wiring box must be flush with finished surface.
2. Loosen (1) 3mm hex head set screw near base of luminaire to separate mounting plate from luminaire housing.
3. Route cable from luminaire through mounting plate into wiring box. Note: luminaire is provided with 10' cable. Trim excess cable. Do not remove potted water stopper.
4. Make supply wiring connections in wiring box using waterproof connectors (included):  
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE  
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE  
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE  
 0-10V dimming (if applicable):  
 DIM CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE  
 DIM CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE
5. Attach mounting plate to wiring box using hardware by others.
6. Slip luminaire over mounting plate and aim luminaire to desired orientation.
7. Secure luminaire housing to mounting plate by tightening 3mm hex head set screw.

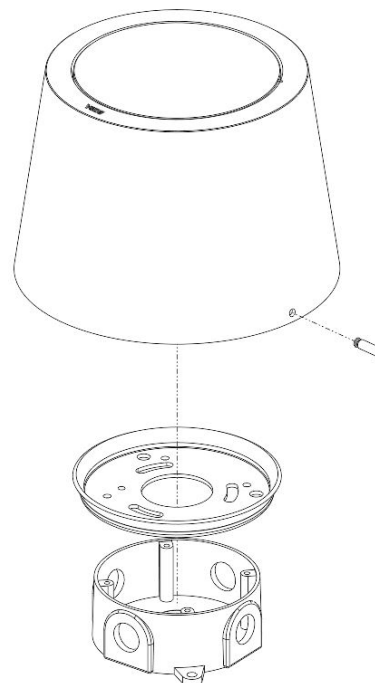

**Accessories**

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

**Maintenance:**

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

**Replacement Parts**

See label inside of fixture for LED replacement part number.

Consult factory for all other replacement components.

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**  
**SUITABLE FOR WET LOCATIONS.**  
**SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND**  
**MIN 60°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.**  
**CONVIENT AUX EMPLACEMENTS MOUILLÉS.**  
**PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL**  
**LES FILS D'ALIMENTATION 60°C MIN.**