

Tools Required:

- 5mm hex key
- 10mm hex key
- Adjustable wrench

Protection Class: IP 65

Weight: 95.0 lbs



Dimensions

- A:** 7 "
- B:** 63 "
- C:** 197 "





Notice to Installer for 84 992:

1. For pole top applications only. **6" O.D. straight, round, aluminum pole with 4 bolt fixed base is provided by BEGA.**
2. 52" of free space is required above the luminaire for relamping and changing out the diffuser.
3. Design calculations require consideration of the field conditions such as (but not limited to) wind zone, height and appendages. Consideration must be given by the designer and/or specifier to assure adequacy of design for the application.

84 992 - Installation:

1. Install anchorage and conduit as shown in the figure. Complete anchorage assembly can be inserted into concrete after concrete pour and leveling. **IMPORTANT:** concrete must be vibrated or tamped to ensure concrete fully surrounds the female couplings.
 2. Level and grout pole base.
 3. Use caution when settling anchor bolts. Bolts must be vertical and centered on dimensions shown.
 4. Route luminaire wiring conduit to the pole base.
 5. Place luminaire on top of the pole. Tighten (4) 4mm set screws to secure luminaire on pole.
 6. Make supply wiring and luminaire wiring connections inside pole base:
 MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
 NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
 GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- Dimming (if applicable):
 DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
 DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

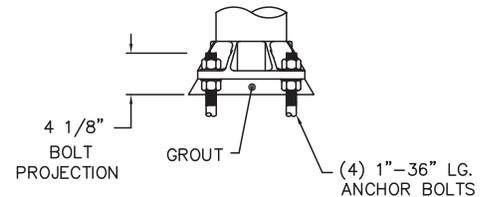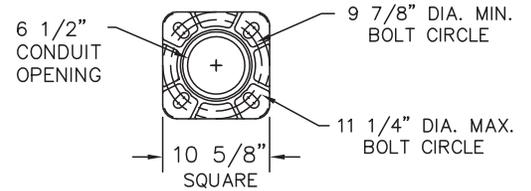

BASE DETAIL

STANDARD (4) 1" X 36"
 ANCHOR BOLTS & MTG. TEMPLATE
 SUPPLIED WITH POLE
 OR IN ADVANCE.

Relamping/Maintenance

No relamping required.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
LED (x12) (3000K)	LED-0701/830
LED (x12) (4000K)	LED-0701/840
Lens Gasket (lower)	831074
Lens Gasket (upper)	830972
Lens	150319.6
Driver (x2) (120V-277V)	75985-06

Lamp: 61.2W LED

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.