

Tools Required:

- 3mm hex key
- Philips head screwdriver

Overview:

LED Watts: 36.8W
System Watts: 42.0W
Controllability: 0-10V dimmable to 1%
Weight: 7.5 lbs.
Protection Class: IP65

Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Mounts directly to finished surface over a standard recessed 4" octagonal wiring box (by others)
3. In conformance with UL Standard 1598, a silicone sealant must be used between luminaire and mounting surface.

WARNING: LEDs are high quality electrical components. Please avoid touching them directly during installation.


Installation:

1. Remove two M6 set screws on back of housing using 3mm hex key.
2. Feed the luminaire wiring through the luminaire housing.
3. Make supply wiring and luminaire wiring connections inside the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE

Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO PURPLE POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE GREY DRIVER DIM CONTROL WIRE

4. Attach the housing directly to the surface over a 4" standard octagonal wiring box using sufficient hardware (by others) (Figure 1).
5. Re-attach housing and replace two M6 set screws.




Dimensions

A: 9-5/8"
B: 4-1/8"



Figure 1: Mounting hole locations

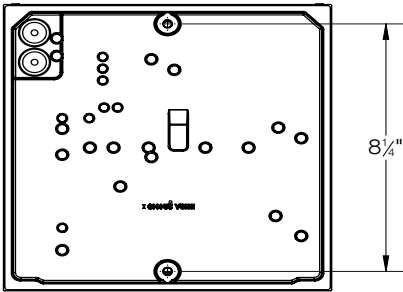

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS. MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.