

Application
Recessed wall luminaire with unshielded light distribution for the illumination of ground surfaces, building entrances, plazas, and footpaths.

Materials
Clear safety glass with white ceramic coating
Corrosion-resistant 304 grade stainless steel
Mechanically captive stainless steel fasteners
High temperature silicone gasket
Aluminum installation housing

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 67

Weight: 15.4 lbs.

Electrical
Operating voltage 120-277VAC
Minimum start temperature -30° C
LED module wattage 9.6W
System wattage 12.5W
Controllability 0-10V, TRIAC, and ELV dimmable
Color rendering index Ra > 80
Luminaire lumens 614 lm
LED service life (L70) 60000hrs

LED color temperature
4000K (K4)
3500K (K35)
3000K (K3)
2700K (K27)


BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish
#4 brushed stainless steel. Custom colors are not available.

Type:
BEGA Product:
Project:
Modified:

Available options
FSC Fusing

Included (available for pre-shipment)
BB24104 Installation housing

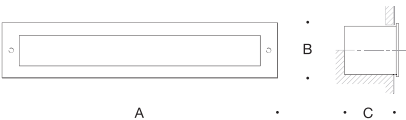

Recessed wall luminaire · Unshielded				
	LED	A	B	C
B24104	9.6W	25 ³ / ₈	5	5

