


BEGA

File: 24126K4_BEGA_IES.ies

TEST: BE_24126K4
TEST LAB: BEGA
DATE: 10/02/2018
LUMINAIRE: 24126K4
LAMP: 8.0W LED

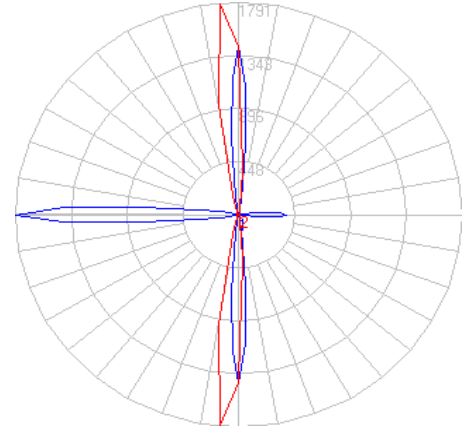


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	379
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	34
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	0.20 ft
Luminous Height	0.00 ft

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	21.8	N.A.	5.7
FM (30-60)	1.5	N.A.	0.4
FH (60-80)	3.1	N.A.	0.8
FVH(80-90)	19.6	N.A.	5.2
BL (0-30)	63.1	N.A.	16.6
BM (30-60)	7.0	N.A.	1.8
BH (60-80)	13.5	N.A.	3.6
BVH(80-90)	60.1	N.A.	15.8
UL (90-100)	79.7	N.A.	21.0
UH (100-180)	109.9	N.A.	29.0
Total	379.3	N.A.	100.0

BUG Rating B0-U3-G1

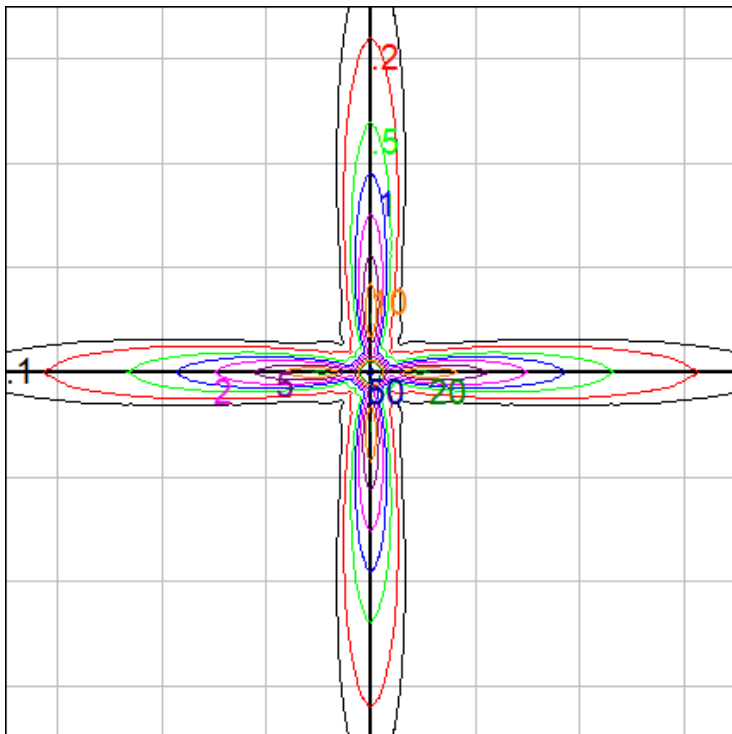

Grid Spacing: 5 ft.

Isofootcandle grid on wall

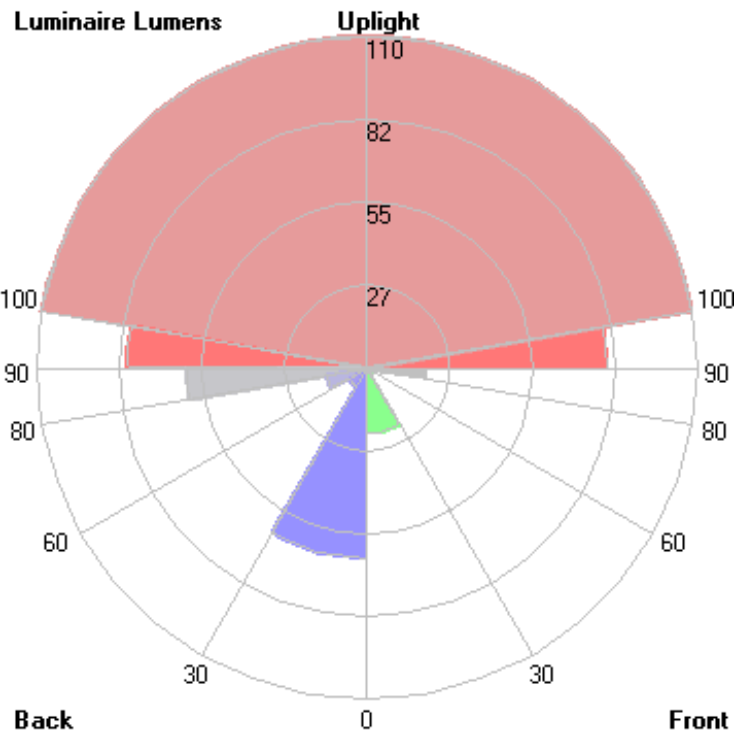

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2021

02/10/2021

BEGA

File: 24126K35_BEGA_IES.ies

TEST: BE_24126K4
TEST LAB: BEGA
DATE: 10/02/2018
LUMINAIRE: 24126K35
LAMP: 8.0W LED

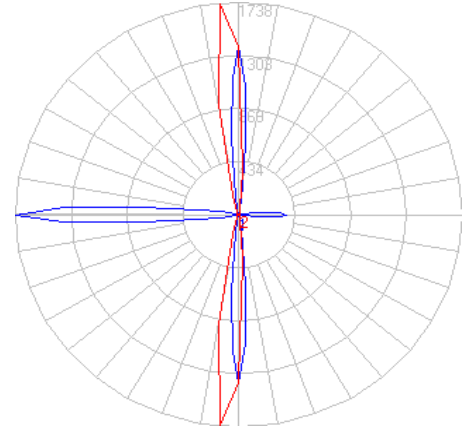


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	368
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	33
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	0.20 ft
Luminous Height	0.00 ft

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	21.1	N.A.	5.7
FM (30-60)	1.4	N.A.	0.4
FH (60-80)	3.0	N.A.	0.8
FVH(80-90)	19.0	N.A.	5.2
BL (0-30)	61.2	N.A.	16.7
BM (30-60)	6.8	N.A.	1.8
BH (60-80)	13.1	N.A.	3.6
BVH(80-90)	58.3	N.A.	15.9
UL (90-100)	77.3	N.A.	21.0
UH (100-180)	106.6	N.A.	29.0
Total	367.8	N.A.	100.0

BUG Rating B0-U3-G1

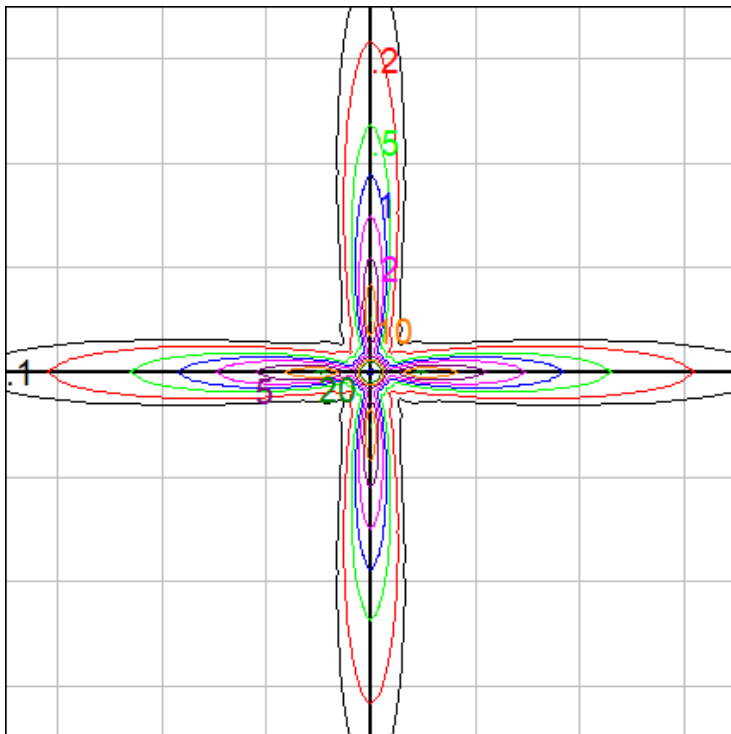

Grid Spacing: 5 ft.

Isofootcandle grid on wall

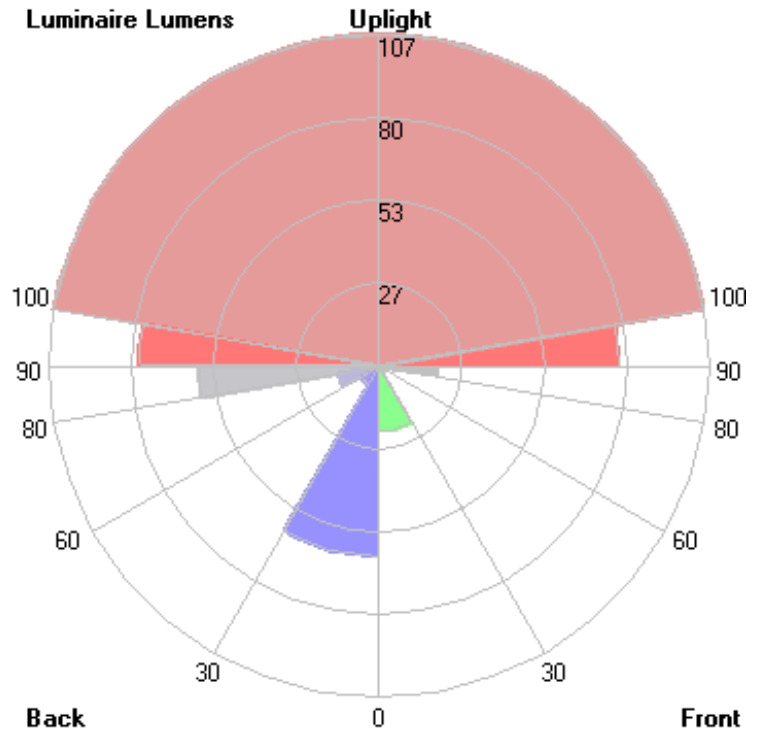

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2021

02/10/2021

BEGA

File: 24126K3_BEGA_IES.ies

TEST: BE_24126K4
TEST LAB: BEGA
DATE: 10/02/2018
LUMINAIRE: 24126K3
LAMP: 8.0W LED

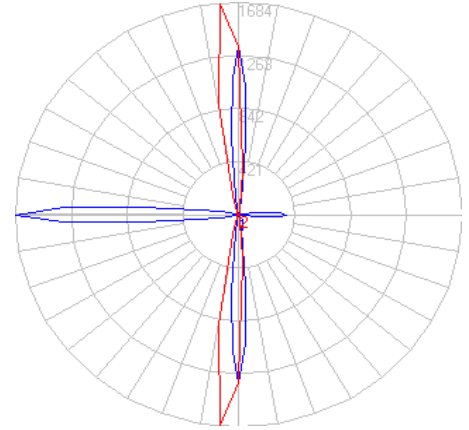


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	356
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	32
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	0.20 ft
Luminous Height	0.00 ft

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	20.5	N.A.	5.7
FM (30-60)	1.4	N.A.	0.4
FH (60-80)	2.9	N.A.	0.8
FVH(80-90)	18.4	N.A.	5.2
BL (0-30)	59.4	N.A.	16.6
BM (30-60)	6.5	N.A.	1.8
BH (60-80)	12.7	N.A.	3.6
BVH(80-90)	56.5	N.A.	15.9
UL (90-100)	74.9	N.A.	21.0
UH (100-180)	103.3	N.A.	29.0
Total	356.5	N.A.	100.0

BUG Rating B0-U3-G1 ?

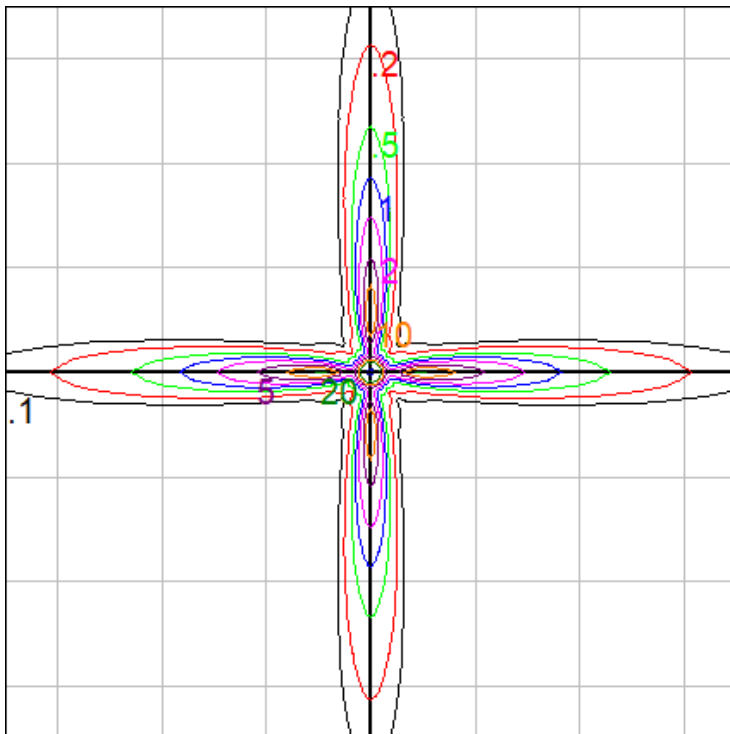

Grid Spacing: 5 ft.

Isofootcandle grid on wall

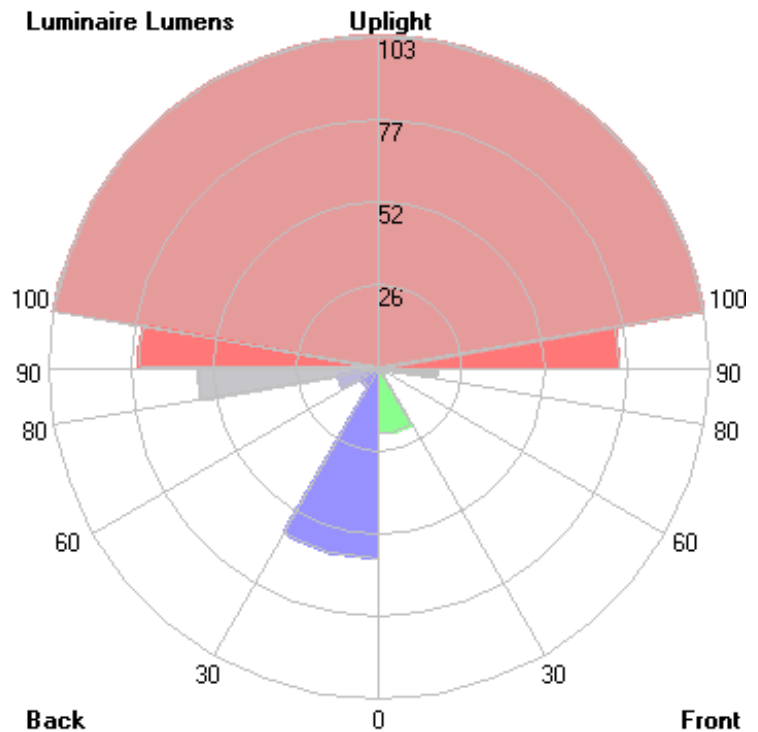

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2021

02/10/2021

BEGA

File: 24126K27_BEGA_IES.ies

TEST: BE_24126K4
TEST LAB: BEGA
DATE: 10/02/2018
LUMINAIRE: 24126K27
LAMP: 8.0W LED

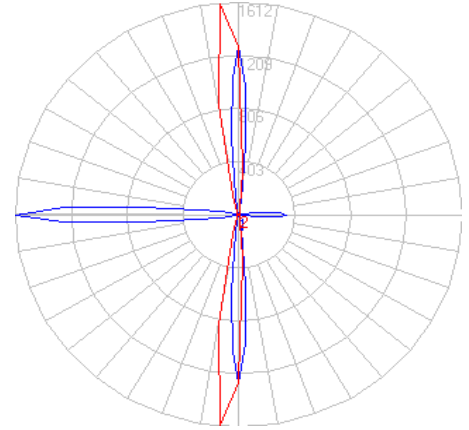


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	341
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	31
Total Luminaire Watts	11
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	0.20 ft
Luminous Height	0.00 ft

Lum. Classification System (LCS)


LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	19.6	N.A.	5.8
FM (30-60)	1.3	N.A.	0.4
FH (60-80)	2.8	N.A.	0.8
FVH(80-90)	17.6	N.A.	5.2
BL (0-30)	56.8	N.A.	16.7
BM (30-60)	6.3	N.A.	1.8
BH (60-80)	12.1	N.A.	3.6
BVH(80-90)	54.1	N.A.	15.9
UL (90-100)	71.7	N.A.	21.0
UH (100-180)	98.9	N.A.	29.0
Total	341.2	N.A.	100.0

BUG Rating **B0-U3-G1**

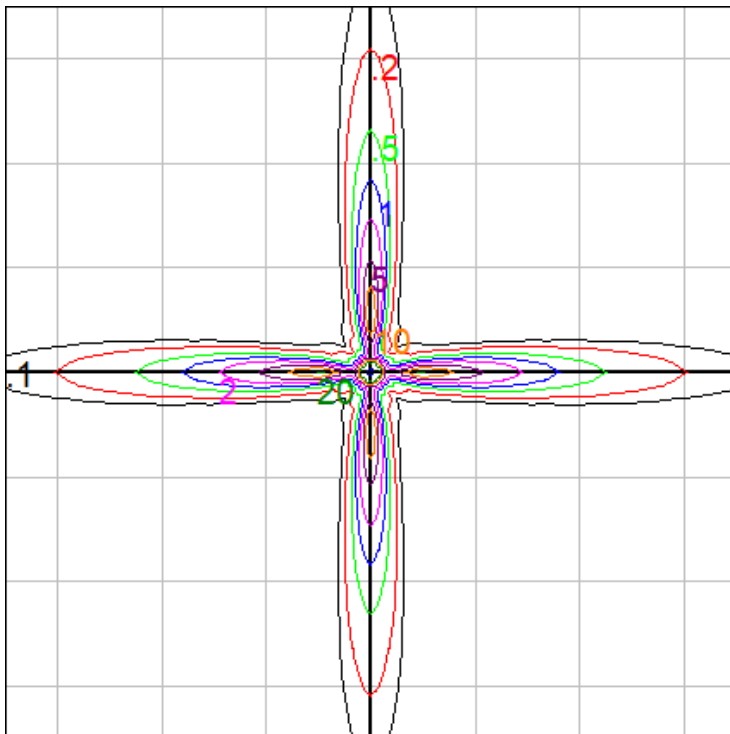

Grid Spacing: 5 ft.

Isofootcandle grid on wall

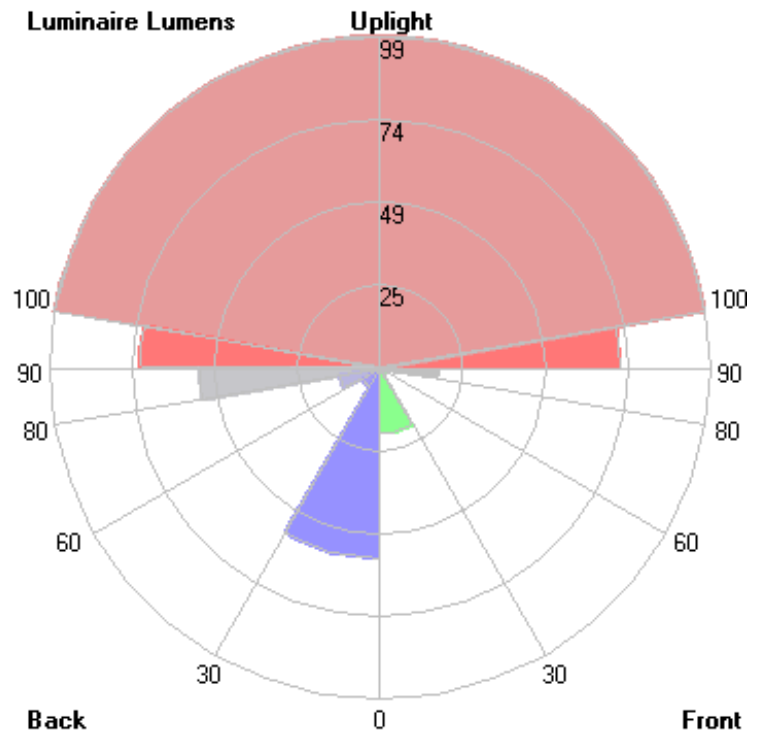

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.