

Application

Recessed wall luminaire with unshielded light for use as a location luminaire for way finding.

Materials

BEGA Tricoat ®, a 3-layer finishing technology for increased corrosion protection

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 5.1 lbs.

Electrical

Operating voltage	120-277V AC
Minimum start temperature	-30° C
LED module wattage	9.3W
System wattage	12.0W
Controllability	0-10V dimmable
Color rendering index	Ra > 80
Luminaire lumens	853lm
LED service life (L70)	60000 hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK)	Bronze (BRZ)
Silver (SLV)	White (WHT)
Natural Bronze (NTB)	RAL:
CUS:	

Type:

BEGA Product:

Project:



Modified:

Available options

CUS	Custom finish
MGU	Marine grade undercoat
NTB	Natural bronze (premium finish)
RAL	RAL finish

Included (available for pre-shipment)

BB24217	Installation housing
---------	----------------------

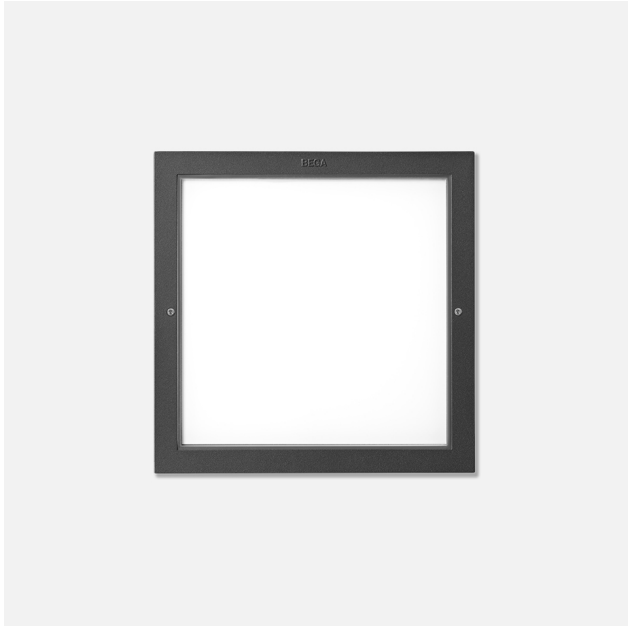

Recessed wall luminaire · Unshielded · location

	LED	A	B	C
B24200	ADA 9.3W	9 ⁷ / ₈	9 ⁷ / ₈	5 ¹ / ₄

BEGA 1000 BEGA Way, Carpinteria, CA 93013 (805)684-0533 info@bega-us.com