

Application

Recessed wall luminaire with directed light distribution for the illumination of ground surfaces, stairs and pathways.

Materials

Clear safety glass with optical texture  
BEGA Tricoat ®, a 3-layer finishing technology for increased corrosion protection  
Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy  
Stainless steel screw clamps  
Mechanically captive stainless steel fasteners  
Stainless steel helicoils  
High temperature silicone gasket  
Silicone applied robotically to casting, plasma treated for increased adhesion  
Composite installation housing

NRTL listed to North American Standards, suitable for wet locations  
Protection class IP 65

Weight: 2.2 lbs.

Electrical

Operating voltage 120-277VAC  
Minimum start temperature -40° C  
LED module wattage 2.9W  
System wattage 5.0W  
Controllability 0-10V dimmable  
Color rendering index Ra > 80  
Luminaire lumens 410lm  
LED service life (L70) 60000hrs

LED color temperature

4000K (K4)  
3500K (K35)  
3000K (K3)  
2700K (K27)

BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK) Bronze (BRZ)  
Silver (SLV) White (WHT)  
Natural Bronze (NTB) RAL:  
CUS:

Type:

BEGA Product:

Project:



Modified:

Available options

CUS Custom finish  
MGU Marine grade undercoat  
NTB Natural bronze (premium finish)  
RAL RAL finish

Included (available for pre-shipment)

BB24215 Installation housing

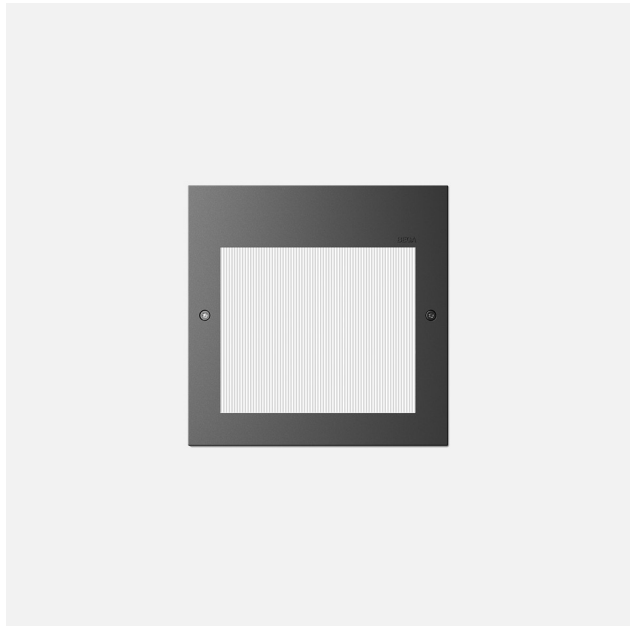

Recessed wall luminaire · Directed light					
		LED	A	B	C
B24206	ADA	2.9W	5 <sup>7</sup> / <sub>8</sub>	5 <sup>7</sup> / <sub>8</sub>	5 <sup>1</sup> / <sub>4</sub>