


BEGA

Photometric Filename: 24222.IES

TEST: BE_24222
TEST LAB: BEGA
DATE: 12/14/2016
LUMINAIRE: 24 222
LAMP: 20.2W LED

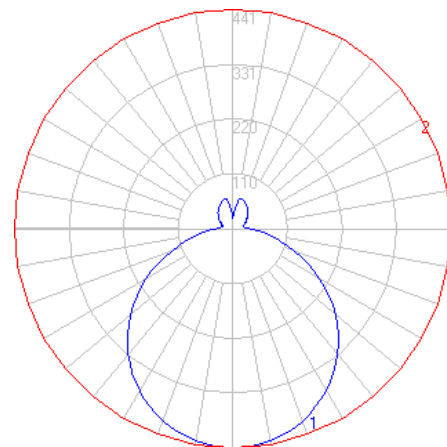


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1559
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	65
Total Luminaire Watts	24
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.00 ft
Luminous Width (90-270)	1.26 ft (Diameter)
Luminous Height	0.25 ft

Zonal Lumen Summary

Zone	Lumens
0-10	41.71
10-20	119.69
20-30	182.19
30-40	221.27
40-50	231.60
50-60	211.82
60-70	165.86
70-80	107.00
80-90	56.55
90-100	28.70
100-110	22.60
110-120	26.71
120-130	30.81
130-140	32.89
140-150	31.80
150-160	26.76
160-170	17.34
170-180	4.17

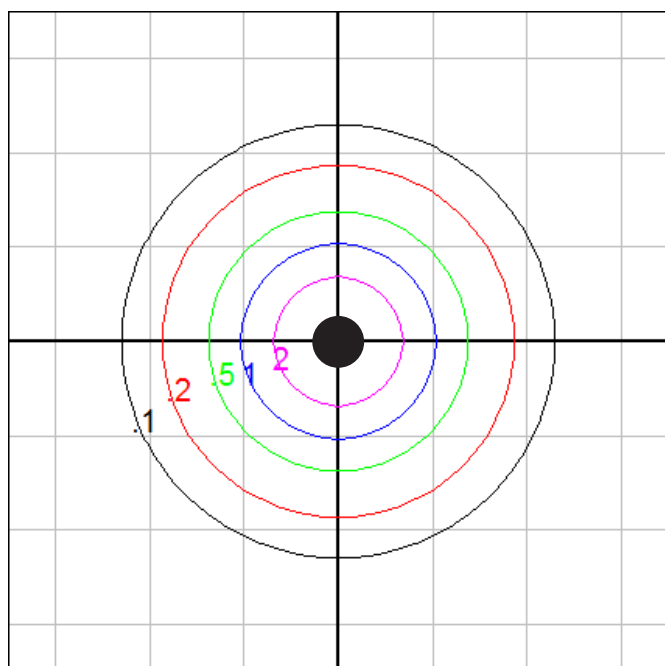

Ceiling Mount - Isofootcandle Grid on Floor
Mounting Height = 10 ft. Grid Spacing = 10 ft.

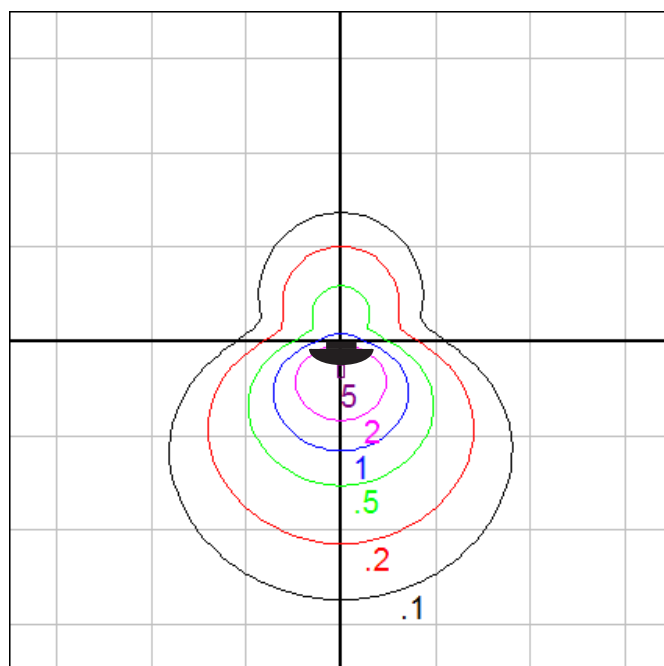

Wall Mount - Isofootcandle Grid on Floor
Mounting Height = 5 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

5/15/2018