


BEGA

File: 24261K4_BEGA_IES.ies

TEST: BE_24261K4
TEST LAB: BEGA
DATE: 6/25/2019
LUMINAIRE: 24 261K4
LAMP: 11.5W LED

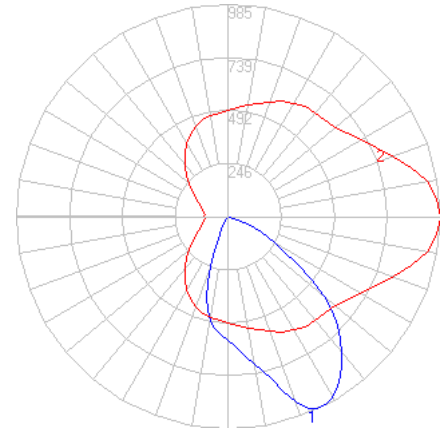


Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	984.744
Maximum Candela Angle	0 H 25.5 V
Horizontal Beam Angle (50%)	54.4
Vertical Beam Angle (50%)	61.6
Horizontal Field Angle (10%)	89.5
Vertical Field Angle (10%)	95.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	592
Beam Efficiency	N.A.
Field Lumens	907
Field Efficiency	N.A.
Spill Lumens	47
Luminaire Lumens	954
Total Efficiency	N.A.
Total Luminaire Watts	14
Ballast Factor	1.00

Zonal Lumen Summary


Zone	Lumens
0-10	55.94
10-20	163.41
20-30	222.92
30-40	220.26
40-50	170.88
50-60	84.24
60-70	29.58
70-80	2.49
80-90	0.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

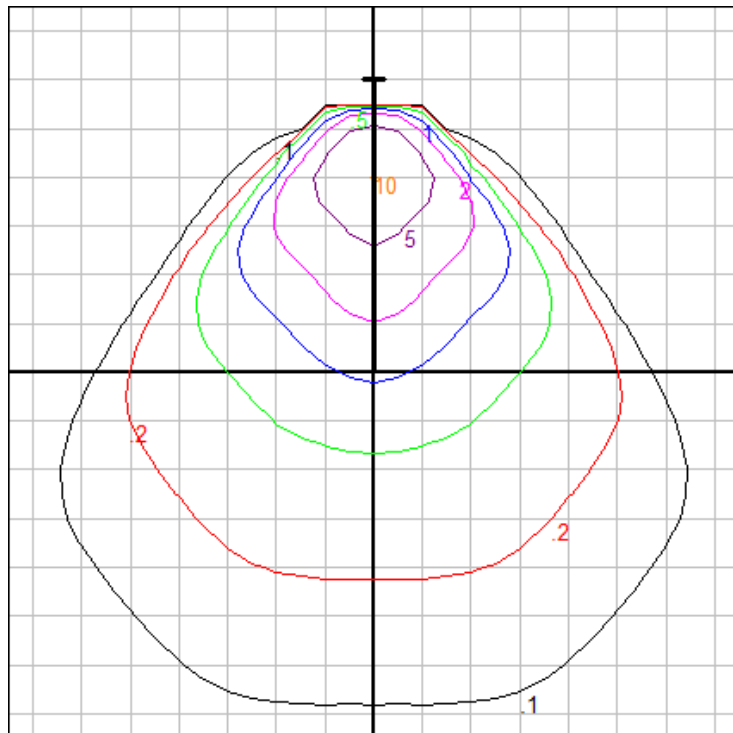

Isofootcandle grid on wall

Setback: 5 ft.

Grid Spacing: 2.5 ft.

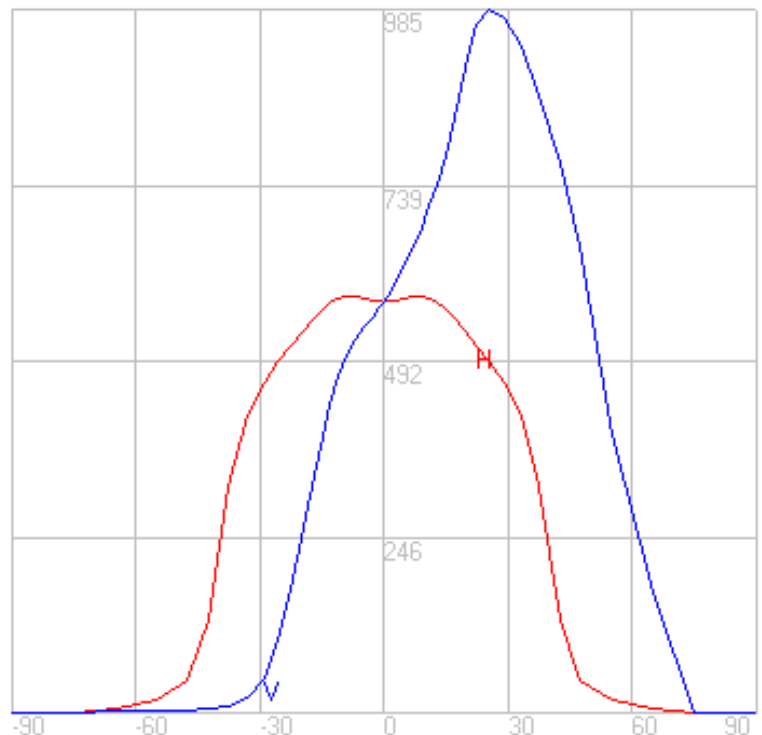

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

8/8/2023

BEGA

File: 24261K35_BEGA_IES.ies

TEST: BE_24261K4
TEST LAB: BEGA
DATE: 6/25/2019
LUMINAIRE: 24 261K35
LAMP: 11.5W LED

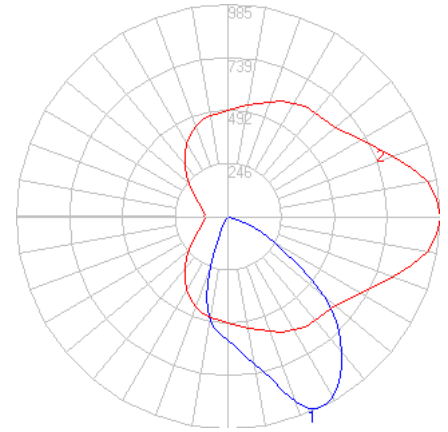


Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	984.744
Maximum Candela Angle	0 H 25.5 V
Horizontal Beam Angle (50%)	54.4
Vertical Beam Angle (50%)	61.6
Horizontal Field Angle (10%)	89.5
Vertical Field Angle (10%)	95.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	592
Beam Efficiency	N.A.
Field Lumens	907
Field Efficiency	N.A.
Spill Lumens	47
Luminaire Lumens	954
Total Efficiency	N.A.
Total Luminaire Watts	14
Ballast Factor	1.00

Zonal Lumen Summary


Zone	Lumens
0-10	55.94
10-20	163.41
20-30	222.92
30-40	220.26
40-50	170.88
50-60	84.24
60-70	29.58
70-80	2.49
80-90	0.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

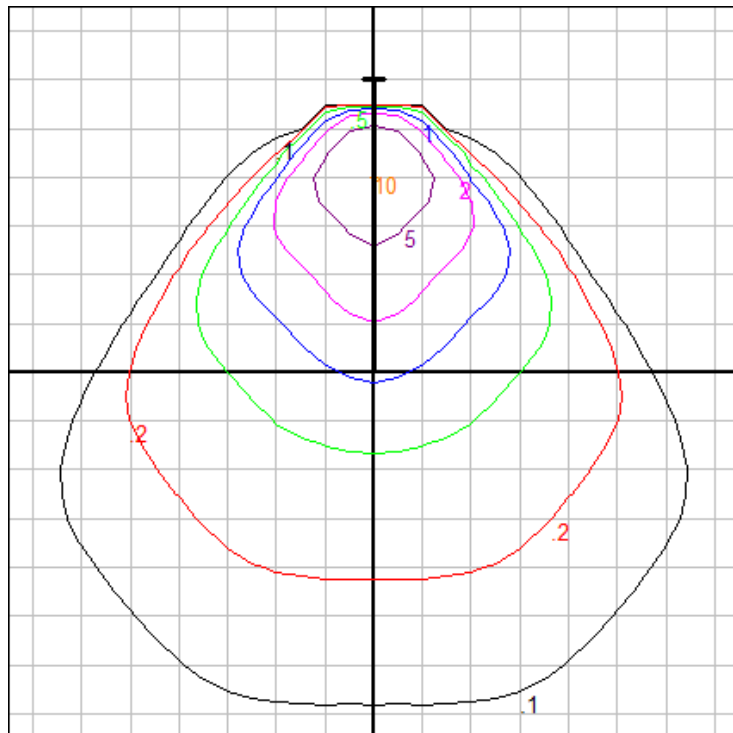

Isofootcandle grid on wall

Setback: 5 ft.

Grid Spacing: 2.5 ft.

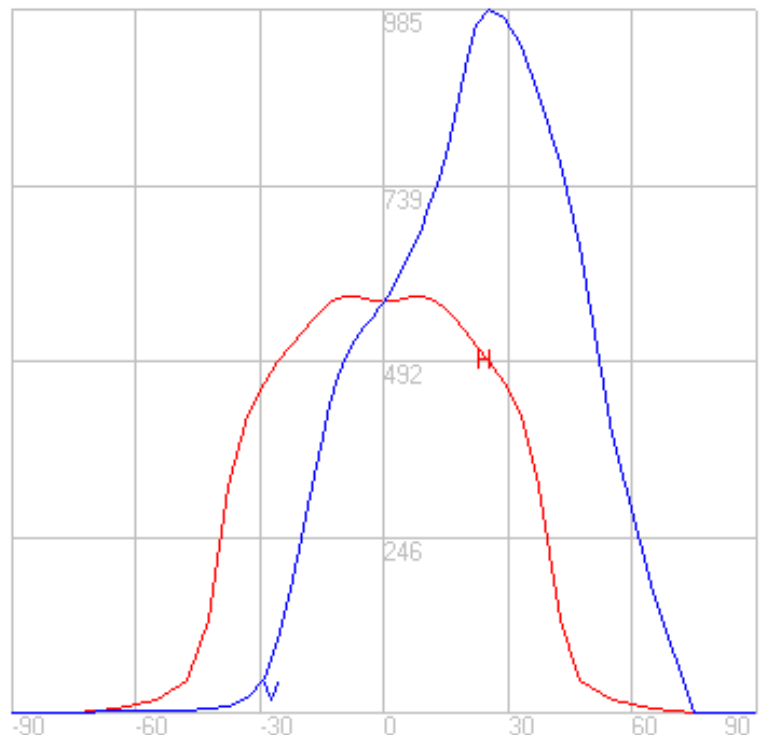

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

8/8/2023

BEGA

File: 24261K3_BEGA_IES.ies

TEST: BE_24261K4
 TEST LAB: BEGA
 DATE: 6/25/2019
 LUMINAIRE: 24 261K3
 LAMP: 11.5W LED

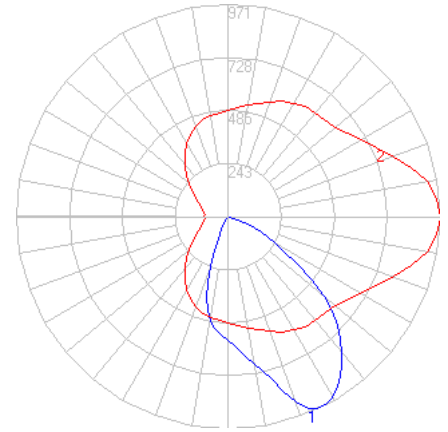


Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	970.776
Maximum Candela Angle	0 H 25.5 V
Horizontal Beam Angle (50%)	54.4
Vertical Beam Angle (50%)	61.6
Horizontal Field Angle (10%)	89.5
Vertical Field Angle (10%)	95.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	584
Beam Efficiency	N.A.
Field Lumens	894
Field Efficiency	N.A.
Spill Lumens	46
Luminaire Lumens	940
Total Efficiency	N.A.
Total Luminaire Watts	14
Ballast Factor	1.00

Zonal Lumen Summary


Zone	Lumens
0-10	55.15
10-20	161.09
20-30	219.75
30-40	217.13
40-50	168.46
50-60	83.05
60-70	29.16
70-80	2.46
80-90	0.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

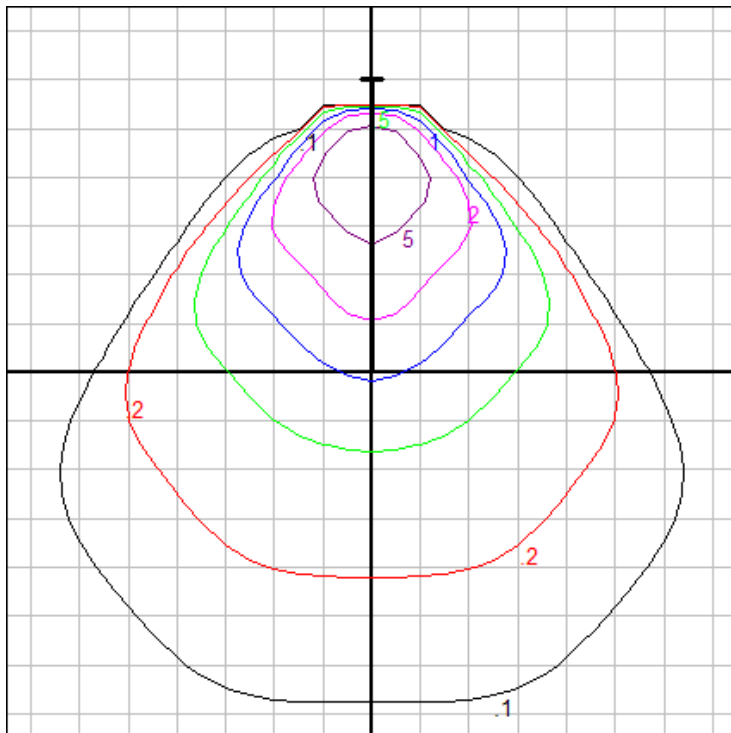

Isofootcandle grid on wall

Setback: 5 ft.

Grid Spacing: 2.5 ft.

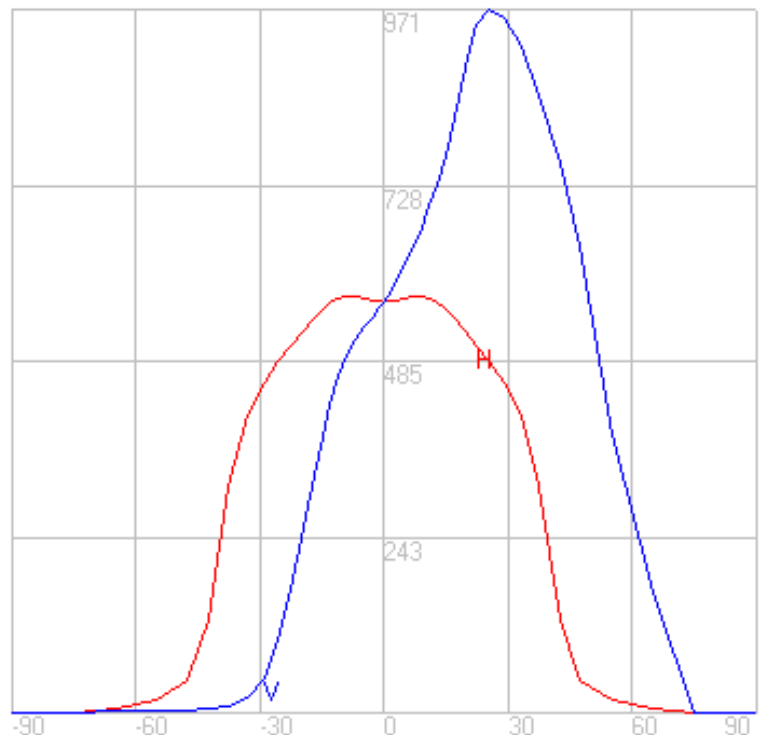

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

8/8/2023

BEGA

File: 24261K27_BEGA_IES.ies

TEST: BE_24261K4
TEST LAB: BEGA
DATE: 6/25/2019
LUMINAIRE: 24 261K27
LAMP: 11.5W LED

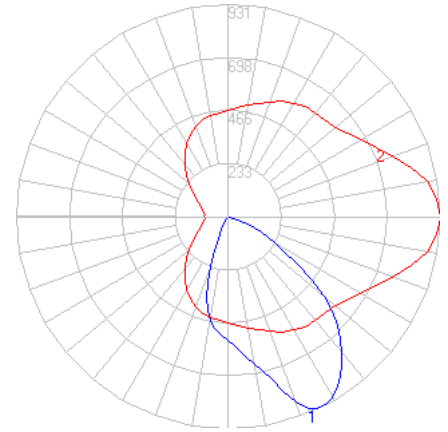


Characteristics

NEMA Type	5 H x 5 V
Maximum Candela	931.2
Maximum Candela Angle	0 H 25.5 V
Horizontal Beam Angle (50%)	54.4
Vertical Beam Angle (50%)	61.6
Horizontal Field Angle (10%)	89.5
Vertical Field Angle (10%)	95.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	560
Beam Efficiency	N.A.
Field Lumens	858
Field Efficiency	N.A.
Spill Lumens	44
Luminaire Lumens	902
Total Efficiency	N.A.
Total Luminaire Watts	14
Ballast Factor	1.00

Zonal Lumen Summary


Zone	Lumens
0-10	52.90
10-20	154.52
20-30	210.79
30-40	208.28
40-50	161.59
50-60	79.66
60-70	27.98
70-80	2.36
80-90	0.01
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

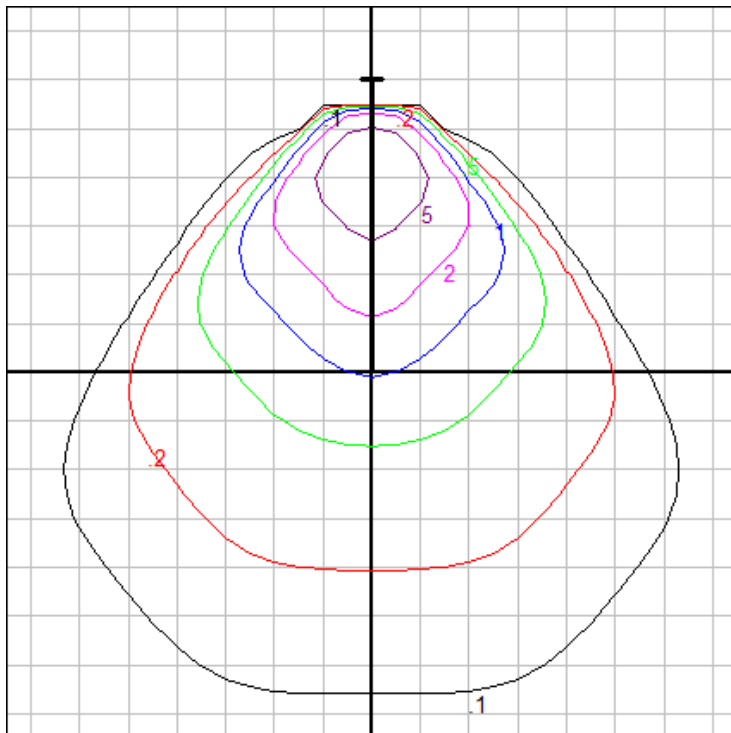

Isofootcandle grid on wall

Setback: 5 ft.

Grid Spacing: 2.5 ft.

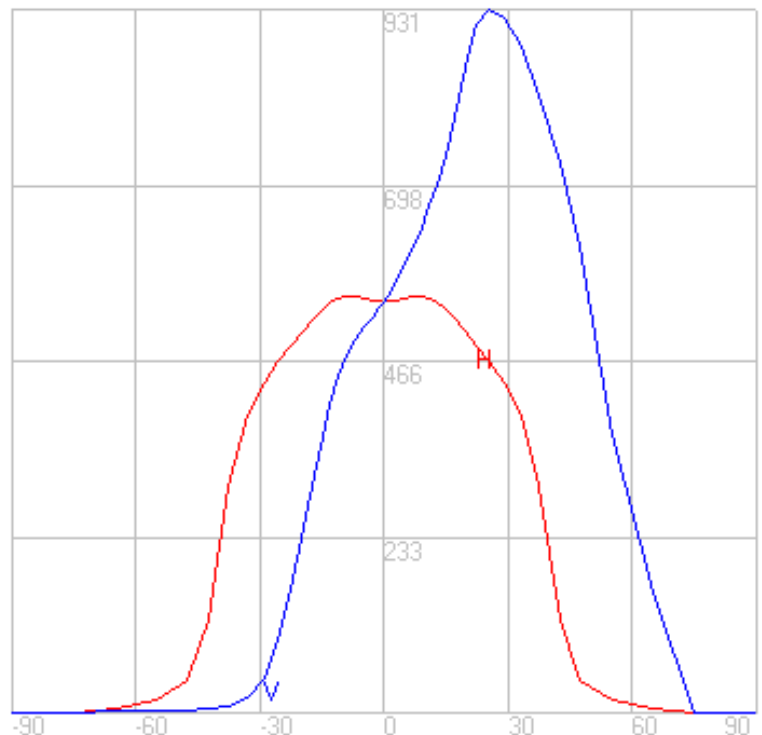

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2022

8/8/2023