
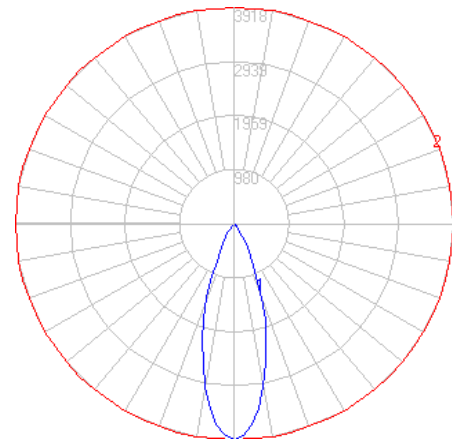


BEGA

Photometric Filename: 24300.ies

TEST: BE_24300
TEST LAB: BEGA
DATE: 5/8/2017
LUMINAIRE: 24 300
LAMP: 16W LED

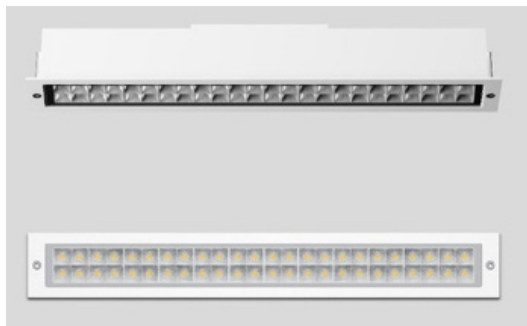


Characteristics


NEMA Type	4 H x 4 V
Maximum Candela	3918.1
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	34.8
Vertical Beam Angle (50%)	33.3
Horizontal Field Angle (10%)	63.3
Vertical Field Angle (10%)	60.8
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	791
Beam Efficiency	N.A.
Field Lumens	1382
Field Efficiency	N.A.
Spill Lumens	177
Luminaire Lumens	1559
Total Efficiency	N.A.
Total Luminaire Watts	19

Zonal Lumen Summary

Zone	Lumens
0-10	330.35
10-20	628.47
20-30	412.50
30-40	133.83
40-50	33.95
50-60	11.27
60-70	4.83
70-80	1.58
80-90	0.12
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

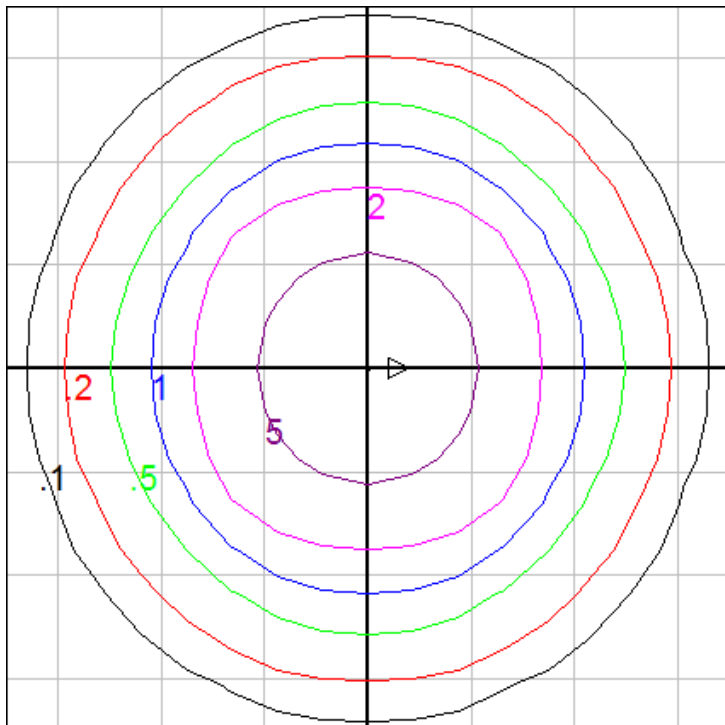

Mouting Height = 20 ft. Grid Spacing = 5 ft.

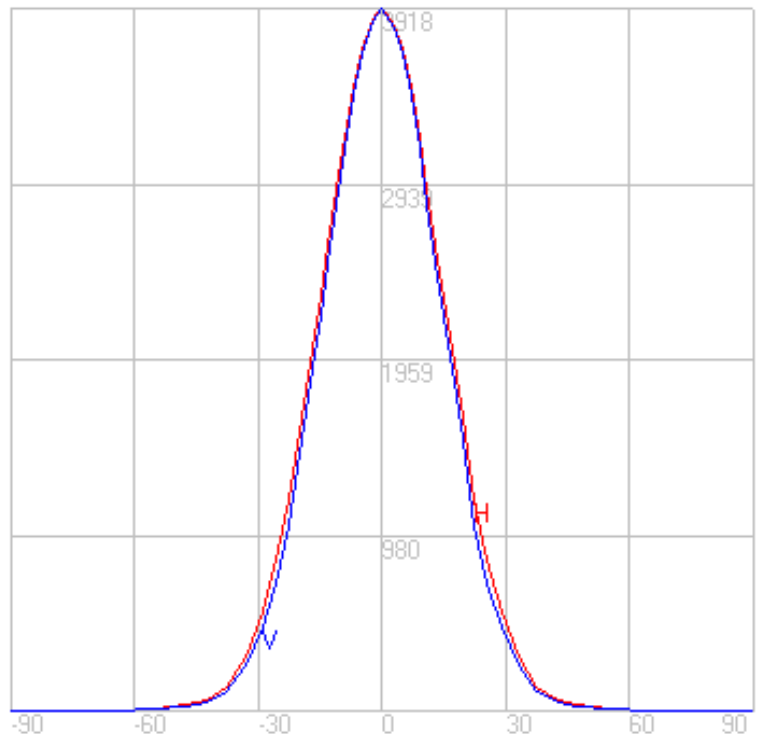

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/3/2018