
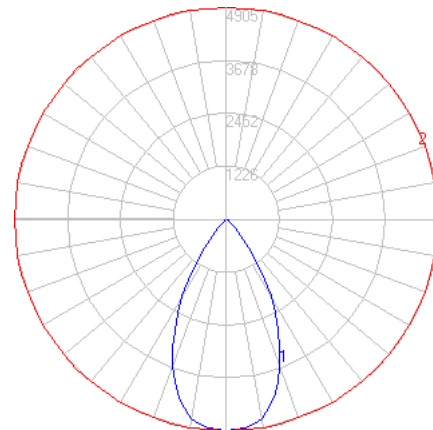


BEGA

Photometric Filename: 24304.ies

TEST: BE_24304
TEST LAB: BEGA
DATE: 4/12/2017
LUMINAIRE: 24 304
LAMP: 32W LED

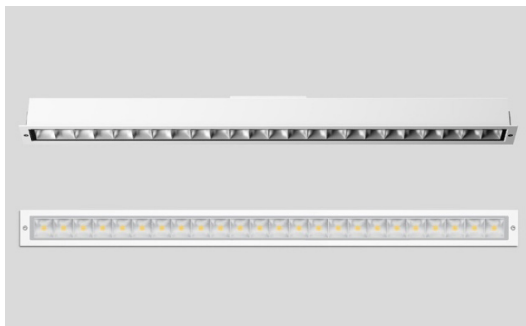


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	4904.5
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	55.0
Vertical Beam Angle (50%)	54.9
Horizontal Field Angle (10%)	82.7
Vertical Field Angle (10%)	81.2
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	2733
Beam Efficiency	N.A.
Field Lumens	4114
Field Efficiency	N.A.
Spill Lumens	209
Luminaire Lumens	4323
Total Efficiency	N.A.
Total Luminaire Watts	36

Zonal Lumen Summary

Zone	Lumens
0-10	459.20
10-20	1196.15
20-30	1335.01
30-40	926.38
40-50	305.56
50-60	60.05
60-70	20.73
70-80	7.41
80-90	0.67
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

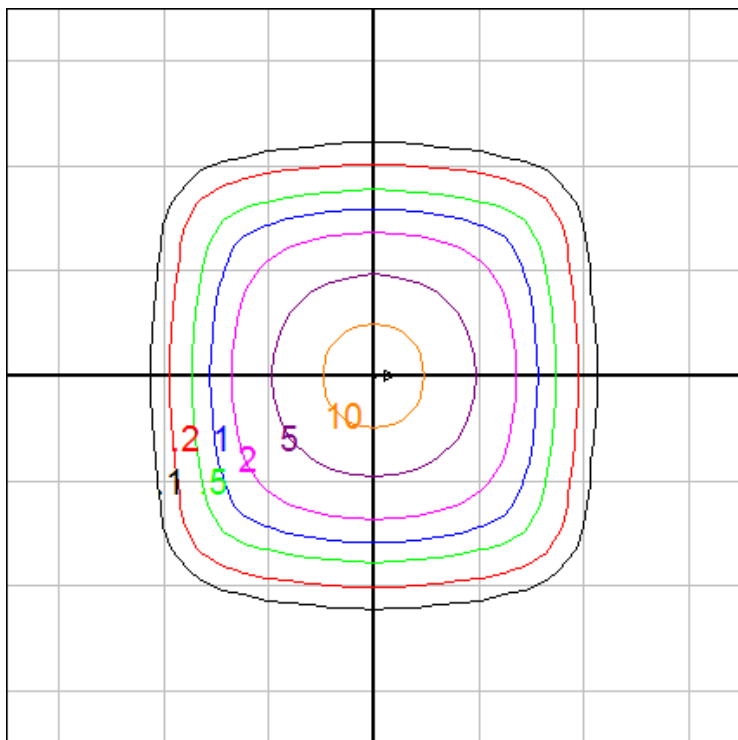

Mounting Height = 20 ft. Grid Spacing = 10 ft.

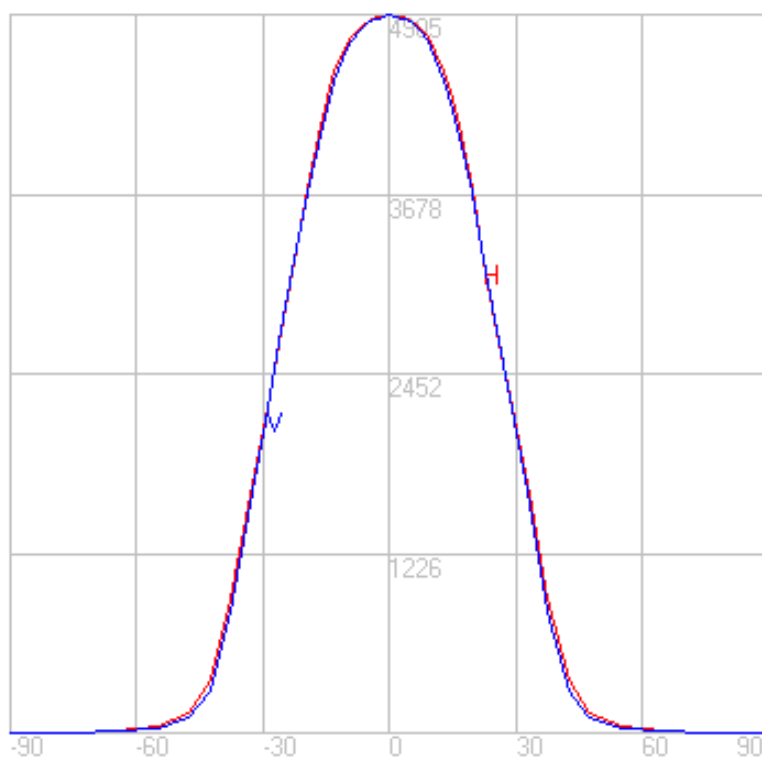

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/4/2018