
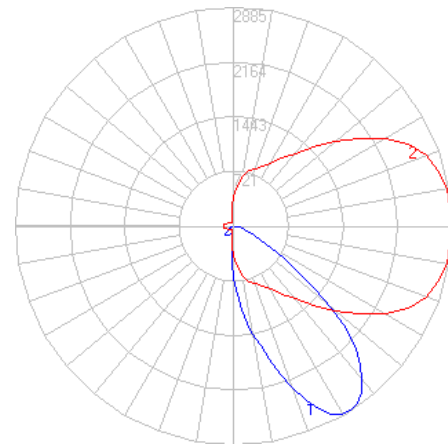


BEGA

Photometric Filename: 24306.ies

TEST: BE_24306
TEST LAB: BEGA
DATE: 4/24/2017
LUMINAIRE: 24 306
LAMP: 16W LED

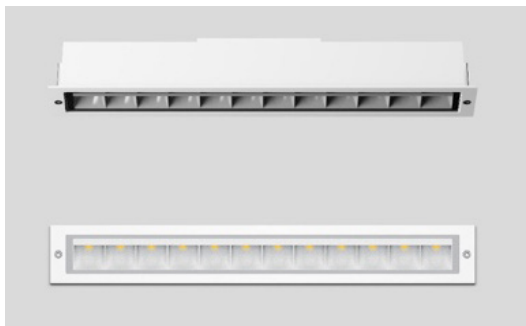


Characteristics


NEMA Type	5 H x 4 V
Maximum Candela	2878.1
Maximum Candela Angle	0 H 33 V
Horizontal Beam Angle (50%)	50.9
Vertical Beam Angle (50%)	42.2
Horizontal Field Angle (10%)	75.5
Vertical Field Angle (10%)	70.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1034
Beam Efficiency	N.A.
Field Lumens	1736
Field Efficiency	N.A.
Spill Lumens	221
Luminaire Lumens	1957
Total Efficiency	N.A.
Total Luminaire Watts	19

Zonal Lumen Summary

Zone	Lumens
0-10	66.08
10-20	215.25
20-30	403.37
30-40	520.97
40-50	431.05
50-60	214.06
60-70	70.58
70-80	20.71
80-90	2.86
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

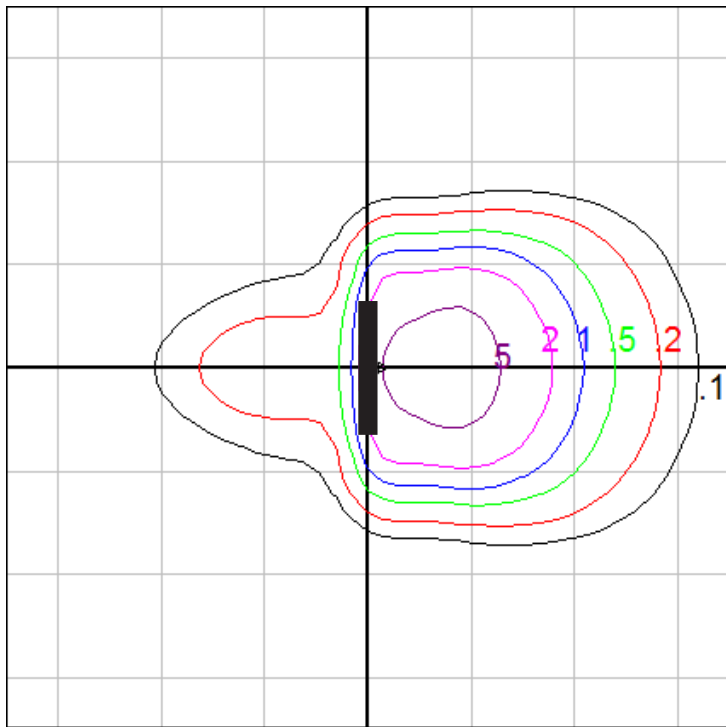

Mouting Height = 15 ft. Grid Spacing = 10 ft.

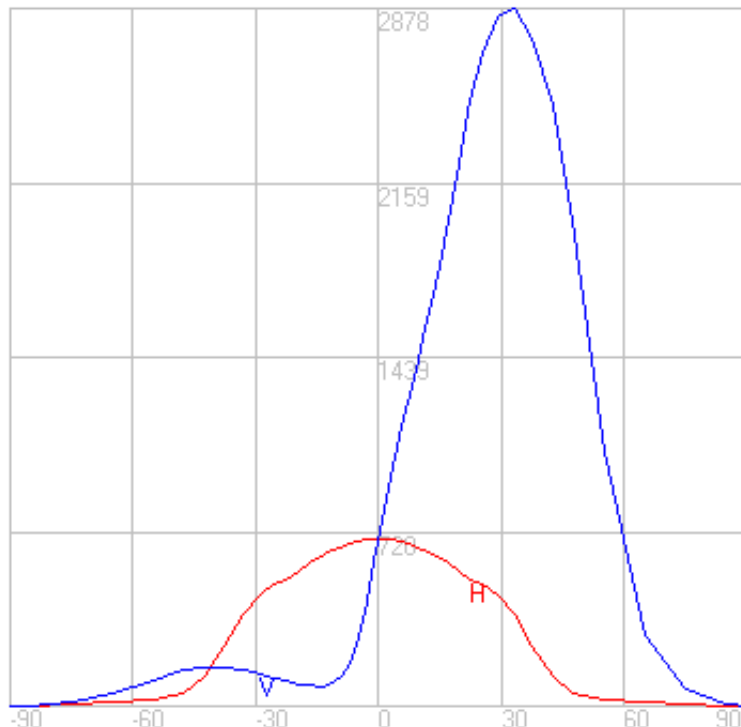

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/4/2018