BEGA

Photometric Filename: 24308.ies

TEST:	BE_24308
TEST LAB:	BEGA
DATE:	4/5/2017
LUMINAIRE:	24 308
LAMP:	48W LED

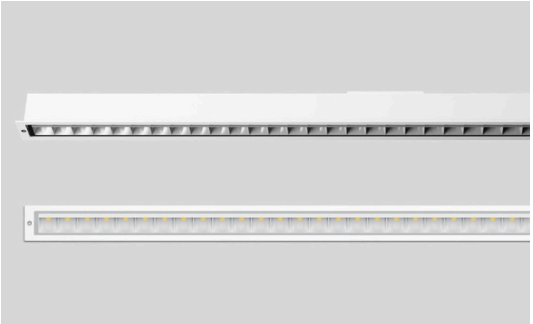

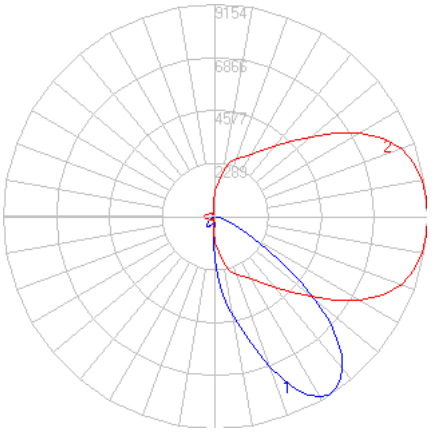

Characteristics

NEMA Type	5 H x 4 V
Maximum Candela	9139.5
Maximum Candela Angle	0 H 33 V
Horizontal Beam Angle (50%)	51.2
Vertical Beam Angle (50%)	41.7
Horizontal Field Angle (10%)	75.0
Vertical Field Angle (10%)	69.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	3338
Beam Efficiency	N.A.
Field Lumens	5454
Field Efficiency	N.A.
Spill Lumens	688
Luminaire Lumens	6141
Total Efficiency	N.A.
Total Luminaire Watts	55

Zonal Lumen Summary

Zone	Lumens
0-10	183.67
10-20	634.39
20-30	1229.39
30-40	1649.1
40-50	1405.00
50-60	711.29
60-70	220.82
70-80	60.61
80-90	7.27
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

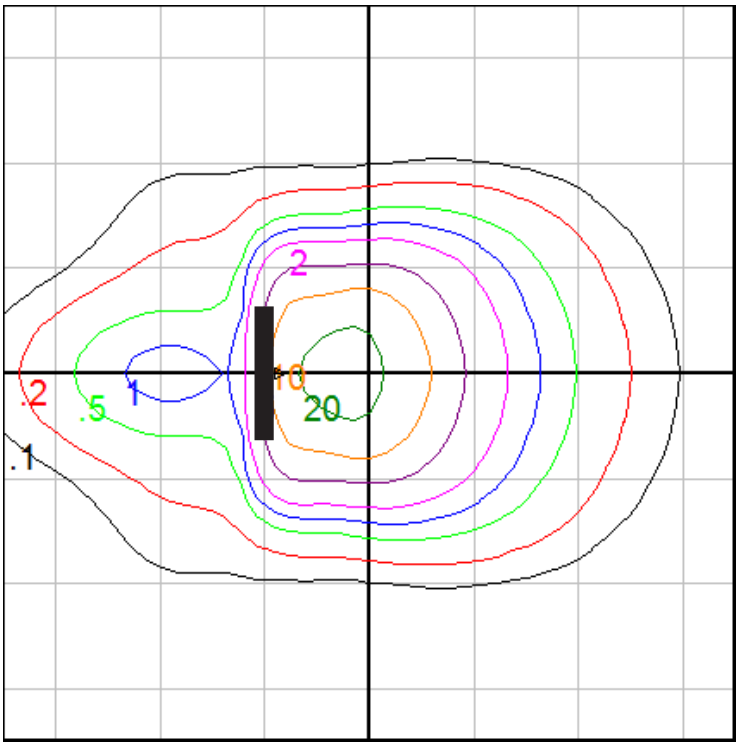

Mouting Height = 15 ft. Grid Spacing = 10 ft.

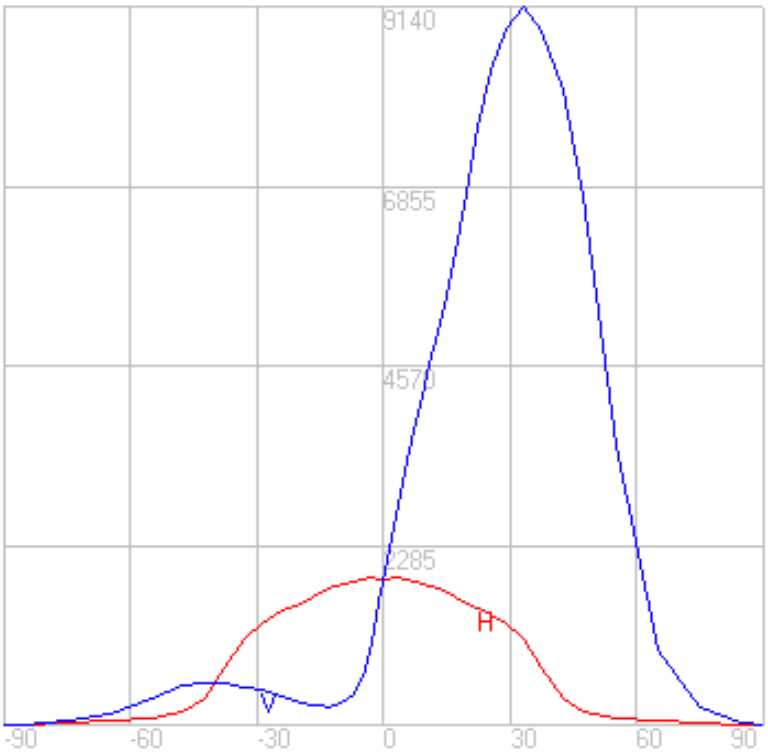

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.