


BEGA

Photometric Filename: 24316.ies

TEST: BE_24316
TEST LAB: BEGA
DATE: 4/27/2017
LUMINAIRE: 24 316
LAMP: 32W LED

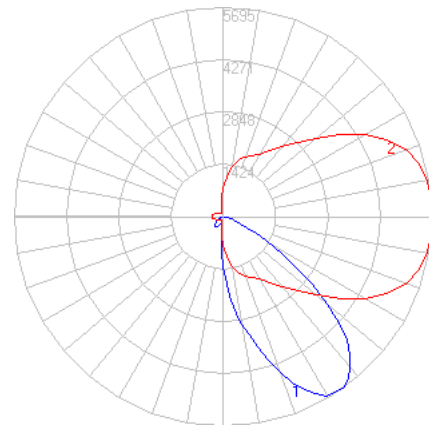


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	5693.6
Maximum Candela Angle	0 H 33 V
Horizontal Beam Angle (50%)	50.6
Vertical Beam Angle (50%)	44.3
Horizontal Field Angle (10%)	74.8
Vertical Field Angle (10%)	72.4
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	2175
Beam Efficiency	N.A.
Field Lumens	3536
Field Efficiency	N.A.
Spill Lumens	441
Luminaire Lumens	3977
Total Efficiency	N.A.
Total Luminaire Watts	36

Zonal Lumen Summary

Zone	Lumens
0-10	133.92
10-20	433.32
20-30	796.69
30-40	1036.25
40-50	882.95
50-60	466.83
60-70	155.13
70-80	43.00
80-90	5.11
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

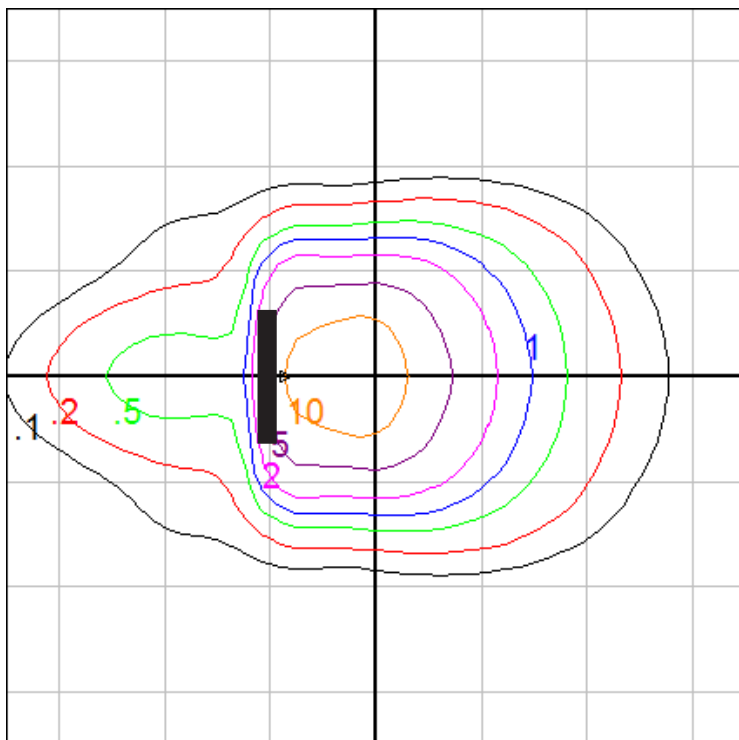

Mouting Height = 15 ft. Grid Spacing = 10 ft.

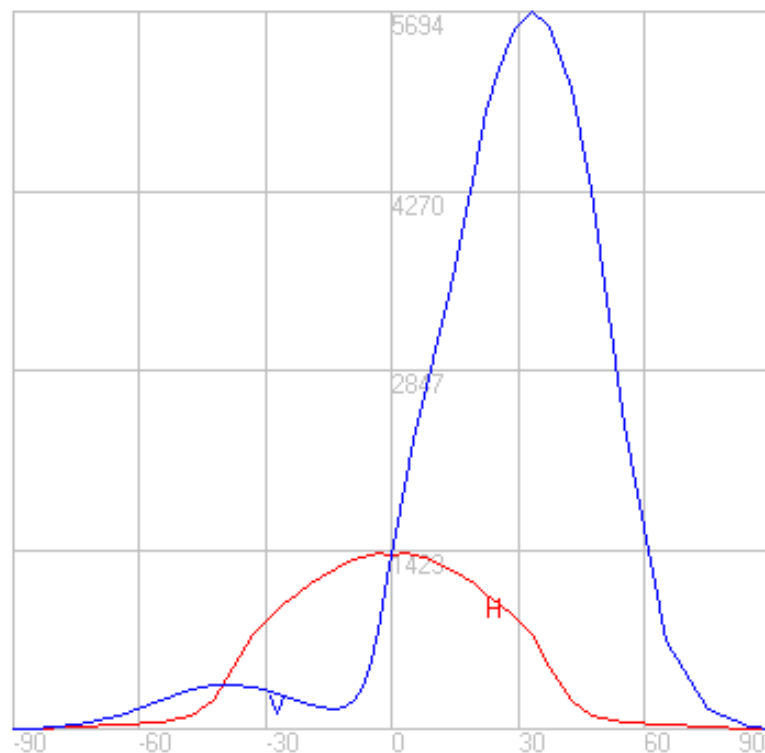

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/24/2018