


Tools Required:

- 3mm hex head screwdriver

Overview:

LED Watts: 33.6W
System Watts: 38.0W
Controllability: 0-10V dimmable
Weight: 5.8 lbs.
Protection Class: IP65



Dimensions

A: 12-5/8
B: 4-1/4
C: 6




Notice to Installer:

1. See page 2 for specific product safety warnings.
2. Mounts directly to finished surface over standard recessed single gang box (by others)
3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.

Installation: Luminaire

1. Loosen (2) 3mm hex head set screws on luminaire faceplate to separate luminaire housing and mounting plate.
2. Feed luminaire wires through luminaire base / mounting plate.
3. Make supply wiring and luminaire wiring connections in the octagonal wiring box
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER WIRE
4. Place a small bead of silicone around the back side of the mounting base and luminaire that will come in contact with the finished wall (exterior applications only).
5. Mount mounting plate to wall over standard recessed single gang box using hardware by others.
6. Mount luminaire to mounting plate and tighten (2) 3mm hex head set screws to secure luminaire.

Figure 1:

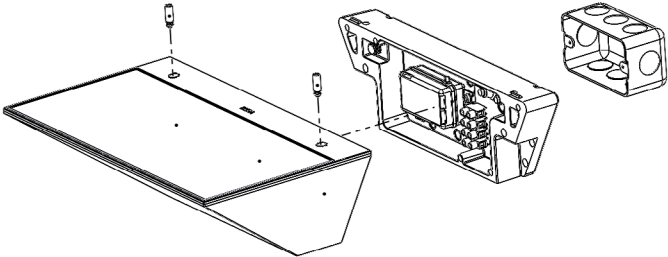

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Maintenance:

Clean regularly with solvent-free cleaner removing dirt and debris. Do not use high pressure cleaners.

Replacement Parts

See label inside of fixture for LED replacement part number.
Consult factory for all other replacement components.

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
SUITABLE FOR WET LOCATIONS.
WALL MOUNT ONLY
SUITABLE FOR MOUNTING WITHIN 1.2 m (4 ft) OF THE GROUND
MIN 60°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.
CONVIENT AUX EMPLACEMENTS MOUILLÉS.
INSTALLATION MURALE SEULEMENT
PEUT ÊTRE INSTALLÉ À MOINS DE 1,2 m (4 pi) DU SOL
LES FILS D'ALIMENTATION 60°C MIN.