
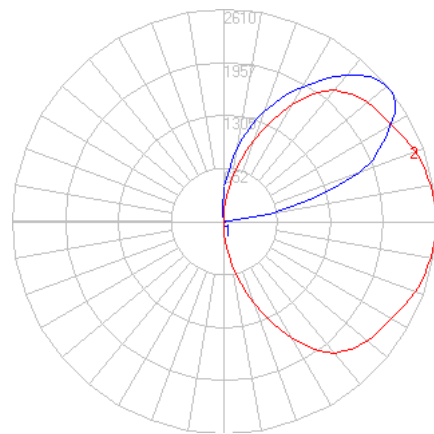


BEGA

Photometric Filename: 24362.IES

TEST: BE_24362
TEST LAB: BEGA
DATE: 1/11/2016
LUMINAIRE: 24 362
LAMP: 33.6W LED

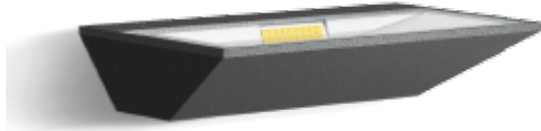


Characteristics


NEMA Type	7 H x 5 V
Maximum Candela	2578.2
Maximum Candela Angle	0 H 47.5 V
Horizontal Beam Angle (50%)	105.9
Vertical Beam Angle (50%)	56.5
Horizontal Field Angle (10%)	142.1
Vertical Field Angle (10%)	87.3
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	2718
Beam Efficiency	N.A.
Field Lumens	3618
Field Efficiency	N.A.
Spill Lumens	94
Luminaire Lumens	3712
Total Efficiency	N.A.
Total Luminaire Watts	39

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.00
30-40	0.00
40-50	0.00
50-60	0.00
60-70	0.00
70-80	0.00
80-90	0.20
90-100	70.16
100-110	434.99
110-120	735.48
120-130	810.64
130-140	691.03
140-150	492.54
150-160	301.49
160-170	148.87
170-180	42.15

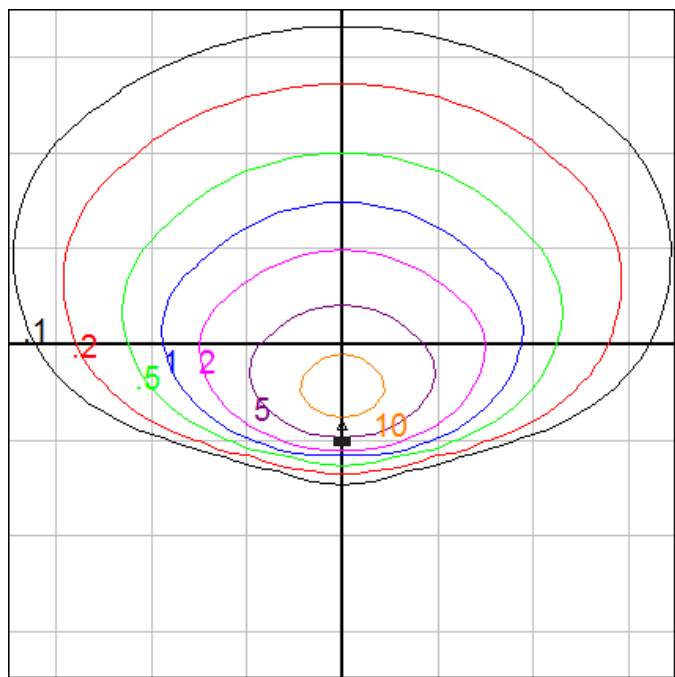

Wall Mounted Fixture - Iso-Grid on Ceiling (10' above fixture)
Grid Spacing = 10 ft.

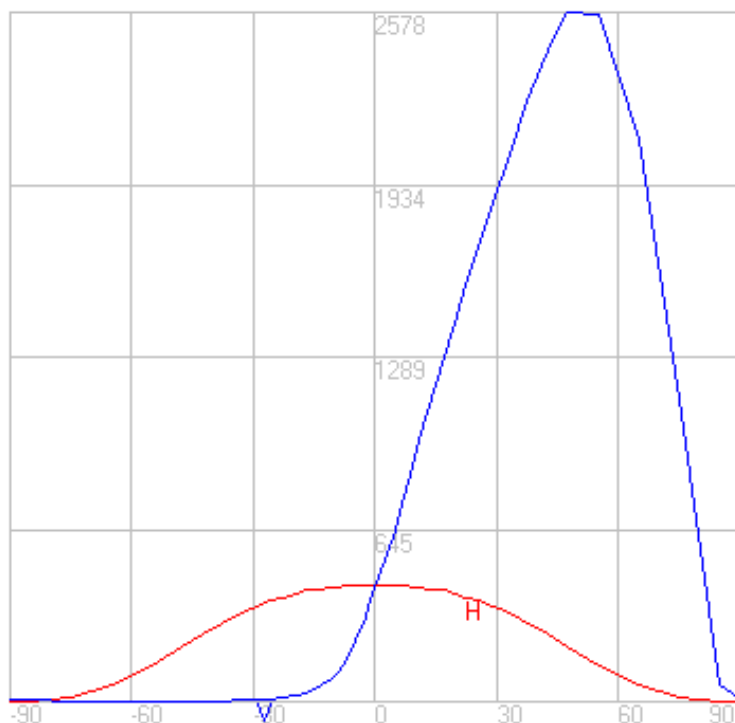

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/7/2018