


BEGA

Photometric Filename: 24592.ies

TEST: BE_24592
TEST LAB: BEGA
DATE: 5/24/2016
LUMINAIRE: 24 592
LAMP: 23.6W LED

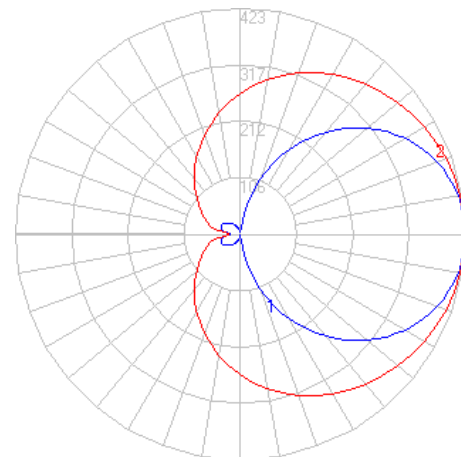


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2368
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	85
Total Luminaire Watts	28
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 m
Luminous Width (90-270)	0.08 m
Luminous Height	0.64 m

Zonal Lumen Summary

Zone	Lumens
0-10	1.27
10-20	13.00
20-30	40.69
30-40	81.13
40-50	128.68
50-60	177.12
60-70	220.27
70-80	252.51
80-90	269.44
90-100	269.44
100-110	252.51
110-120	220.27
120-130	177.12
130-140	128.68
140-150	81.13
150-160	40.69
160-170	13.00
170-180	1.27

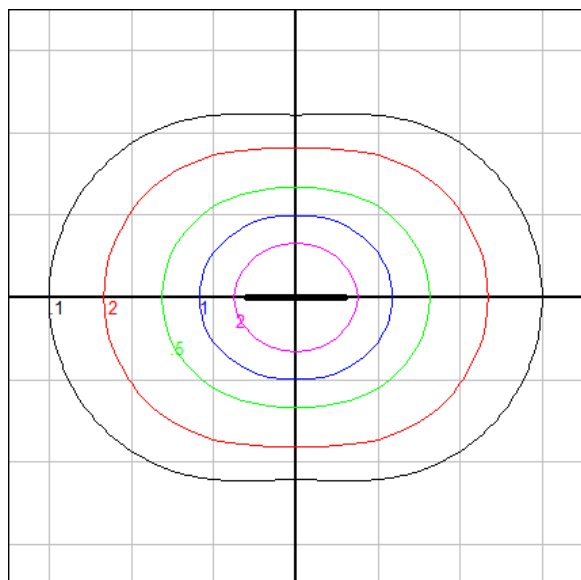

Ceiling Mount - Isofootcandle grid on floor

Mounting Height = 10 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/14/2018