
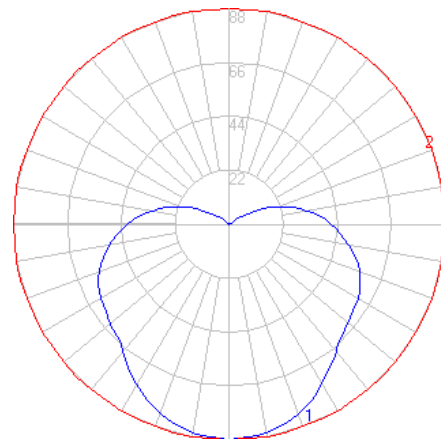


BEGA

Photometric Filename: 24598.ies

TEST: BE_24598
TEST LAB: BEGA
DATE: 5/23/2017
LUMINAIRE: 24 598
LAMP: 3.9W LED

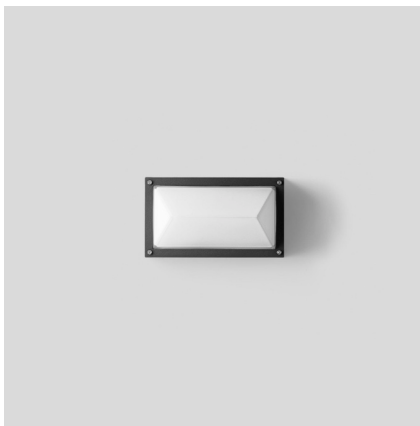


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	395
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	66
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.31 ft
Luminous Width (90-270)	0.59 ft
Luminous Height	0.15 ft

Zonal Lumen Summary

Zone	Lumens
0-10	8.32
10-20	23.90
20-30	36.48
30-40	44.75
40-50	48.58
50-60	49.60
60-70	48.28
70-80	44.05
80-90	37.05
90-100	27.62
100-110	17.11
110-120	7.71
120-130	1.59
130-140	0.09
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

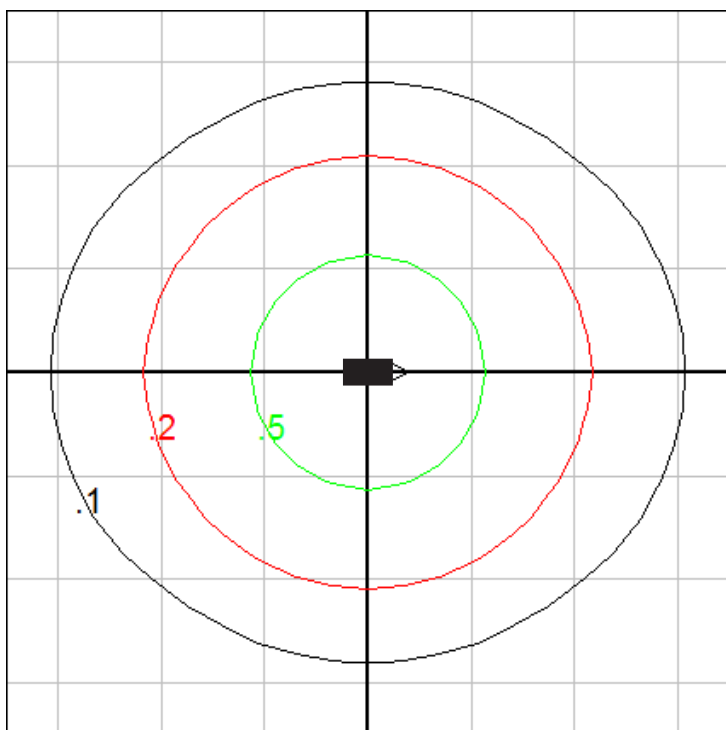

Ceiling Mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

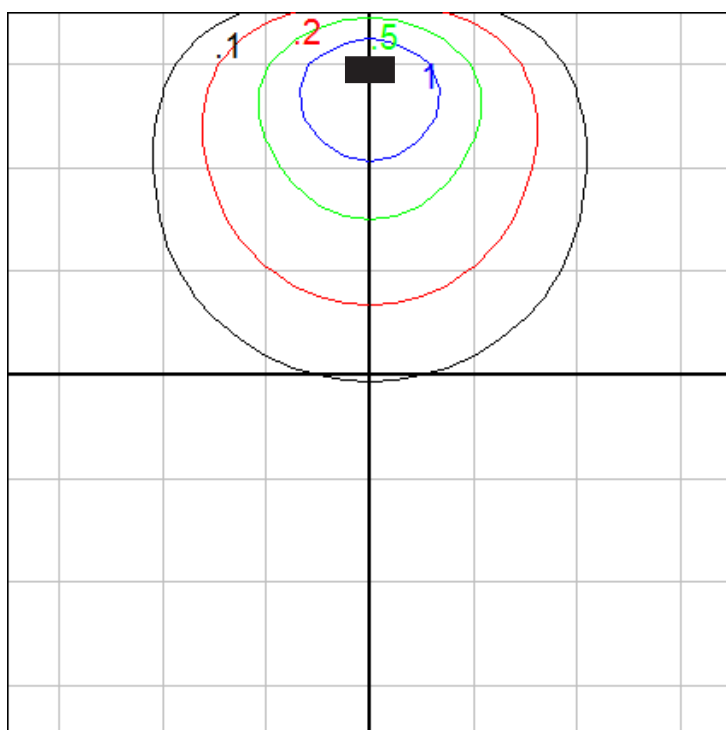

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/2/2018