
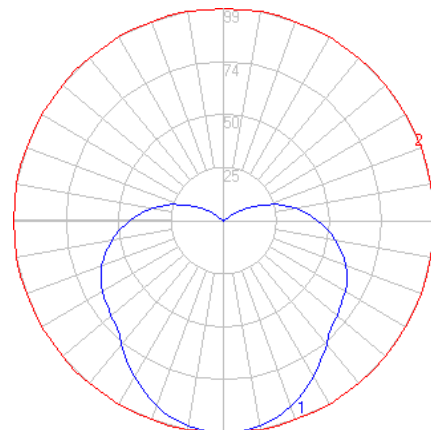


BEGA

Photometric Filename: 24599.ies

TEST: BE_24599
TEST LAB: BEGA
DATE: 7/14/2017
LUMINAIRE: 24 599
LAMP: 5.8W LED

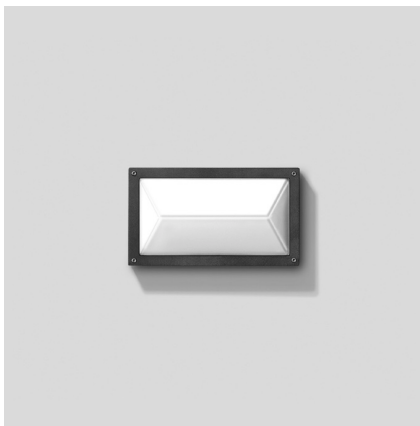


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	439
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	55
Total Luminaire Watts	8
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.30
Spacing Criterion (Diagonal)	1.42
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.41 ft
Luminous Width (90-270)	0.82 ft
Luminous Height	0.20 ft

Zonal Lumen Summary

Zone	Lumens
0-10	9.38
10-20	26.87
20-30	40.85
30-40	50.07
40-50	54.28
50-60	55.30
60-70	53.69
70-80	48.87
80-90	40.87
90-100	30.21
100-110	18.54
110-120	8.27
120-130	1.72
130-140	0.11
140-150	0.00
150-160	0.00
160-170	0.01
170-180	0.01

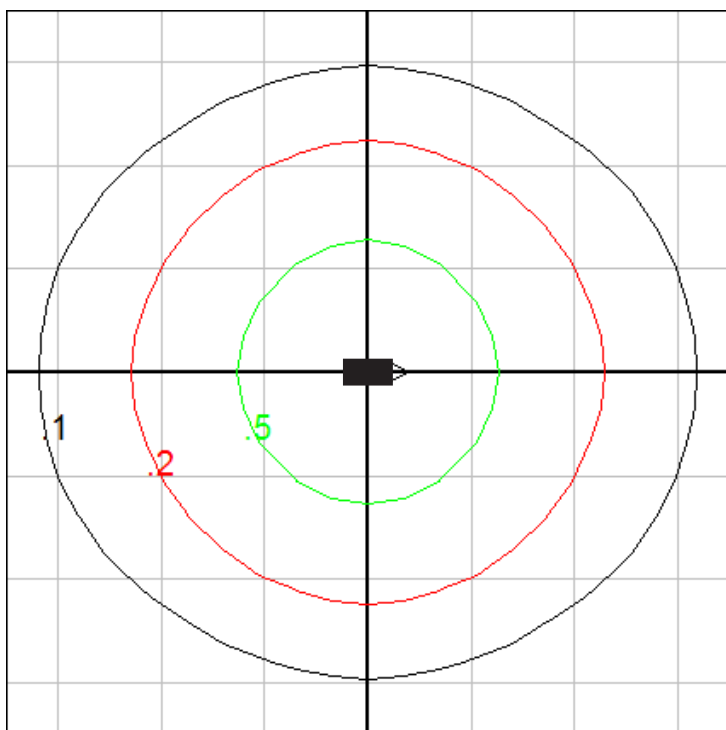

Ceiling Mount - Isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 5 ft.

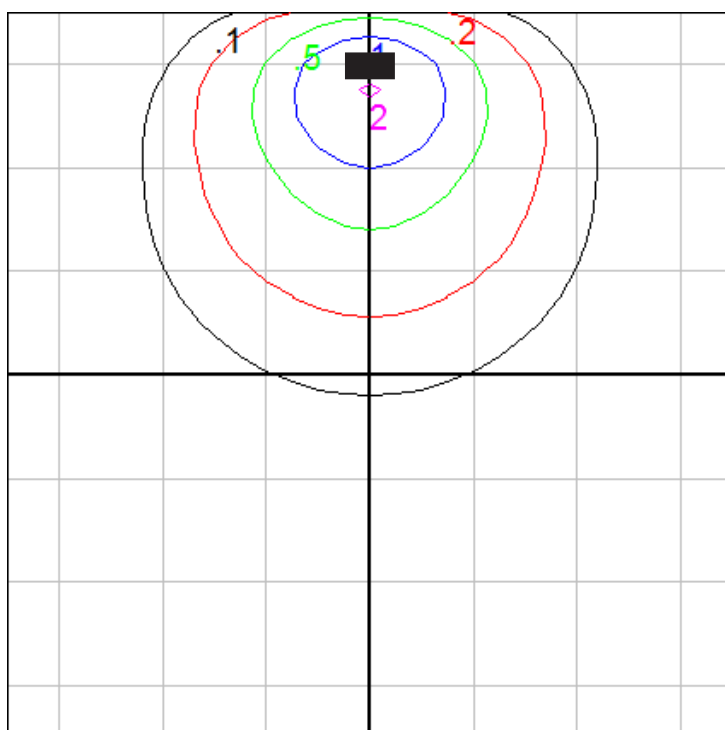

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

2/2/2018