


BEGA

Photometric Filename: 24800.IES

TEST: BE_24800
TEST LAB: BEGA
DATE: 5/5/2017
LUMINAIRE: 24 800
LAMP: 3W LED

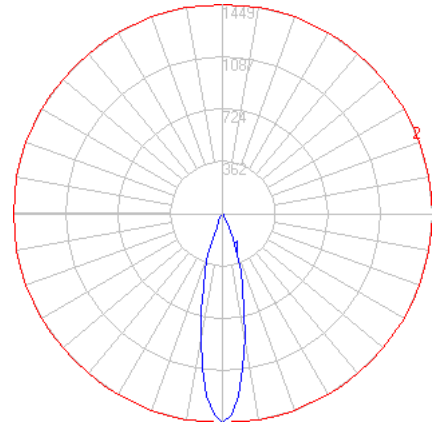


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	339
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	57
Total Luminaire Watts	6
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.42
Spacing Criterion (90-270)	0.42
Spacing Criterion (Diagonal)	0.46
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.25 ft
Luminous Width (90-270)	0.25 ft
Luminous Height	0.00 ft

Characteristics

NEMA Type	4 H x 4 V
Maximum Candela	1448.8
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	24.1
Vertical Beam Angle (50%)	24.1
Horizontal Field Angle (10%)	47.7
Vertical Field Angle (10%)	47.7
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	140
Beam Efficiency	N.A.
Field Lumens	302
Field Efficiency	N.A.
Spill Lumens	37
Luminaire Lumens	339
Total Efficiency	N.A.
Total Luminaire Watts	6

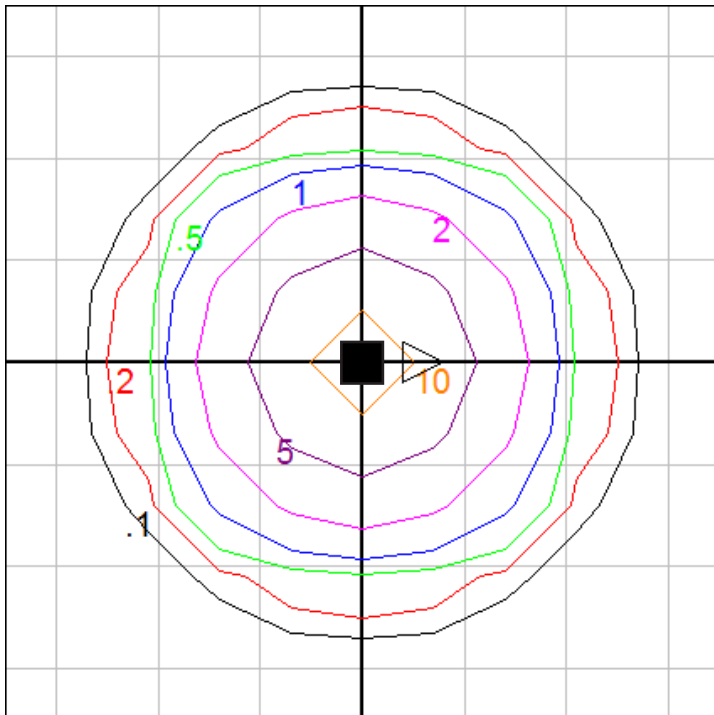

Mounting Height = 10 ft. Grid Spacing = 2.5 ft.

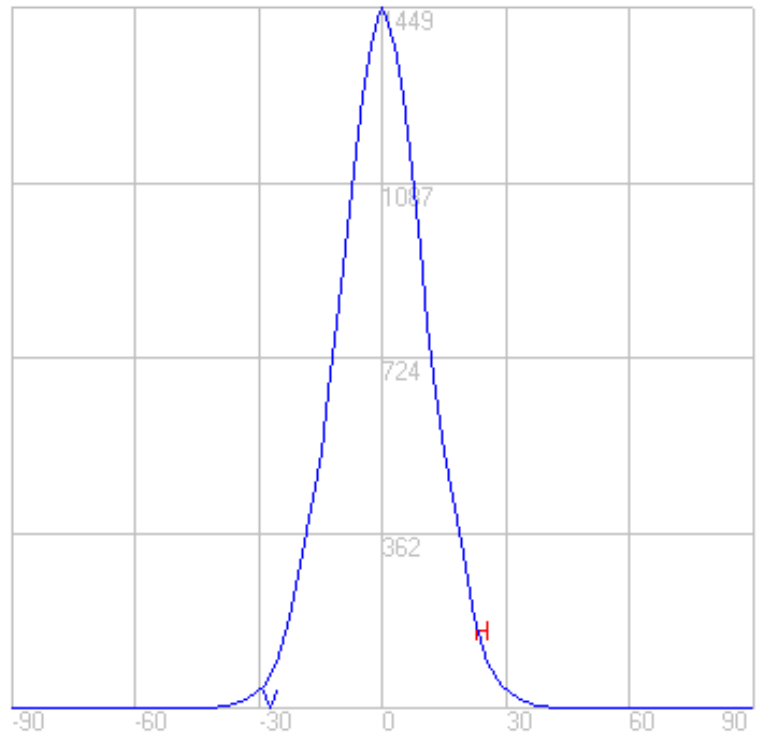

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

5/29/2018