
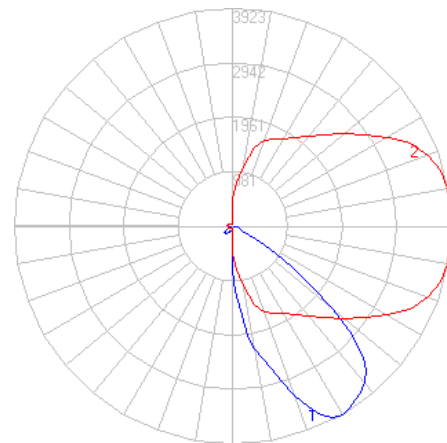


BEGA

Photometric Filename: 24815.IES

TEST: BE_24815
TEST LAB: BEGA
DATE: 10/25/2016
LUMINAIRE: 24 815
LAMP: 33.6W LED

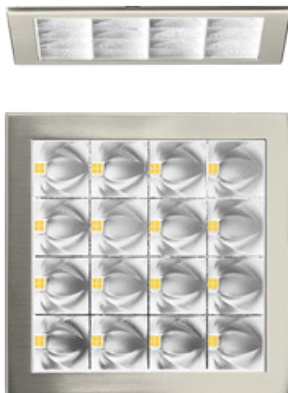


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2499
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	62
Total Luminaire Watts	40
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	2.64
Spacing Criterion (90-270)	1.08
Spacing Criterion (Diagonal)	1.38
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.47 ft
Luminous Width (90-270)	0.47 ft
Luminous Height	0.00 ft

Characteristics

NEMA Type	4 H x 4 V
Maximum Candela	3908
Maximum Candela Angle	-3 H 29 V
Horizontal Beam Angle (50%)	52.6
Vertical Beam Angle (50%)	44.5
Horizontal Field Angle (10%)	69.5
Vertical Field Angle (10%)	66.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	1602
Beam Efficiency	N.A.
Field Lumens	2312
Field Efficiency	N.A.
Spill Lumens	208
Luminaire Lumens	2520
Total Efficiency	N.A.
Total Luminaire Watts	40

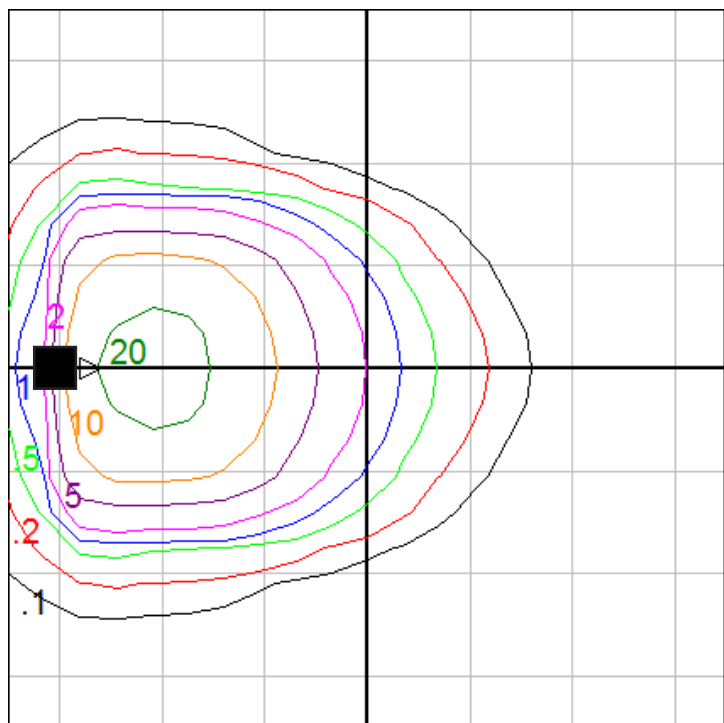

Mounting Height = 10 ft. Grid Spacing = 5 ft.

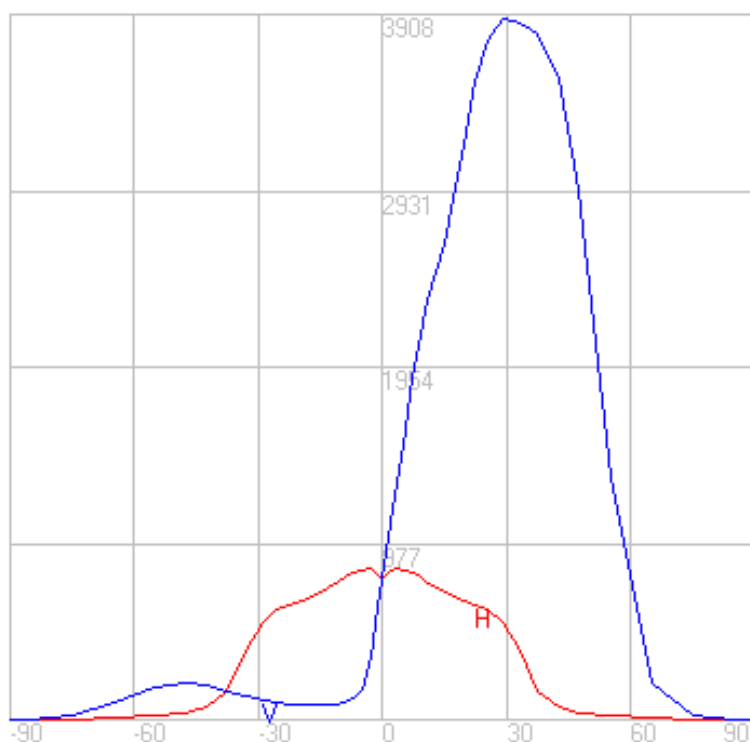

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

6/5/2018