


BEGA

Photometric Filename: 24834.ies

TEST: BE_24834
TEST LAB: BEGA
DATE: 6/14/2017
LUMINAIRE: 24 834
LAMP: 36W LED

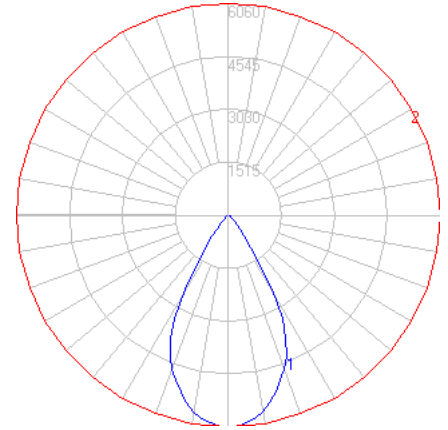


Characteristics


NEMA Type	5 H x 5 V
Maximum Candela	6059.9
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	56.4
Vertical Beam Angle (50%)	56.4
Horizontal Field Angle (10%)	79.1
Vertical Field Angle (10%)	79.1
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	3490
Beam Efficiency	N.A.
Field Lumens	4479
Field Efficiency	N.A.
Spill Lumens	403
Luminaire Lumens	4882
Total Efficiency	N.A.
Total Luminaire Watts	40

Zonal Lumen Summary

Zone	Lumens
0-10	562.49
10-20	1468.87
20-30	1728.1
30-40	763.00
40-50	244.44
50-60	86.48
60-70	13.25
70-80	0.27
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

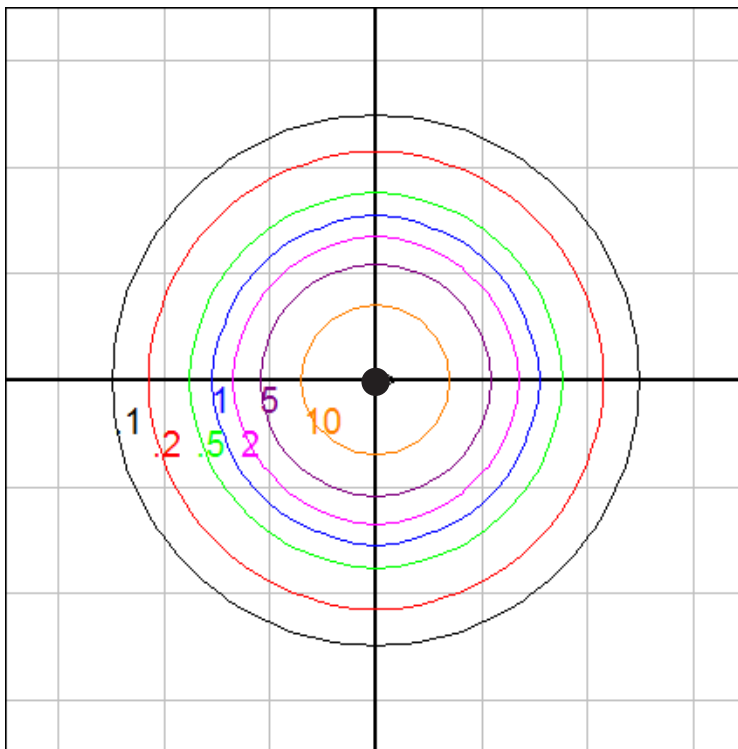

Mouting Height = 20 ft. Grid Spacing = 10 ft.

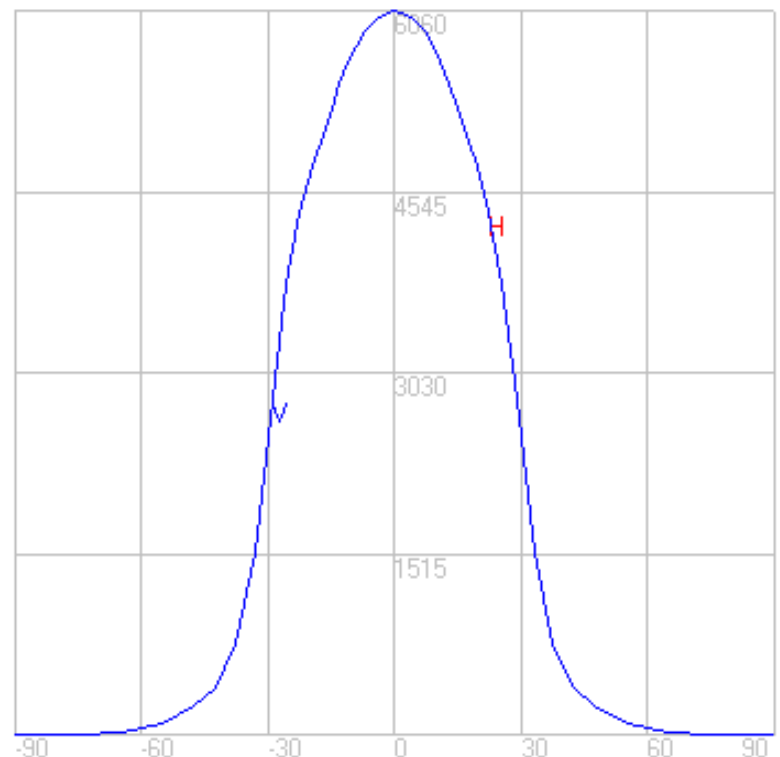

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/17/2018