


BEGA

File: 24881K4_BEGA_IES.ies

TEST: BE_24881K4
TEST LAB: BEGA
DATE: 01/12/2024
LUMINAIRE: 24 881K4
LAMP: 8W LED

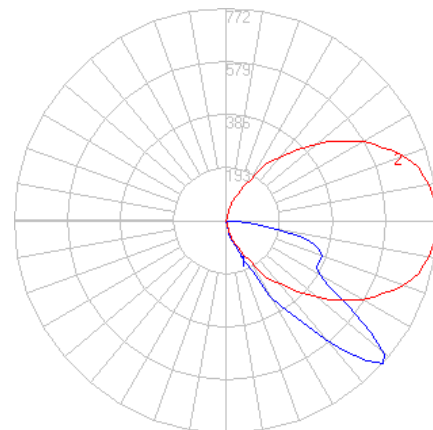

Characteristics


IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	630
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	63
Total Luminaire Watts	10
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	772.15 (360H, 47.5V)
Max. Cd. (<90 Vert.)	772.15 (360H, 47.5V)
Max. Cd. (At 90 Deg. Vert.)	5.09 (0.8%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	205.949 (32.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	24.3	N.A.	3.9
FM(30-60)	356.2	N.A.	56.6
FH(60-80)	222.8	N.A.	35.4
FVH(80-90)	26.1	N.A.	4.1
BL(0-30)	0.0	N.A.	0.0
BM(30-60)	0.0	N.A.	0.0
BH(60-80)	0.0	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL(90-100)	0.3	N.A.	0.0
UH(100-180)	< 0.05	N.A.	0.0
Total	629.7	N.A.	100.0


BUG Rating B0-U0*-G1

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplift (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

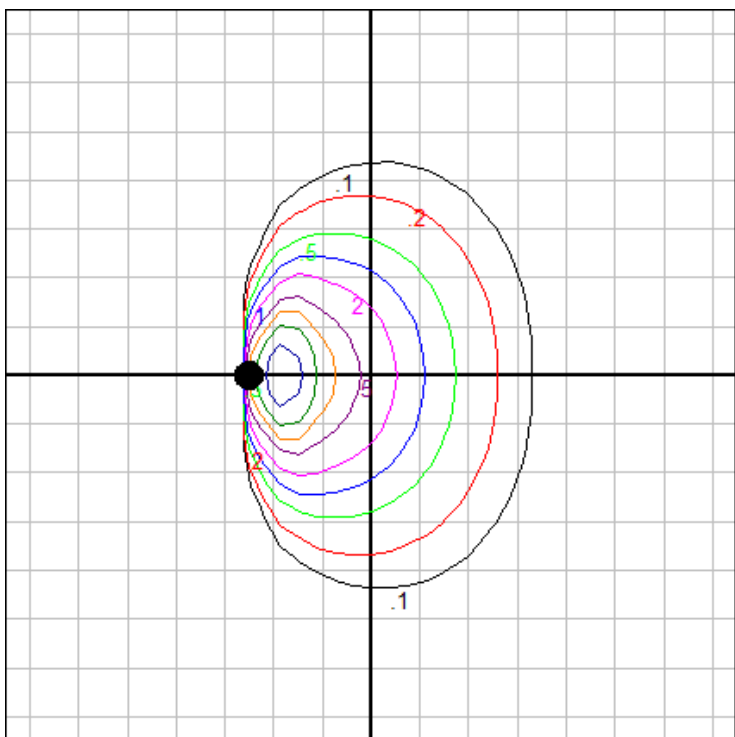

Mounting Height: 1.5 ft.

Grid Spacing: 2 ft.

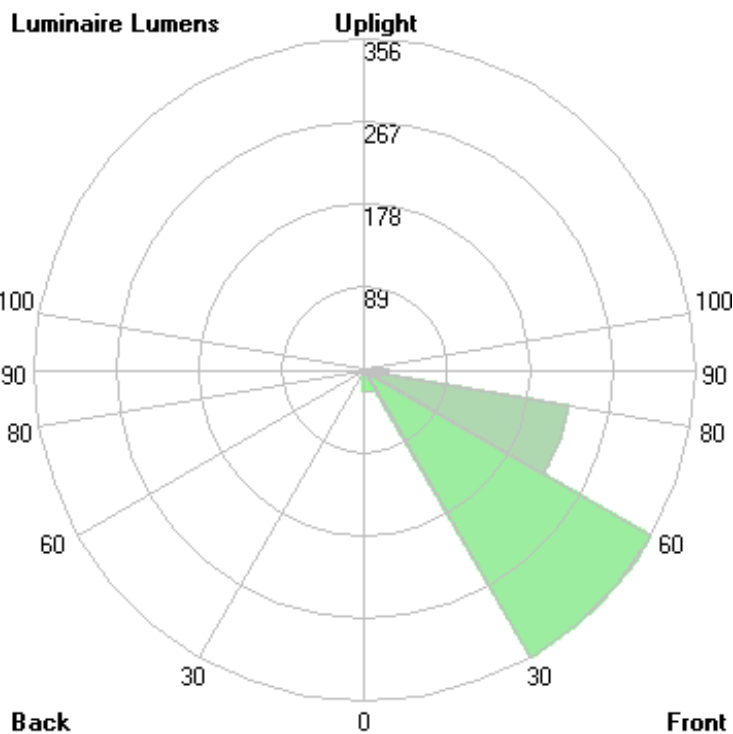

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

07/08/2026

BEGA

File: 24881K35_BEGA_IES.ies

TEST: BE_24881K4
TEST LAB: BEGA
DATE: 01/12/2024
LUMINAIRE: 24 881K35
LAMP: 8W LED

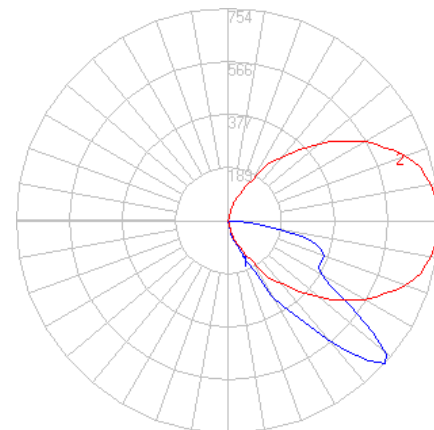

Characteristics


IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	615
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	61
Total Luminaire Watts	10
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	754.013 (360H, 47.5V)
Max. Cd. (<90 Vert.)	754.013 (360H, 47.5V)
Max. Cd. (At 90 Deg. Vert.)	4.971 (0.8%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	201.112 (32.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL(0-30)	23.7	N.A.	3.9
FM(30-60)	347.8	N.A.	56.6
FH(60-80)	217.6	N.A.	35.4
FVH(80-90)	25.5	N.A.	4.1
BL(0-30)	0.0	N.A.	0.0
BM(30-60)	0.0	N.A.	0.0
BH(60-80)	0.0	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL(90-100)	0.3	N.A.	0.0
UH(100-180)	< 0.05	N.A.	0.0
Total	614.9	N.A.	100.0

BUG Rating B0-U0*-G1

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplift (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

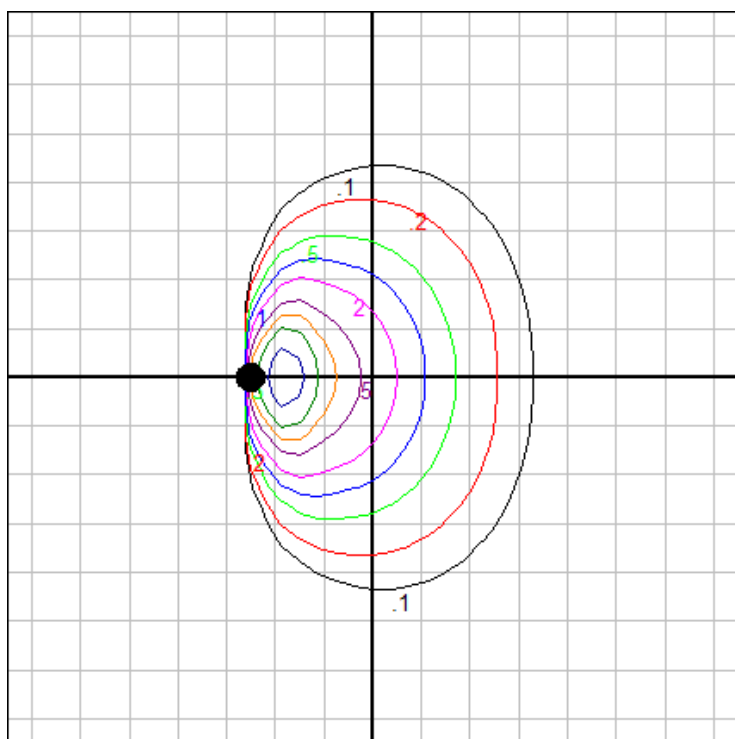


Mounting Height: 1.5 ft.

Grid Spacing: 2 ft.

Luminaire Lumens

Uplight

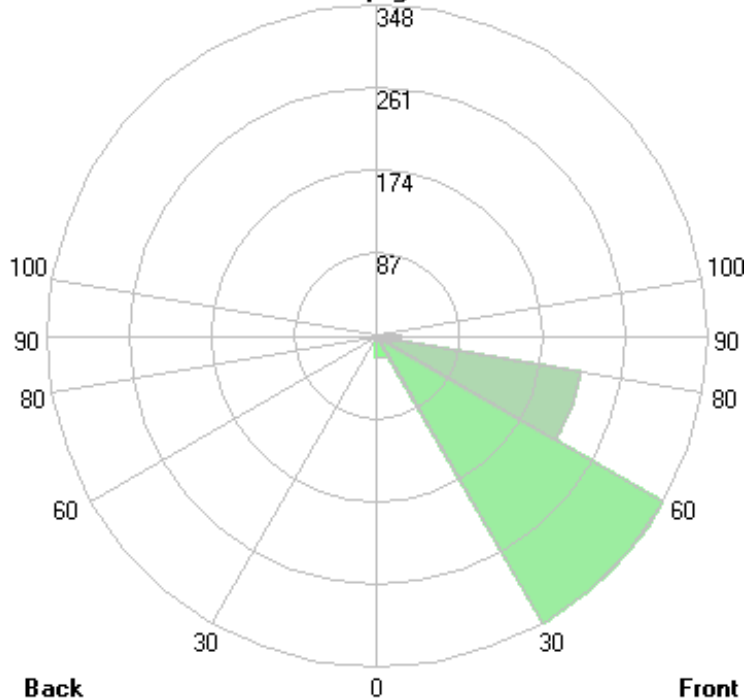

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

07/08/2026

BEGA

File: 24881K3_BEGA_IES.ies

TEST: BE_24881K4
TEST LAB: BEGA
DATE: 01/12/2024
LUMINAIRE: 24 881K3
LAMP: 8W LED

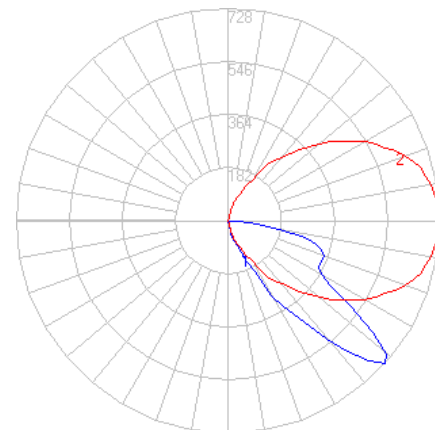

Characteristics


IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	594
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	59
Total Luminaire Watts	10
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	728.1 (360H, 47.5V)
Max. Cd. (<90 Vert.)	728.1 (360H, 47.5V)
Max. Cd. (At 90 Deg. Vert.)	4.8 (0.8%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	194.2 (32.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL(0-30)	22.9	N.A.	3.9
FM(30-60)	335.9	N.A.	56.6
FH(60-80)	210.1	N.A.	35.4
FVH(80-90)	24.6	N.A.	4.1
BL(0-30)	0.0	N.A.	0.0
BM(30-60)	0.0	N.A.	0.0
BH(60-80)	0.0	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL(90-100)	0.3	N.A.	0.0
UH(100-180)	< 0.05	N.A.	0.0
Total	593.8	N.A.	100.0

BUG Rating B0-U0*-G1

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplift (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

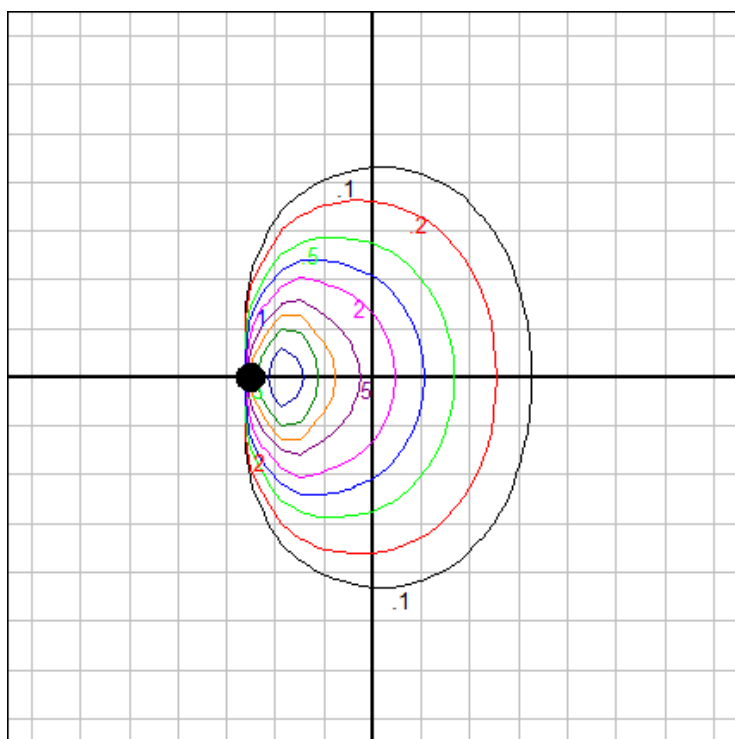


Mounting Height: 1.5 ft.

Grid Spacing: 2 ft.

Luminaire Lumens

Uplight

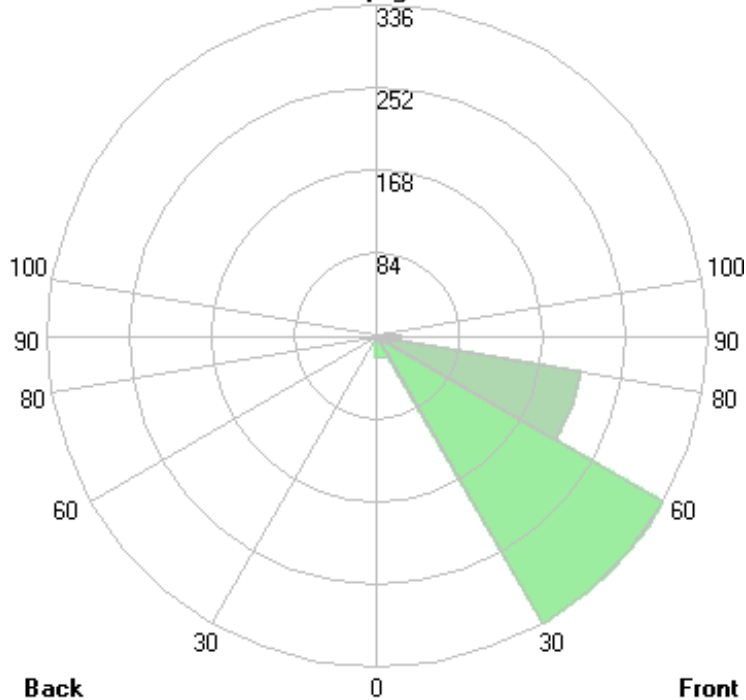

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.


BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

07/08/2026

BEGA

File: 24881K27_BEGA_IES.ies

TEST: BE_24881K4
TEST LAB: BEGA
DATE: 01/12/2024
LUMINAIRE: 24 881K27
LAMP: 8W LED

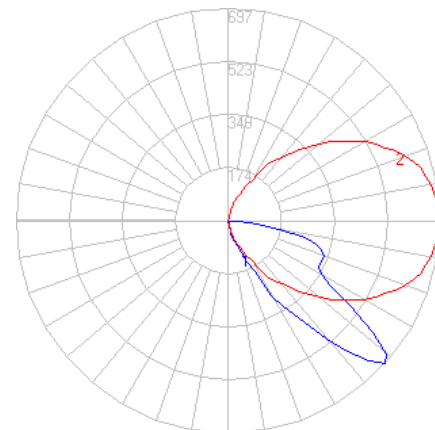

Characteristics


IES Classification	Type III
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	568
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	57
Total Luminaire Watts	10
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	697.01 (360H, 47.5V)
Max. Cd. (<90 Vert.)	697.01 (360H, 47.5V)
Max. Cd. (At 90 Deg. Vert.)	4.595 (0.8%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	185.908 (32.7%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL(0-30)	21.9	N.A.	3.9
FM(30-60)	321.5	N.A.	56.6
FH(60-80)	201.2	N.A.	35.4
FVH(80-90)	23.5	N.A.	4.1
BL(0-30)	0.0	N.A.	0.0
BM(30-60)	0.0	N.A.	0.0
BH(60-80)	0.0	N.A.	0.0
BVH(80-90)	0.0	N.A.	0.0
UL(90-100)	0.3	N.A.	0.0
UH(100-180)	< 0.05	N.A.	0.0
Total	568.4	N.A.	100.0

BUG Rating B0-U0*-G1

*Fixture has measured rating of U1 due to testing above 90 degrees and stray light from reflection off of the fixture body. Upon visual inspection of luminaire, it has a flat lens and opaque sides, there is no significant uplift (<0.5%), and it has therefore been assigned a value of U0. Consult factory for more information.

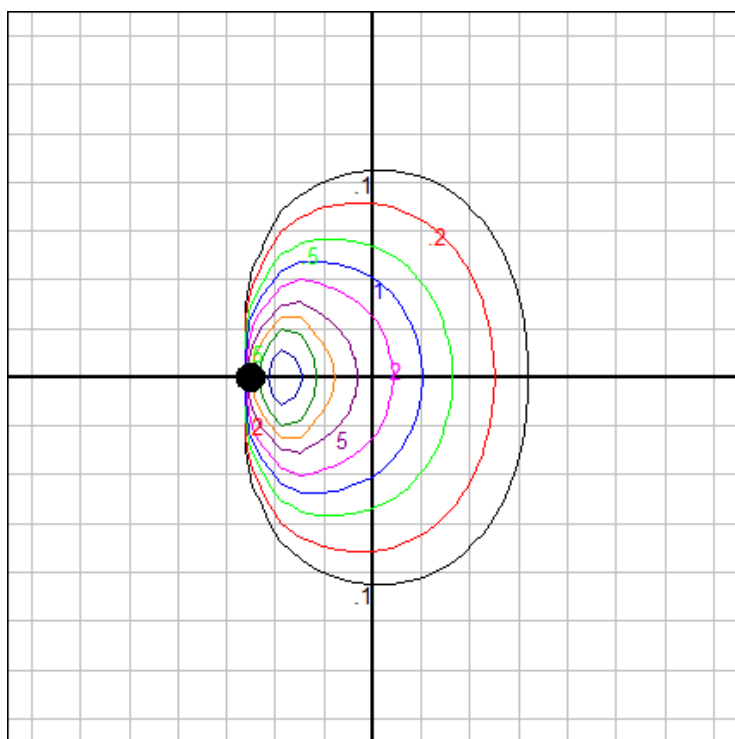


Mounting Height: 1.5 ft.

Grid Spacing: 2 ft.

Luminaire Lumens

Uplight

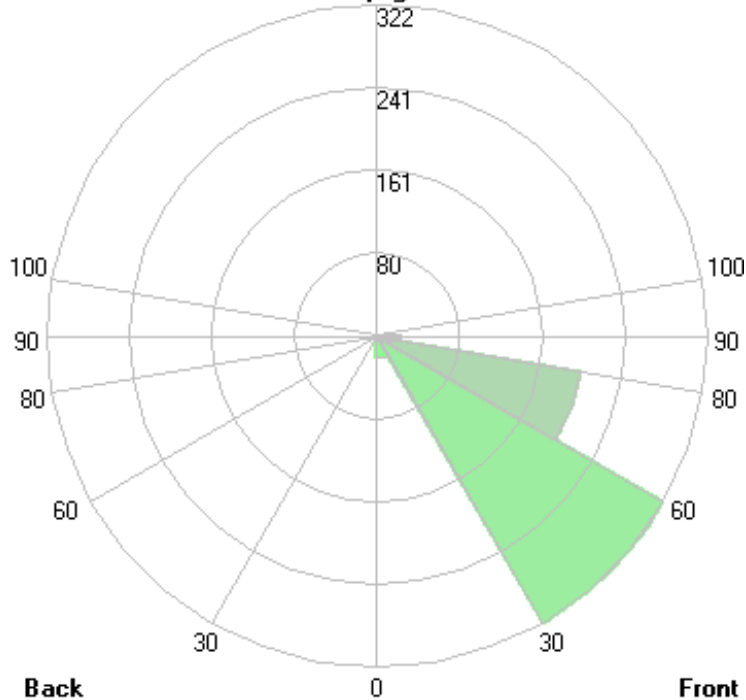

Back

0

Front

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2026

07/08/2026