

Application

Recessed wall luminaire with fully shielded light distribution that is ideal for glare-free illumination of ground surfaces, building entrances, stairs and footpaths. Separate installation housing allows for seamless coordination into construction and easy maintenance.

Materials

- Clear safety glass
- Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
- High temperature silicone gasket
- Mechanically captive stainless steel fasteners
- Silicone applied robotically to casting, plasma treated for increased adhesion
- Stainless steel hardware
- Aluminum installation housing
- Pure anodized aluminum reflector surface

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 1.98lbs.

Electrical

- Operating voltage120-277VAC
- Minimum start temperature-40° C
- LED module wattage8.0W
- System wattage10.0W
- Controllability0-10V dimming down to 1%
- Color rendering indexRa > 90
- Luminaire lumens630lm
- LED service life (L70)60000hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)


BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

- Black (BLK)
- Natural Bronze (NTB)
- White (WHT)
- CUS:
- Bronze (BRZ)
- Silver (SLV)
- RAL:

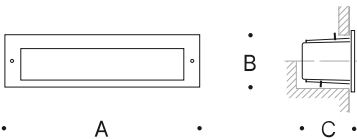

Type:

BEGA Product:

Project:

Modified:

Available options

- CUS Custom finish
- DALI-2 Enabled for DALI control system
- FSC Fusing
- MGU Marine grade undercoat
- NTB Natural bronze (premium finish)
- RAL RAL Classic, matte finish

Included (available for pre-shipment)

- BB24065 Installation housing



Recessed wall luminaire · Fully shielded

	LED	A	B	C
B24881	8.0W	12 ¹ / ₂	2 ³ / ₄	5