

Application

Recessed wall luminaire with fully shielded light distribution that is idea for glare-free illumination of ground surfaces, building entrances, stairs and footpaths. Separate installation housing allows for seamless coordination into construction and easy maintenance.

Materials

- Clear safety glass
- Marine grade, copper free (≤0.3% copper content) A360.0 aluminum alloy
- High temperature silicone gasket
- Mechanically captive stainless steel fasteners
- Silicone applied robotically to casting, plasma treated for increased adhesion
- Stainless steel hardware
- Aluminum installation housing
- Pure anodized aluminum reflector surface

NRTL listed to North American Standards, suitable for wet locations
Protection class IP 65

Weight: 5.94 lbs.

Electrical

Operating voltage	120-277VAC
Minimum start temperature	-20° C
LED module wattage	20.0W
System wattage	24.0W
Controllability	0-10V dimming down to 1%
Color rendering index	Ra > 90
Luminaire lumens	1877 lm
LED service life (L70)	60000hrs

LED color temperature

- 4000K (K4)
- 3500K (K35)
- 3000K (K3)
- 2700K (K27)


BEGA can supply you with suitable LED replacement modules for up to 20 years after the purchase of LED luminaires - see website for details

Finish

All BEGA standard finishes are matte, textured powder coat with minimum 3 mil thickness. BEGA Unidure® finish provides superior fade protection in Black, Bronze, and Silver. BEGA standard White is a super durable polyester powder. Optionally available RAL, custom, and premium colors provided in polyester powder and/or liquid paint.

Available colors

Black (BLK)	Bronze (BRZ)
Natural Bronze (NTB)	Silver (SLV)
White (WHT)	RAL:
CUS:	

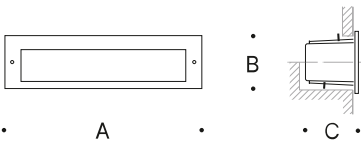

Recessed wall luminaire · Fully shielded

	LED	A	B	C
B24884	20.0W	20 ³ / ₈	4 ⁷ / ₈	5 ¹ / ₂

Type:

BEGA Product:

Project:

Modified:

Available options

CUS	Custom finish
DALI-2	Enabled for DALI control system
FSC	Fusing
MGU	Marine grade undercoat
NTB	Natural bronze (premium finish)
RAL	RAL Classic, matte finish

Included (available for pre-shipment)

BB24062	Installation housing
---------	----------------------

