
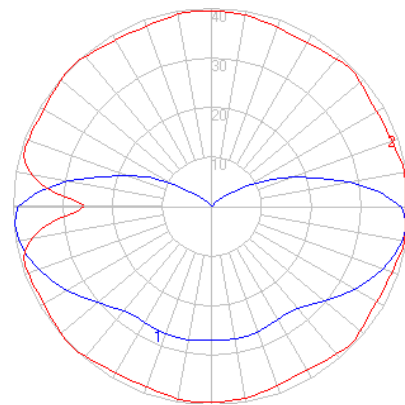


BEGA

Photometric Filename: 31171.IES

TEST: BE31171
TEST LAB: BEGA
DATE: 11/12/2014
LUMINAIRE: 31 171
LAMP: 6.3W LED

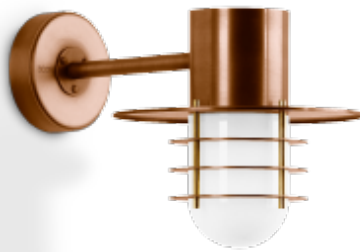


Characteristics

IES Classification	Type VS
Longitudinal Classification	Very Long
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	286
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	32
Total Luminaire Watts	9
Ballast Factor	1.00
Upward Waste Light Ratio	0.27
Max. Cd.	40.4 (135H, 85V)
Max. Cd. (<90 Vert.)	40.4 (135H, 85V)
Max. Cd. (At 90 Deg. Vert.)	39.7 (13.9%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	40.4 (14.1%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	11.4	N.A.	4.0
FM (30-60)	33.6	N.A.	11.8
FH (60-80)	37.6	N.A.	13.2
FVH (80-90)	21.3	N.A.	7.4
BL (0-30)	11.6	N.A.	4.1
BM (30-60)	34.2	N.A.	12.0
BH (60-80)	37.9	N.A.	13.2
BVH (80-90)	20.8	N.A.	7.3
UL (90-100)	35.7	N.A.	12.5
UH (100-180)	41.8	N.A.	14.6
Total	285.9	N.A.	100.0

BUG Rating B0-U2-G1

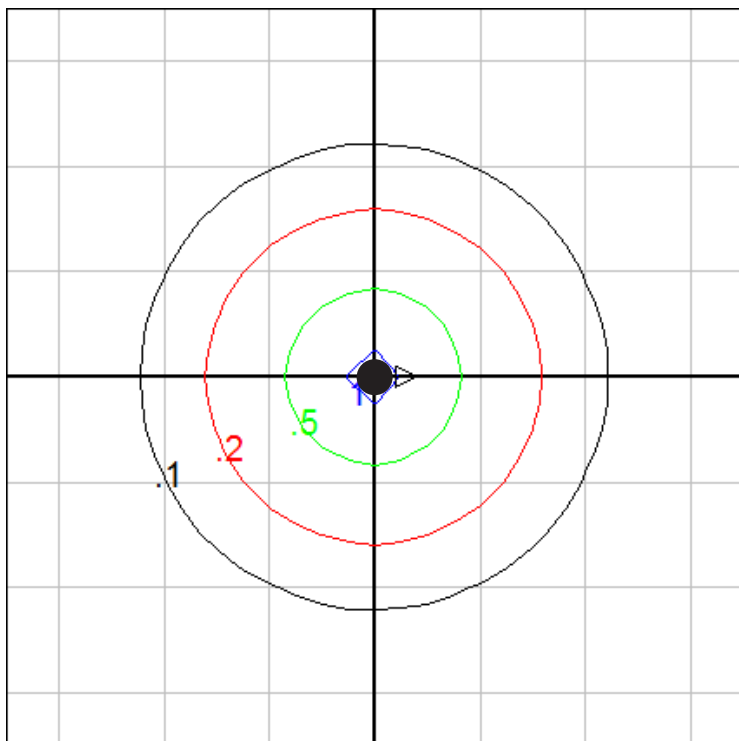


Wall Mount - Isogrid on Floor

Mounting Height = 5 ft.

Grid Spacing = 5 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

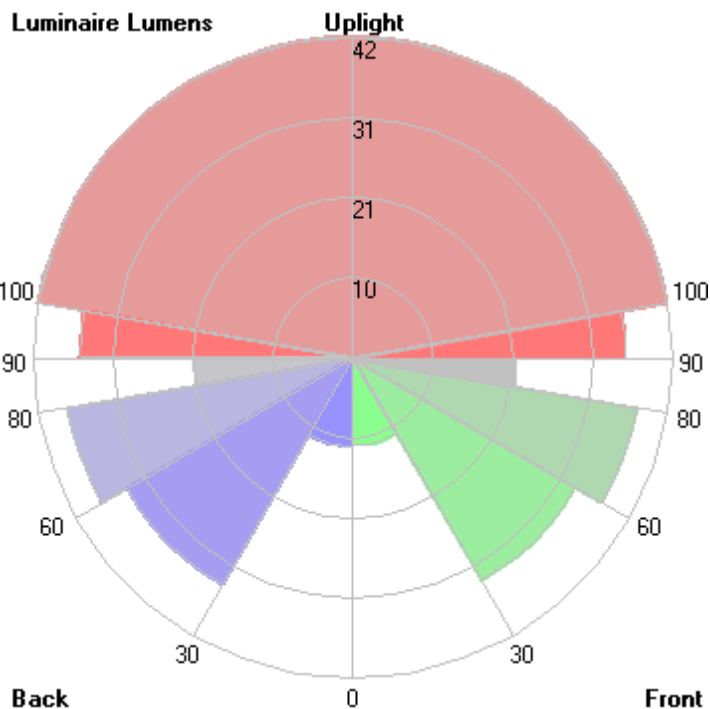

7/24/2017