


Tools Required:

- 4mm hex key
- Phillips head screw driver medium



Dimensions

- A: 10-1/4 "
- B: 10-1/4 "
- C: 3-1/2 "



Protection Class: IP 65


Weight: 8.0 lbs.

Notice to Installer for 33 136:

- 1. For ceiling and wall applications only.
- 2. Mounts directly to wall or ceiling OVER standard recessed 4" octagonal wiring box (by others).
- 3. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and supporting wall.

33 136 - Installation:

- 1. Unscrew (4) trim screws and remove trim and glass lens.
- 2. Make supply wiring and luminaire wiring connections inside the octagonal wiring box:
  - MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
  - NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
  - GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
- 0-10V Dimming (if applicable):
  - DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
  - DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE
- 3. Mount luminaire to wall or ceiling using 8-32 x 1 1/2" screws.
  - NOTE: Wiring box will be off center from luminaire to accomodate wire entry.
- 4. Replace trim and glass lens and tighten (4) screws.

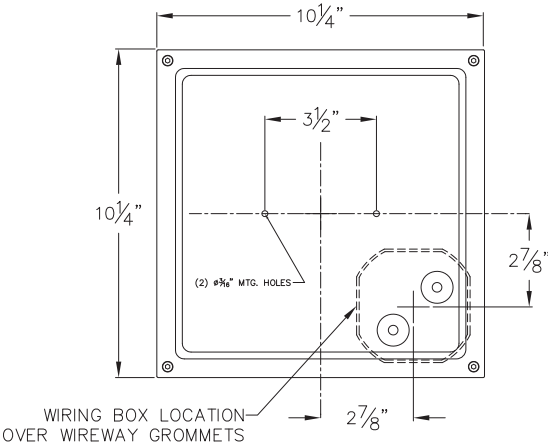

Relamping/Maintenance

Undo trim screws and remove casting. Carefully remove lens with attached gasket to relamp. Clean luminaire and lens using only solvent-free cleansers. Replace lens and casting.

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Trim	221815
Lens	11275111
Gasket	830547
Driver (120V-277V)	75983-08
LED Module (3000K)	LED-0620/830
LED Module (4000K)	LED-0620/840

Lamp: 16.3W LED Module

**Product Safety Warnings:**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.**

**MIN 90°C SUPPLY CONDUCTORS.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.**

**LES FILS D'ALIMENTATION 90°C MIN.**

---