


BEGA

Photometric Filename: 33395.IES

TEST: BE_33395
TEST LAB: BEGA
DATE: 8/4/2016
LUMINAIRE: 33 395
LAMP: 35.8W LED

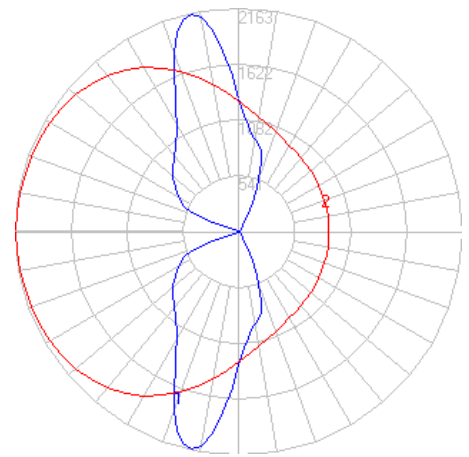


Characteristics


IES Classification	N.A.
Longitudinal Classification	N.A.
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	5556
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	129
Total Luminaire Watts	43
Ballast Factor	1.00
Upward Waste Light Ratio	0.50
Max. Cd.	2163.3 (180H, 167.5V)
Max. Cd. (<90 Vert.)	2163.3 (180H, 12.5V)
Max. Cd. (At 90 Deg. Vert.)	10 (0.2%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	8.5 (0.2%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)

Zonal Lumen Summary

Zone	Lumens
0-10	130.69
10-20	397.34
20-30	527.20
30-40	512.49
40-50	466.25
50-60	401.19
60-70	278.93
70-80	61.72
80-90	2.08
90-100	2.08
100-110	61.72
110-120	278.93
120-130	401.19
130-140	466.25
140-150	512.49
150-160	527.20
160-170	397.34
170-180	130.69

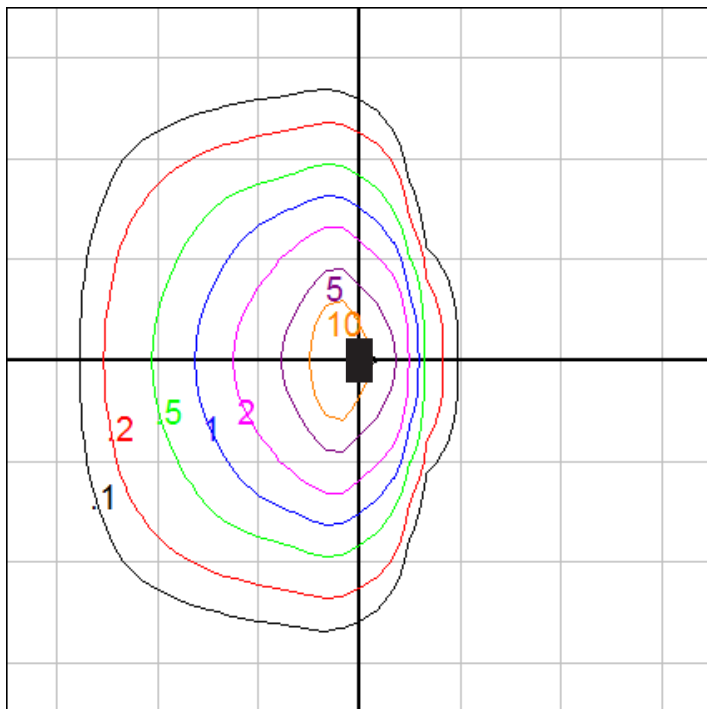

Wall mount - isofootcandle grid on floor
Mounting Height = 10 ft. Grid Spacing = 10 ft.

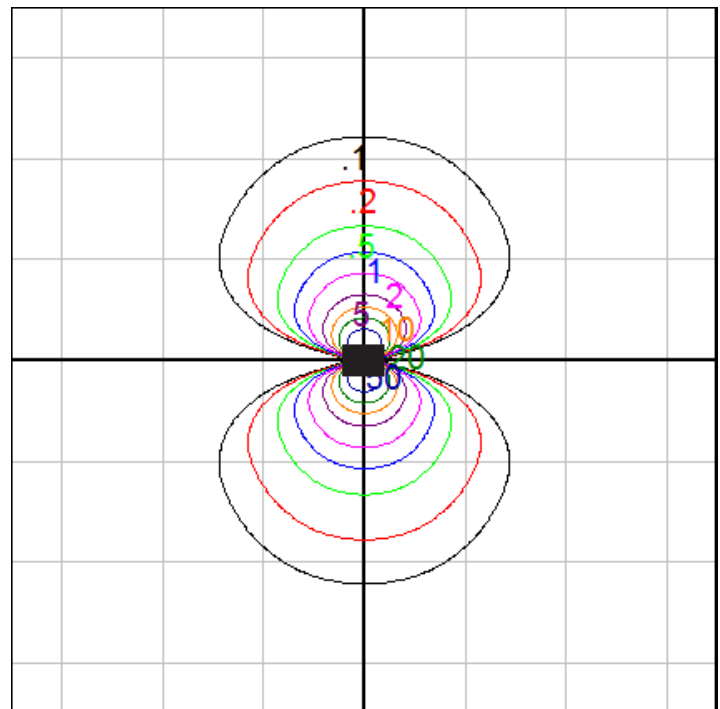

Wall mount - isofootcandle grid on wall
Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

8/29/2018