


BEGA

Photometric Filename: 33428.IES

TEST: BE_33428
TEST LAB: BEGA
DATE: 9/22/2017
LUMINAIRE: 33 428
LAMP: 2.9W LED

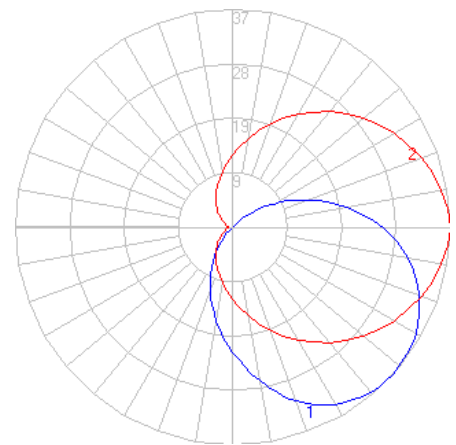


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	102
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	26
Total Luminaire Watts	4
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	2.28
Spacing Criterion (90-270)	1.20
Spacing Criterion (Diagonal)	1.46
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.16 ft
Luminous Width (90-270)	0.62 ft
Luminous Height	0.16 ft


Lum. Classification System (LCS)

LCS Zone	Lumens %	Lamp %	% Lum
FL (0-30)	10.9	N.A.	10.7
FM (30-60)	30.2	N.A.	29.6
FH (60-80)	21.8	N.A.	21.4
FVH (80-90)	9.0	N.A.	8.8
BL (0-30)	5.8	N.A.	5.7
BM (30-60)	5.9	N.A.	5.8
BH (60-80)	1.5	N.A.	1.5
BVH (80-90)	0.5	N.A.	0.5
UL (90-100)	7.3	N.A.	7.2
UH (100-180)	9.1	N.A.	8.9
Total	102.0	N.A.	100.0

BUG Rating B0-U1-G0

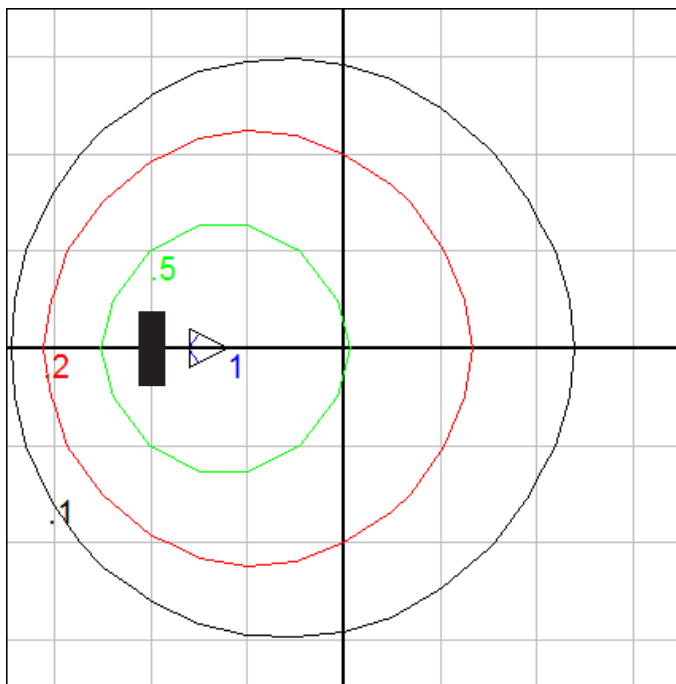

Wall Mount - Isofootcandle Grid on Floor
Mounting Height = 5 ft. Grid Spacing = 2.5 ft.

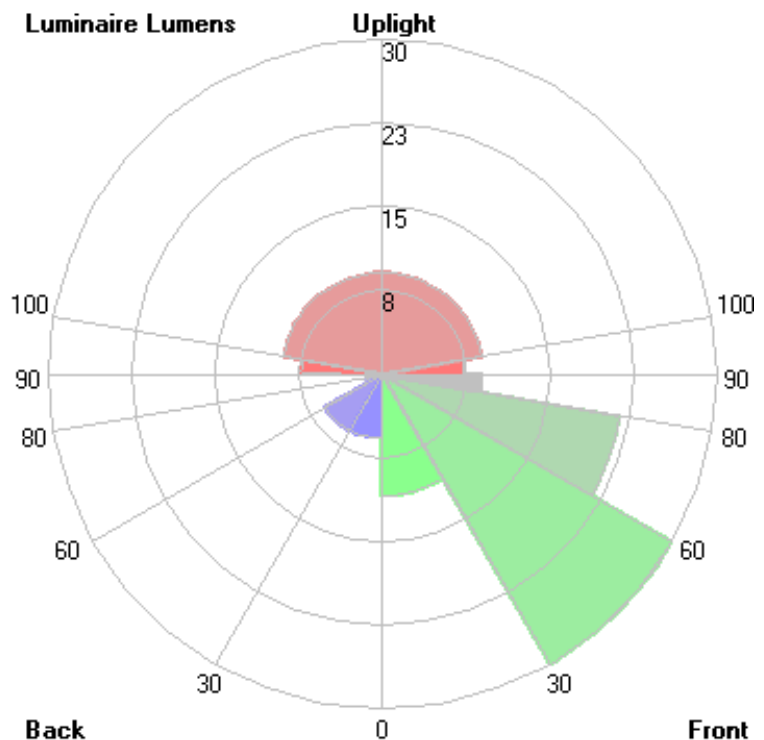

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/8/2018