


BEGA

Photometric Filename: 33528.ies

TEST: BE_33528
TEST LAB: BEGA
DATE: 4/19/2017
LUMINAIRE: 33 528
LAMP: 2.9W LED

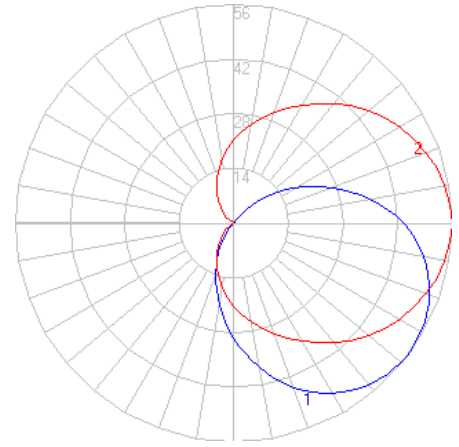


Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	186
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	46
Total Luminaire Watts	4
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	2.40
Spacing Criterion (90-270)	1.34
Spacing Criterion (Diagonal)	1.58
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.23 ft
Luminous Width (90-270)	0.56 ft
Luminous Height	0.28 ft


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	15.8	N.A.	8.5
FM (30-60)	47.5	N.A.	25.5
FH (60-80)	38.7	N.A.	20.8
FVH (80-90)	17.7	N.A.	9.5
BL (0-30)	7.8	N.A.	4.2
BM (30-60)	9.8	N.A.	5.3
BH (60-80)	4.7	N.A.	2.5
BVH (80-90)	1.7	N.A.	0.9
UL (90-100)	16.1	N.A.	8.7
UH (100-180)	26.2	N.A.	14.1
Total	186.0	N.A.	100.0

BUG Rating B0-U2-G1

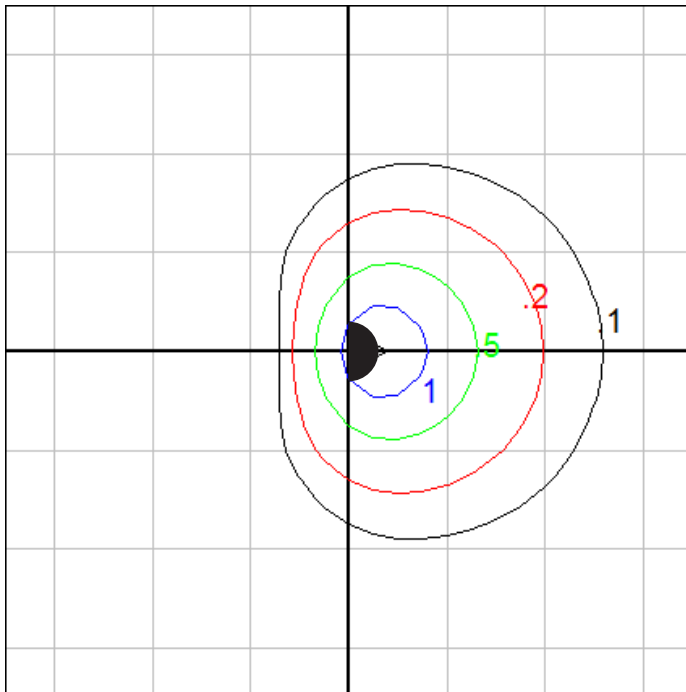

Wall Mount - Isofootcandle grid on floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

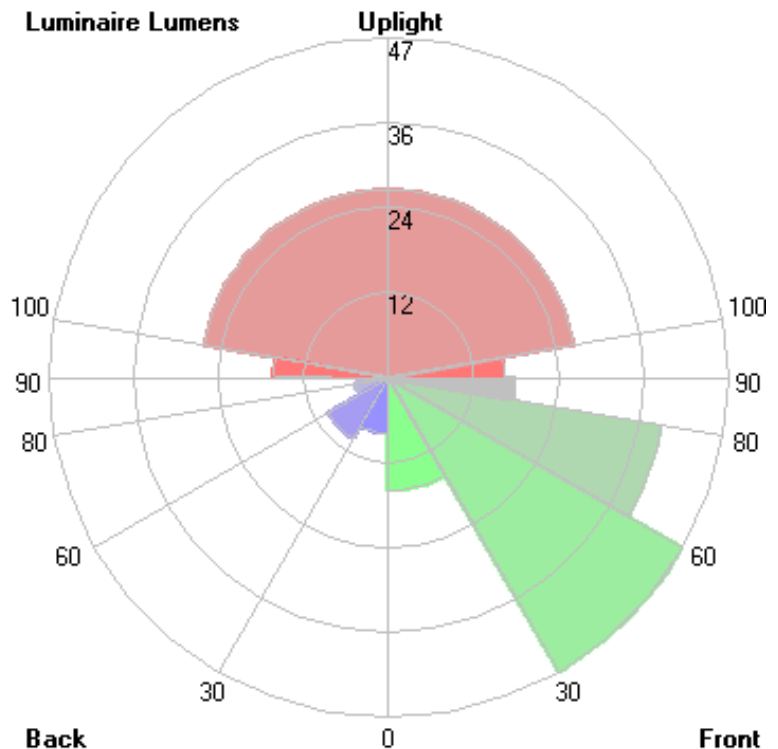

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

1/8/2018