
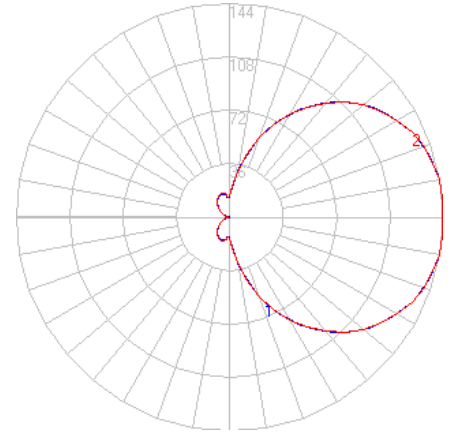


BEGA

Photometric Filename: 33601.ies

TEST: BE_33601
TEST LAB: BEGA
DATE: 11/14/2016
LUMINAIRE: 33 601
LAMP: 5.6W LED




Characteristics

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	609
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	8
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.12 ft
Luminous Width (90-270)	0.56 ft
Luminous Height	0.56 ft


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	17.1	N.A.	2.8
FM (30-60)	88.8	N.A.	14.6
FH (60-80)	97.9	N.A.	16.1
FVH (80-90)	53.5	N.A.	8.8
BL (0-30)	7.2	N.A.	1.2
BM (30-60)	20.5	N.A.	3.4
BH (60-80)	13.9	N.A.	2.3
BVH (80-90)	5.6	N.A.	0.9
UL (90-100)	59.1	N.A.	9.7
UH (100-180)	245.4	N.A.	40.3
Total	609.0	N.A.	100.0

BUG Rating B0-U3-G1

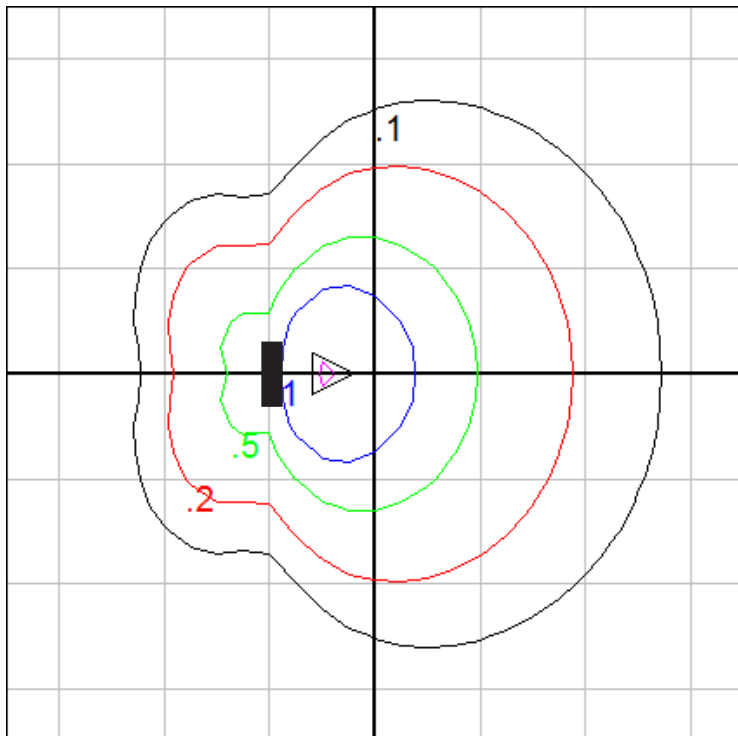

Wall Mount Fixture - Isofootcandle Grid on Floor
Mounting Height = 5 ft. Grid Spacing = 5 ft.

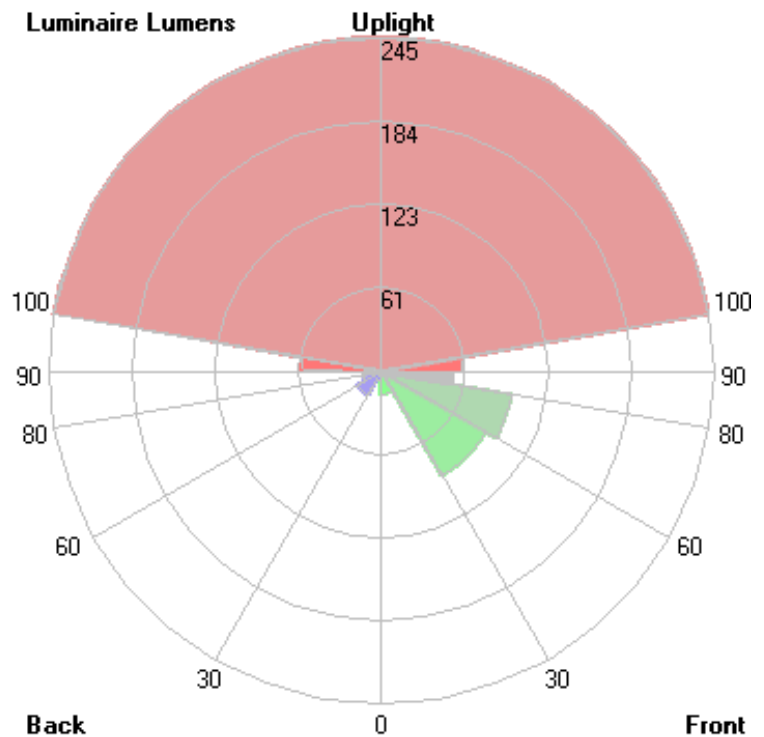

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

3/13/2018