

Tools Required:

Phillips medium screwdriver



Dimensions

A: 18-1/2 "
B: 5 "



Weight: 14.1 lbs.

Notice to Installer for 33 640:

- 1. Mounts directly over a standard recessed 4" octagonal wiring box (by others).
- 2. In conformance with UL Standard 1598, a silicone based sealant must be used between luminaire and mounting surface.

WARNING: LEDs are high quality electrical components. Please avoid touching them directly during installation.

33 640 - Installation:

- 1. Twist glass counter-clockwise to remove from luminaire housing.
- 2. Feed the luminaire wiring through the luminaire housing.
- 3. Make supply wiring and luminaire wiring connections inside the wiring box:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE


Dimming (if applicable):

DIMMING CONTROL WIRE (+) TO POSITIVE DRIVER DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE DRIVER DIM CONTROL WIRE

- 4. Attach the housing directly to the surface over a 4" standard octagonal wiring box using sufficient hardware (by others).
- 5. To replace glass, rotate clockwise into housing.

NOTE: use the mounting detail for mounting hole and wiring box location.

Figure 1

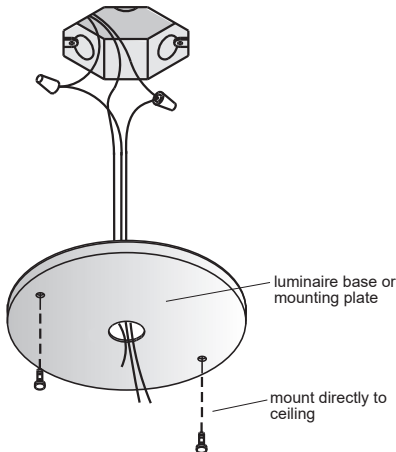

Relamping/Maintenance

Twis glass counter-clockwise and remove from housing. Clean glass using only solvent-free cleaners. Replace glass into luminaire housing by rotating clockwise.

Lamp: 52W LED

Accessories

Please refer to the appropriate accessory installation sheet for further instruction when applicable.

Replacement Parts

Description	Part No
Lens & Gasket	11278040
Driver (120-277V)	75945
LED Module (3000K)	(x2) LED-0459/830
LED Module (4000K)	(x2) LED-0459/840

Product Safety Warnings:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 90°C SUPPLY CONDUCTORS.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 90°C MIN.
