


BEGA

Photometric Filename: 33640.IES

TEST: L12120601
 TEST LAB: Light Laboratory, Inc.
 DATE: 12/6/2012
 LUMINAIRE: 33 640
 LAMP: 52W LED

All results in accordance with IESNA LM-79-08

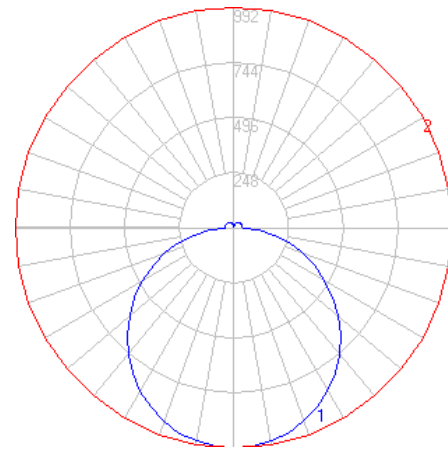


Characteristics


Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3304
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	43
Total Luminaire Watts	76.31
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	1.28
Spacing Criterion (Diagonal)	1.40
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	1.54 ft (Diameter)
Luminous Width (90-270)	1.54 ft (Diameter)
Luminous Height	0.07 ft

Zonal Lumen Summary

Zone	Lumens
0-10	94.05
10-20	270.46
20-30	412.37
30-40	501.59
40-50	527.79
50-60	490.89
60-70	400.54
70-80	271.85
80-90	121.54
90-100	43.61
100-110	41.40
110-120	37.78
120-130	31.99
130-140	24.67
140-150	17.10
150-160	10.20
160-170	4.70
170-180	1.05

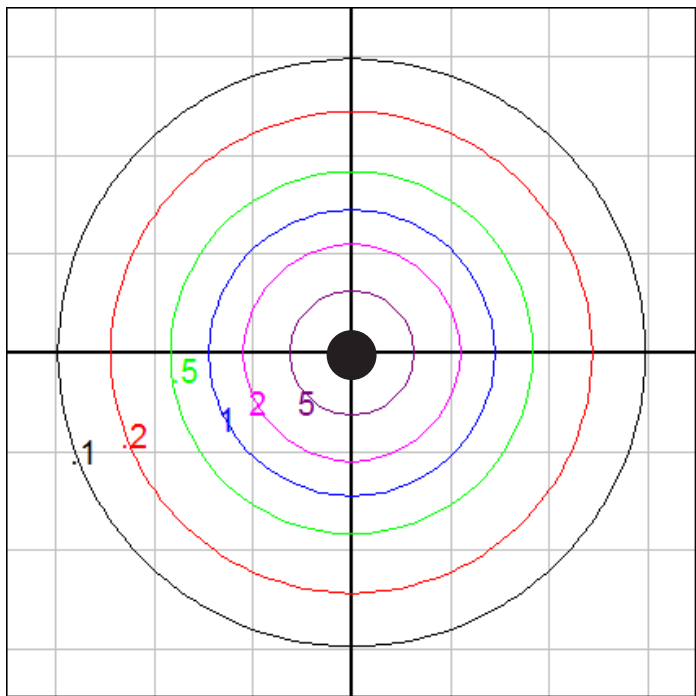

Ceiling mount - isofootcandle grid on floor
 Mounting Height = 10 ft. Grid Spacing = 10 ft.

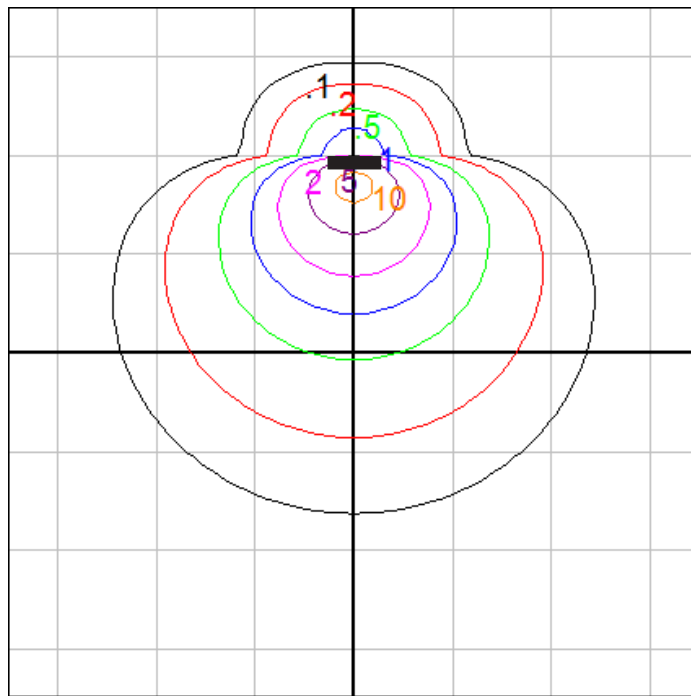

Wall mount - isofootcandle grid on floor
 Mounting Height = 5 ft. Grid Spacing = 10 ft.

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

7/24/2018