


BEGA

Photometric Filename: 33815.IES

TEST: BE_33815
TEST LAB: BEGA
DATE: 03/21/2017
LUMINAIRE: 33 815
LAMP: 7.9W LED

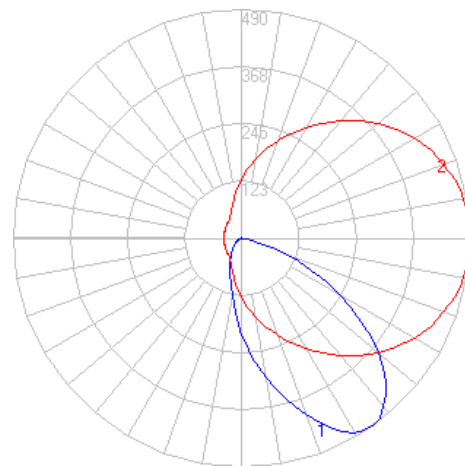


Characteristics

IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	618
Downward Total Efficiency	N.A.
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	56
Total Luminaire Watts	11.1
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Max. Cd.	490.278 (360H, 35V)
Max. Cd. (<90 Vert.)	490.278 (360H, 35V)
Max. Cd. (At 90 Deg. Vert.)	.012 (0.0%Lum)
Max. Cd. (80 to <90 Deg. Vert.)	7.373 (1.2%Lum)
Cutoff Classification (deprecated)	N.A. (absolute)


Lum. Classification System (LCS)

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	130.3	N.A.	21.1
FM (30-60)	318.0	N.A.	51.4
FH (60-80)	78.0	N.A.	12.6
FVH (80-90)	0.3	N.A.	0.0
BL (0-30)	44.7	N.A.	7.2
BM (30-60)	39.8	N.A.	6.4
BH (60-80)	7.0	N.A.	1.1
BVH (80-90)	0.2	N.A.	0.0
UL (90-100)	0.0	N.A.	0.0
UH (100-180)	0.0	N.A.	0.0
Total	618.3	N.A.	100.0

BUG Rating B0-U0-G0

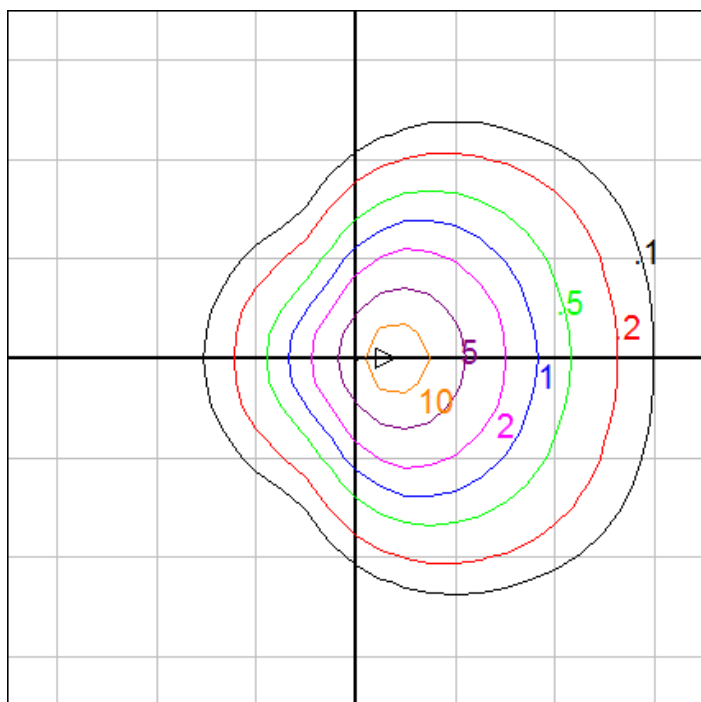

Mounting Height = 5 ft. Grid Spacing = 5 ft.

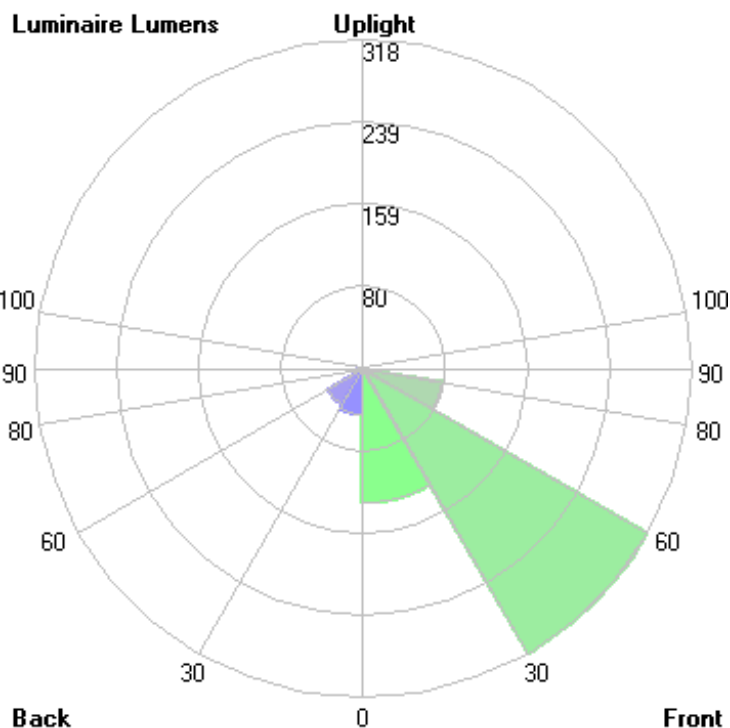

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2017

6/20/2017