


BEGA

Photometric Filename: 33831.ies

TEST: BE_33831
 TEST LAB: BEGA
 DATE: 10/07/2015
 LUMINAIRE: 33 831
 LAMP: 1.1W LED 24V DC

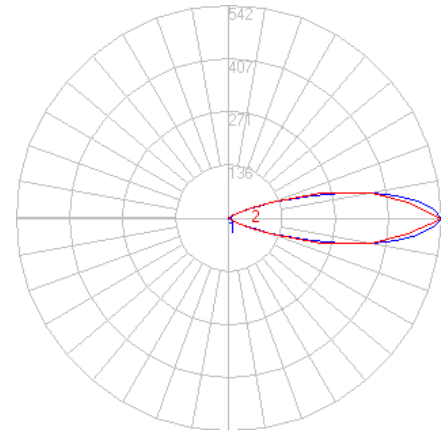


Characteristics


NEMA Type	4 H x 4 V
Maximum Candela	542.2
Maximum Candela Angle	0 H 0 V
Horizontal Beam Angle (50%)	27.8
Vertical Beam Angle (50%)	26.7
Horizontal Field Angle (10%)	52.1
Vertical Field Angle (10%)	50.0
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Beam Lumens	62
Beam Efficiency	N.A.
Field Lumens	120
Field Efficiency	N.A.
Spill Lumens	14
Luminaire Lumens	134
Total Efficiency	N.A.
Total Luminaire Watts	2

Zonal Lumen Summary

Zone	Lumens
0-10	0.00
10-20	0.00
20-30	0.02
30-40	0.04
40-50	0.12
50-60	0.48
60-70	4.76
70-80	19.67
80-90	41.39
90-100	41.39
100-110	19.67
110-120	4.76
120-130	0.48
130-140	0.12
140-150	0.04
150-160	0.02
160-170	0.00
170-180	0.00

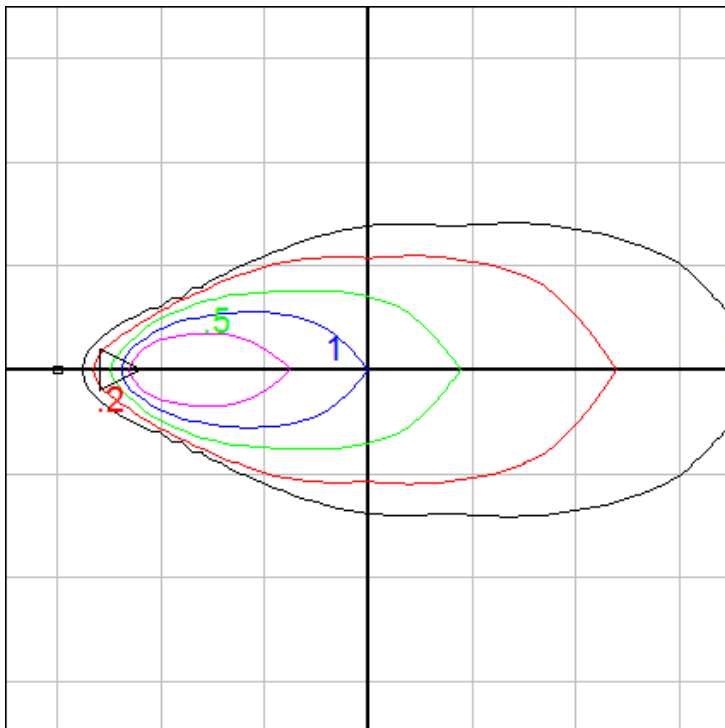

Wall Mount Fixture - Isofootcandle grid on floor
 Mounting Height = 1 ft. Grid Spacing = 2.5 ft.

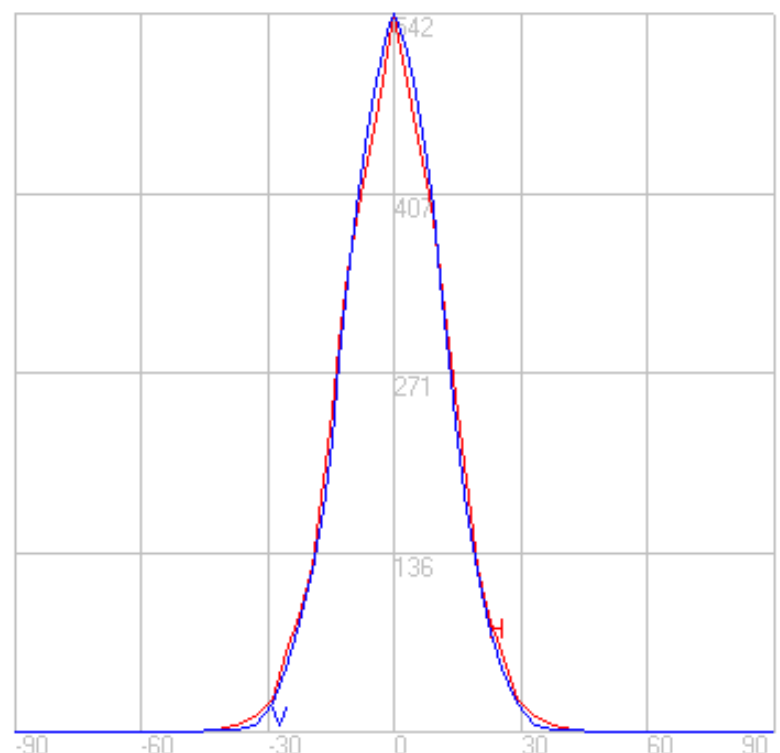

In the interest of product improvement, BEGA reserves the right to make technical changes without notice.

BEGA 1000 Bega Way, Carpinteria, CA 93013 (805)684-0533 Fax (805)566-9474 www.bega-us.com © Copyright BEGA-US 2018

6/15/2018